

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES



Indoor Luminaire Photometric Data

Description Information

Luminary Name:AD21230		Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535		Lamp Catalog: COB	Test Date: 2024/01/06
Manufacture:		Shld. Ang(°):15	Test Machine:GON-2000
Test Lab: Test		Frequency(Hz):50	Lamp CCT(K): 3000 Ra: 90
Lum. Size(W*L*H):0.017m*0.017m*0.000m		Lum. Area(m ²):0.000	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=22.5 γ=1.0	Temp.(°C): 25	Humidity(%): 50.0

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 47.610		Luminary Flux(lm): 47.609	Field Angle(10%Imax): 41.9(°)
Rated Power(W): 2		Luminary Efficiency: 100.00%	Down Lumens&Percent: 47.609lm 100.00%
Rated Voltage(V): 220		Luminary EER(lm/W): 20.718	Up Lumens&Percent: 0.000lm 0.00%
Tested Power(W): 2.298		Max. Candela(cd): 256.742	S/MH: C0_a180=0.407 C90_270=0.402
Lamps' Inside: 1		Max Cand@Ang.(°): C=0.0 γ=1.0	CIE Type: Semi-Direct
Tested Electrics(V, A, pf):220.1, 0.022, 0.467		Beam Angle(50%Imax): 23.9(°)	ErP Φ use(90°): 47.394lm
Lamp Size(W*L*H):0.017m*0.017m*0.000m		Left=-11.7°, Right=12.2°	IRF(%): 1094.185

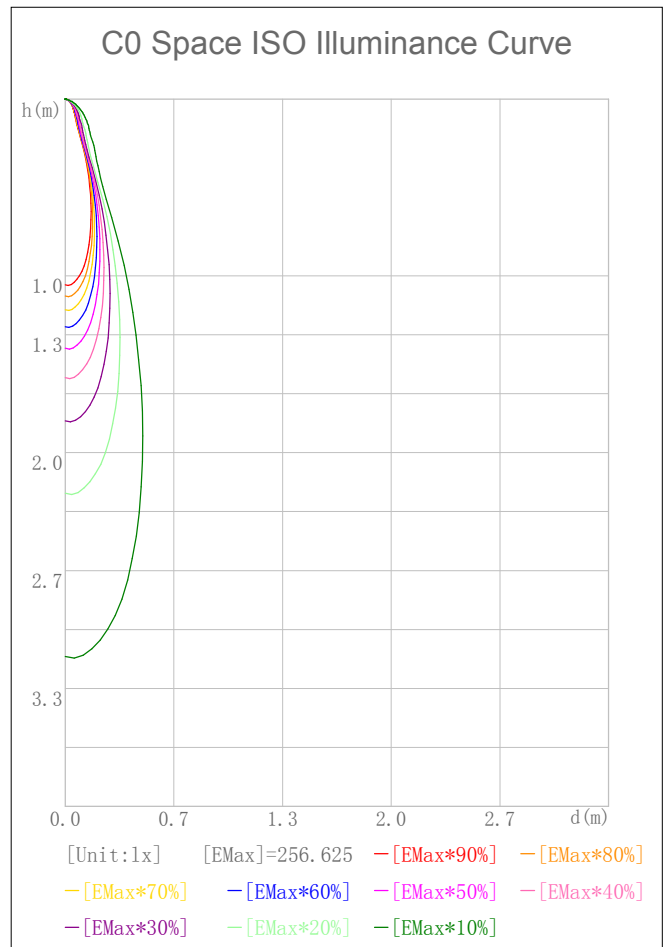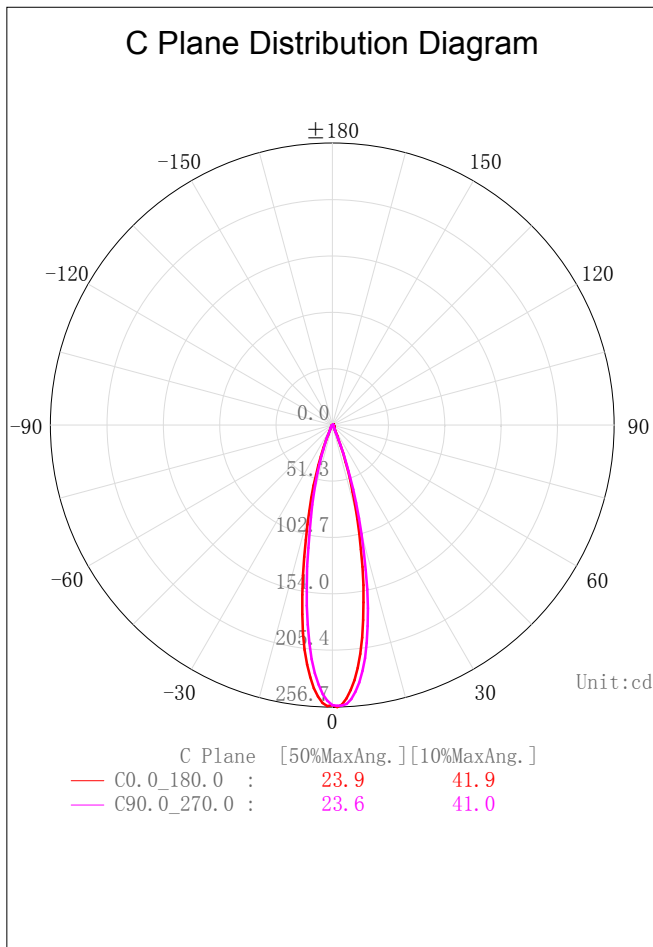



IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

2D Plane Light Intensity Distribution Curve

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06

C Plane Distribution Diagram

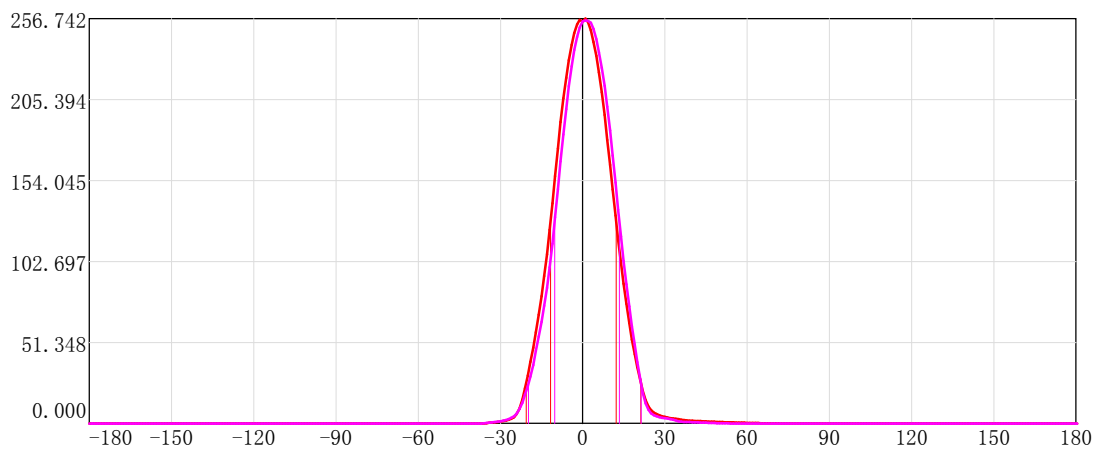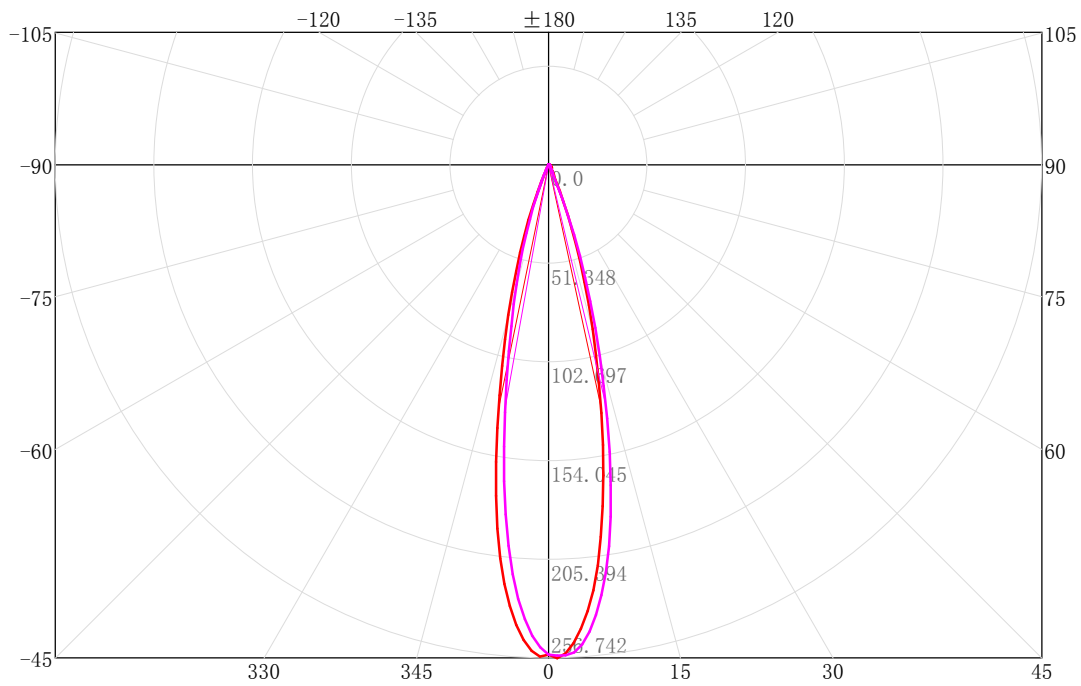

	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
—	C0.0_180.0 :	23.9	41.9	
—	C90.0_270.0 :	23.6	41.0	


IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

3D Light Intensity Distribution Modal

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06

3D Light Intensity Distribution Modal

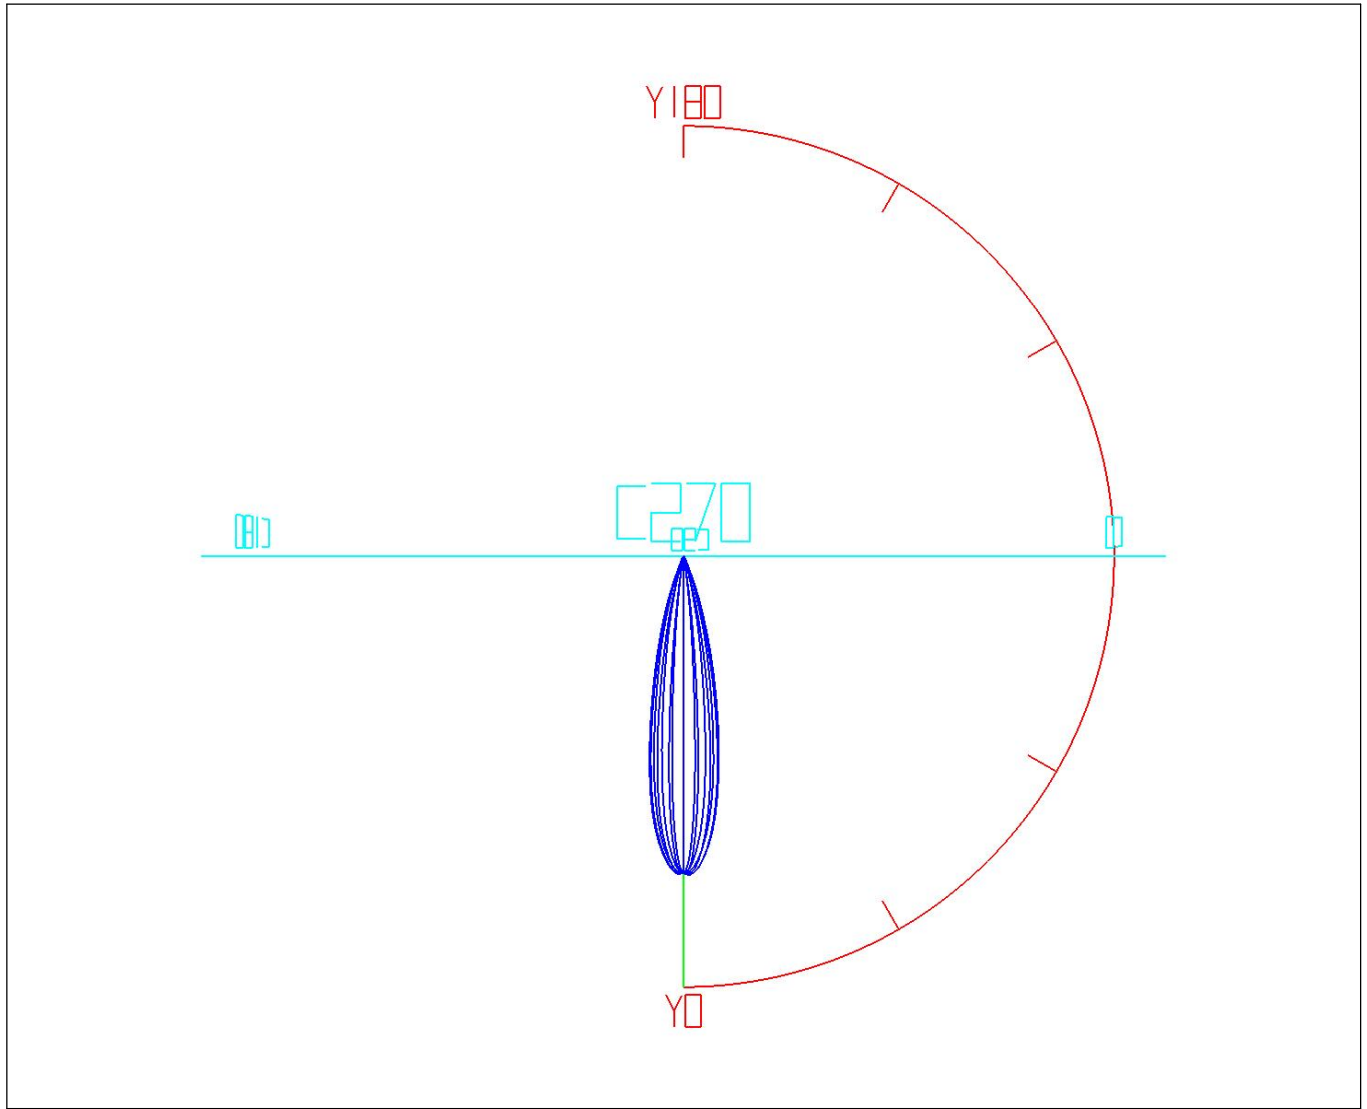

Curves: 3D Model ——— Fixture ——— Vert. HUD ——— Hori. HUD ———
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.24	0.24	0.51	0.51	47.0-48.0	0.02	47.48	0.04	99.74
1.0-2.0	0.73	0.97	1.53	2.04	48.0-49.0	0.02	47.50	0.04	99.77
2.0-3.0	1.19	2.16	2.50	4.54	49.0-50.0	0.02	47.52	0.03	99.81
3.0-4.0	1.63	3.79	3.41	7.95	50.0-51.0	0.01	47.53	0.03	99.84
4.0-5.0	2.02	5.80	4.23	12.19	51.0-52.0	0.01	47.54	0.03	99.86
5.0-6.0	2.36	8.16	4.95	17.13	52.0-53.0	0.01	47.55	0.02	99.88
6.0-7.0	2.63	10.79	5.53	22.67	53.0-54.0	0.01	47.56	0.02	99.90
7.0-8.0	2.84	13.63	5.96	28.63	54.0-55.0	0.01	47.57	0.01	99.91
8.0-9.0	2.97	16.60	6.23	34.86	55.0-56.0	0.00	47.57	0.01	99.92
9.0-10.0	3.02	19.62	6.34	41.20	56.0-57.0	0.00	47.58	0.01	99.93
10.0-11.0	3.00	22.62	6.30	47.50	57.0-58.0	0.00	47.58	0.01	99.94
11.0-12.0	2.92	25.54	6.14	53.64	58.0-59.0	0.00	47.59	0.01	99.95
12.0-13.0	2.80	28.34	5.88	59.52	59.0-60.0	0.00	47.59	0.01	99.95
13.0-14.0	2.64	30.98	5.55	65.07	60.0-61.0	0.00	47.59	0.01	99.96
14.0-15.0	2.46	33.44	5.18	70.25	61.0-62.0	0.00	47.59	0.01	99.97
15.0-16.0	2.26	35.71	4.75	75.00	62.0-63.0	0.00	47.60	0.00	99.97
16.0-17.0	2.04	37.75	4.29	79.29	63.0-64.0	0.00	47.60	0.00	99.98
17.0-18.0	1.80	39.55	3.78	83.07	64.0-65.0	0.00	47.60	0.00	99.98
18.0-19.0	1.56	41.11	3.28	86.35	65.0-66.0	0.00	47.60	0.00	99.98
19.0-20.0	1.32	42.43	2.77	89.12	66.0-67.0	0.00	47.60	0.00	99.99
20.0-21.0	1.07	43.50	2.24	91.36	67.0-68.0	0.00	47.60	0.00	99.99
21.0-22.0	0.82	44.31	1.71	93.07	68.0-69.0	0.00	47.61	0.00	99.99
22.0-23.0	0.59	44.90	1.24	94.31	69.0-70.0	0.00	47.61	0.00	99.99
23.0-24.0	0.42	45.32	0.87	95.18	70.0-71.0	0.00	47.61	0.00	99.99
24.0-25.0	0.30	45.62	0.64	95.82	71.0-72.0	0.00	47.61	0.00	100.00
25.0-26.0	0.24	45.86	0.51	96.33	72.0-73.0	0.00	47.61	0.00	100.00
26.0-27.0	0.20	46.06	0.43	96.75	73.0-74.0	0.00	47.61	0.00	100.00
27.0-28.0	0.18	46.24	0.37	97.12	74.0-75.0	0.00	47.61	0.00	100.00
28.0-29.0	0.16	46.40	0.33	97.45	75.0-76.0	0.00	47.61	0.00	100.00
29.0-30.0	0.14	46.53	0.29	97.74	76.0-77.0	0.00	47.61	0.00	100.00
30.0-31.0	0.13	46.66	0.26	98.00	77.0-78.0	0.00	47.61	0.00	100.00
31.0-32.0	0.11	46.77	0.24	98.25	78.0-79.0	0.00	47.61	0.00	100.00
32.0-33.0	0.10	46.88	0.22	98.47	79.0-80.0	0.00	47.61	0.00	100.00
33.0-34.0	0.09	46.97	0.20	98.66	80.0-81.0	0.00	47.61	0.00	100.00
34.0-35.0	0.08	47.05	0.16	98.82	81.0-82.0	0.00	47.61	0.00	100.00
35.0-36.0	0.06	47.11	0.12	98.95	82.0-83.0	0.00	47.61	0.00	100.00
36.0-37.0	0.05	47.15	0.10	99.04	83.0-84.0	0.00	47.61	0.00	100.00
37.0-38.0	0.04	47.19	0.08	99.13	84.0-85.0	0.00	47.61	0.00	100.00
38.0-39.0	0.04	47.23	0.08	99.21	85.0-86.0	0.00	47.61	0.00	100.00
39.0-40.0	0.04	47.27	0.08	99.28	86.0-87.0	0.00	47.61	0.00	100.00
40.0-41.0	0.03	47.30	0.07	99.35	87.0-88.0	0.00	47.61	0.00	100.00
41.0-42.0	0.03	47.33	0.07	99.42	88.0-89.0	0.00	47.61	0.00	100.00
42.0-43.0	0.03	47.36	0.06	99.48	89.0-90.0	0.00	47.61	0.00	100.00
43.0-44.0	0.03	47.39	0.06	99.54	90.0-91.0	0.00	47.61	0.00	100.00
44.0-45.0	0.03	47.42	0.05	99.59	91.0-92.0	0.00	47.61	0.00	100.00
45.0-46.0	0.02	47.44	0.05	99.65	92.0-93.0	0.00	47.61	0.00	100.00
46.0-47.0	0.02	47.46	0.05	99.69	93.0-94.0	0.00	47.61	0.00	100.00

-
-
-

IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	47.61	0.00	100.00	141.0-142.0	0.00	47.61	0.00	100.00
95.0-96.0	0.00	47.61	0.00	100.00	142.0-143.0	0.00	47.61	0.00	100.00
96.0-97.0	0.00	47.61	0.00	100.00	143.0-144.0	0.00	47.61	0.00	100.00
97.0-98.0	0.00	47.61	0.00	100.00	144.0-145.0	0.00	47.61	0.00	100.00
98.0-99.0	0.00	47.61	0.00	100.00	145.0-146.0	0.00	47.61	0.00	100.00
99.0-100.0	0.00	47.61	0.00	100.00	146.0-147.0	0.00	47.61	0.00	100.00
100.0-101.0	0.00	47.61	0.00	100.00	147.0-148.0	0.00	47.61	0.00	100.00
101.0-102.0	0.00	47.61	0.00	100.00	148.0-149.0	0.00	47.61	0.00	100.00
102.0-103.0	0.00	47.61	0.00	100.00	149.0-150.0	0.00	47.61	0.00	100.00
103.0-104.0	0.00	47.61	0.00	100.00	150.0-151.0	0.00	47.61	0.00	100.00
104.0-105.0	0.00	47.61	0.00	100.00	151.0-152.0	0.00	47.61	0.00	100.00
105.0-106.0	0.00	47.61	0.00	100.00	152.0-153.0	0.00	47.61	0.00	100.00
106.0-107.0	0.00	47.61	0.00	100.00	153.0-154.0	0.00	47.61	0.00	100.00
107.0-108.0	0.00	47.61	0.00	100.00	154.0-155.0	0.00	47.61	0.00	100.00
108.0-109.0	0.00	47.61	0.00	100.00	155.0-156.0	0.00	47.61	0.00	100.00
109.0-110.0	0.00	47.61	0.00	100.00	156.0-157.0	0.00	47.61	0.00	100.00
110.0-111.0	0.00	47.61	0.00	100.00	157.0-158.0	0.00	47.61	0.00	100.00
111.0-112.0	0.00	47.61	0.00	100.00	158.0-159.0	0.00	47.61	0.00	100.00
112.0-113.0	0.00	47.61	0.00	100.00	159.0-160.0	0.00	47.61	0.00	100.00
113.0-114.0	0.00	47.61	0.00	100.00	160.0-161.0	0.00	47.61	0.00	100.00
114.0-115.0	0.00	47.61	0.00	100.00	161.0-162.0	0.00	47.61	0.00	100.00
115.0-116.0	0.00	47.61	0.00	100.00	162.0-163.0	0.00	47.61	0.00	100.00
116.0-117.0	0.00	47.61	0.00	100.00	163.0-164.0	0.00	47.61	0.00	100.00
117.0-118.0	0.00	47.61	0.00	100.00	164.0-165.0	0.00	47.61	0.00	100.00
118.0-119.0	0.00	47.61	0.00	100.00	165.0-166.0	0.00	47.61	0.00	100.00
119.0-120.0	0.00	47.61	0.00	100.00	166.0-167.0	0.00	47.61	0.00	100.00
120.0-121.0	0.00	47.61	0.00	100.00	167.0-168.0	0.00	47.61	0.00	100.00
121.0-122.0	0.00	47.61	0.00	100.00	168.0-169.0	0.00	47.61	0.00	100.00
122.0-123.0	0.00	47.61	0.00	100.00	169.0-170.0	0.00	47.61	0.00	100.00
123.0-124.0	0.00	47.61	0.00	100.00	170.0-171.0	0.00	47.61	0.00	100.00
124.0-125.0	0.00	47.61	0.00	100.00	171.0-172.0	0.00	47.61	0.00	100.00
125.0-126.0	0.00	47.61	0.00	100.00	172.0-173.0	0.00	47.61	0.00	100.00
126.0-127.0	0.00	47.61	0.00	100.00	173.0-174.0	0.00	47.61	0.00	100.00
127.0-128.0	0.00	47.61	0.00	100.00	174.0-175.0	0.00	47.61	0.00	100.00
128.0-129.0	0.00	47.61	0.00	100.00	175.0-176.0	0.00	47.61	0.00	100.00
129.0-130.0	0.00	47.61	0.00	100.00	176.0-177.0	0.00	47.61	0.00	100.00
130.0-131.0	0.00	47.61	0.00	100.00	177.0-178.0	0.00	47.61	0.00	100.00
131.0-132.0	0.00	47.61	0.00	100.00	178.0-179.0	0.00	47.61	0.00	100.00
132.0-133.0	0.00	47.61	0.00	100.00	179.0-180.0	0.00	47.61	0.00	100.00
133.0-134.0	0.00	47.61	0.00	100.00					
134.0-135.0	0.00	47.61	0.00	100.00					
135.0-136.0	0.00	47.61	0.00	100.00					
136.0-137.0	0.00	47.61	0.00	100.00					
137.0-138.0	0.00	47.61	0.00	100.00					
138.0-139.0	0.00	47.61	0.00	100.00					
139.0-140.0	0.00	47.61	0.00	100.00					
140.0-141.0	0.00	47.61	0.00	100.00					


-
-
-

IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Rectangle ISO Lighting Intensity Diagram

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06

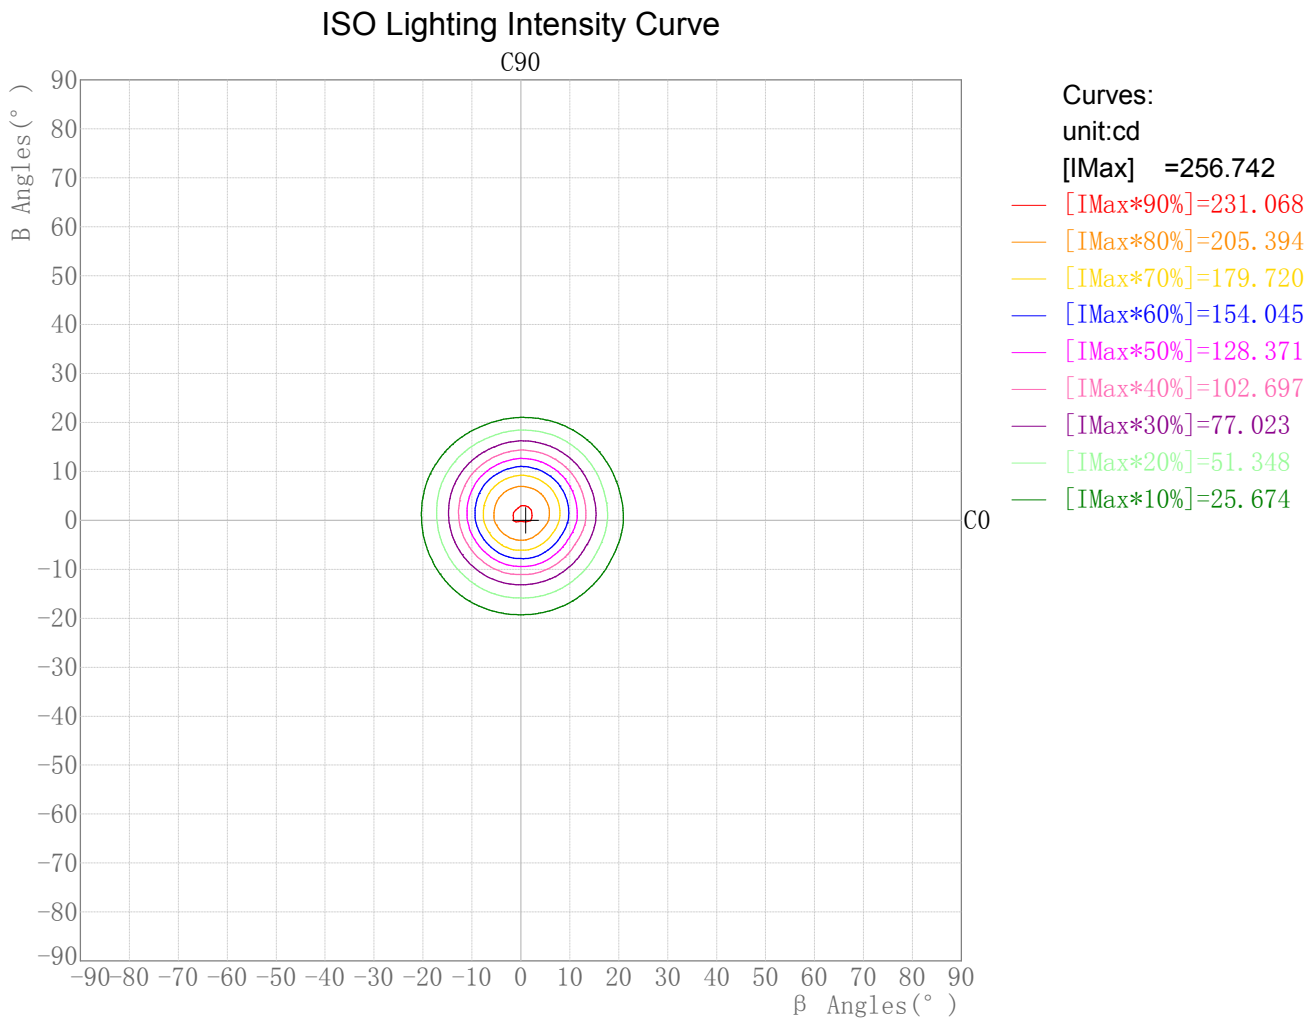

Maximum Light Intensity(cd): 256.74


Maximum Cand.@Angle: H=1.0°,V=0.0°

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Round ISO Lighting Intensity Diagram

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06

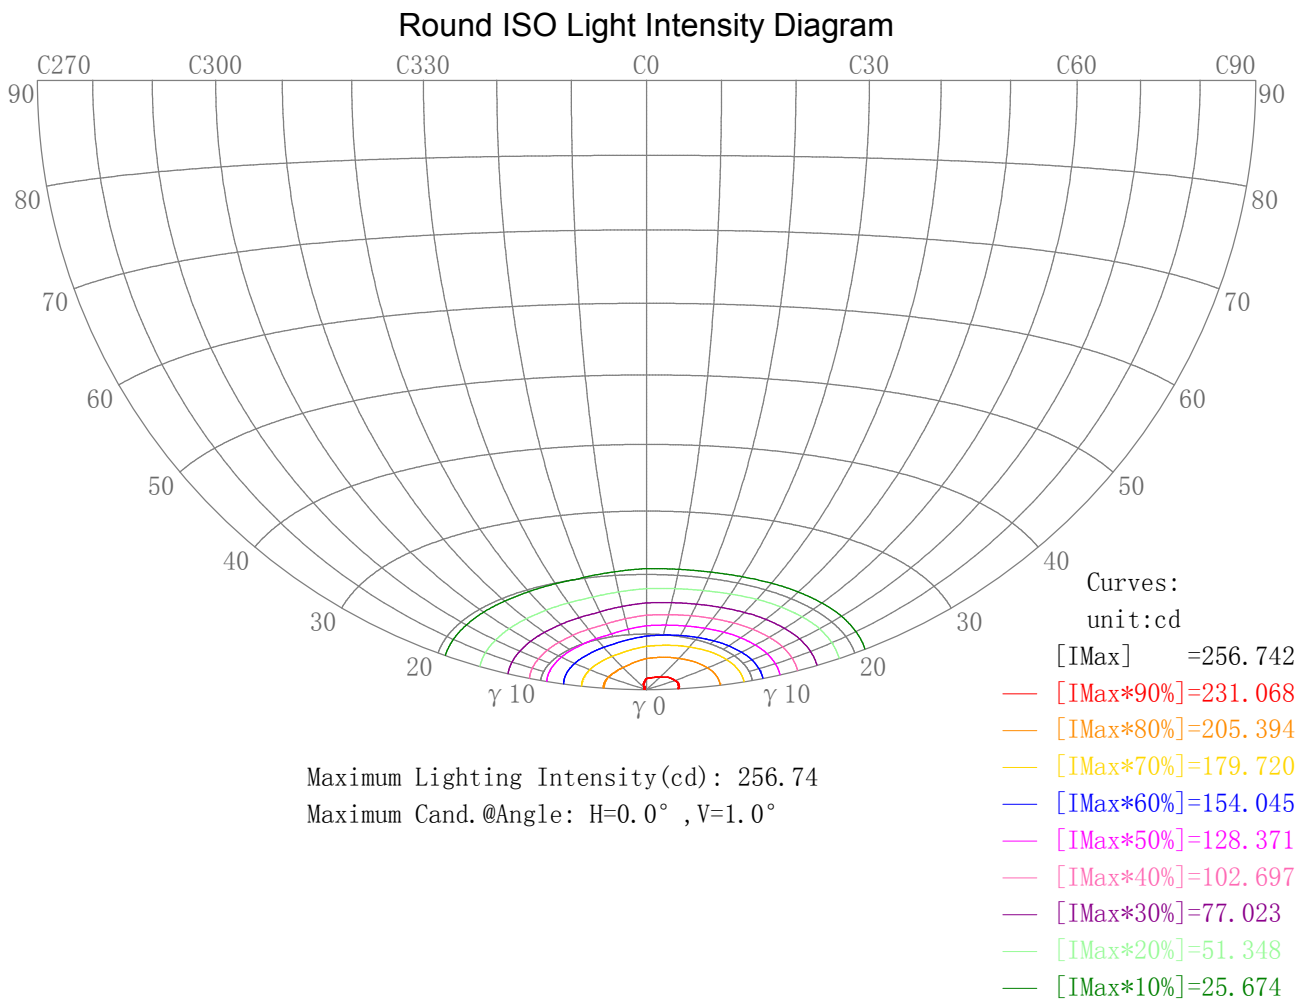


IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Plane ISO-Illuminance Diagram

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06

Plane ISO-Illuminance Curve

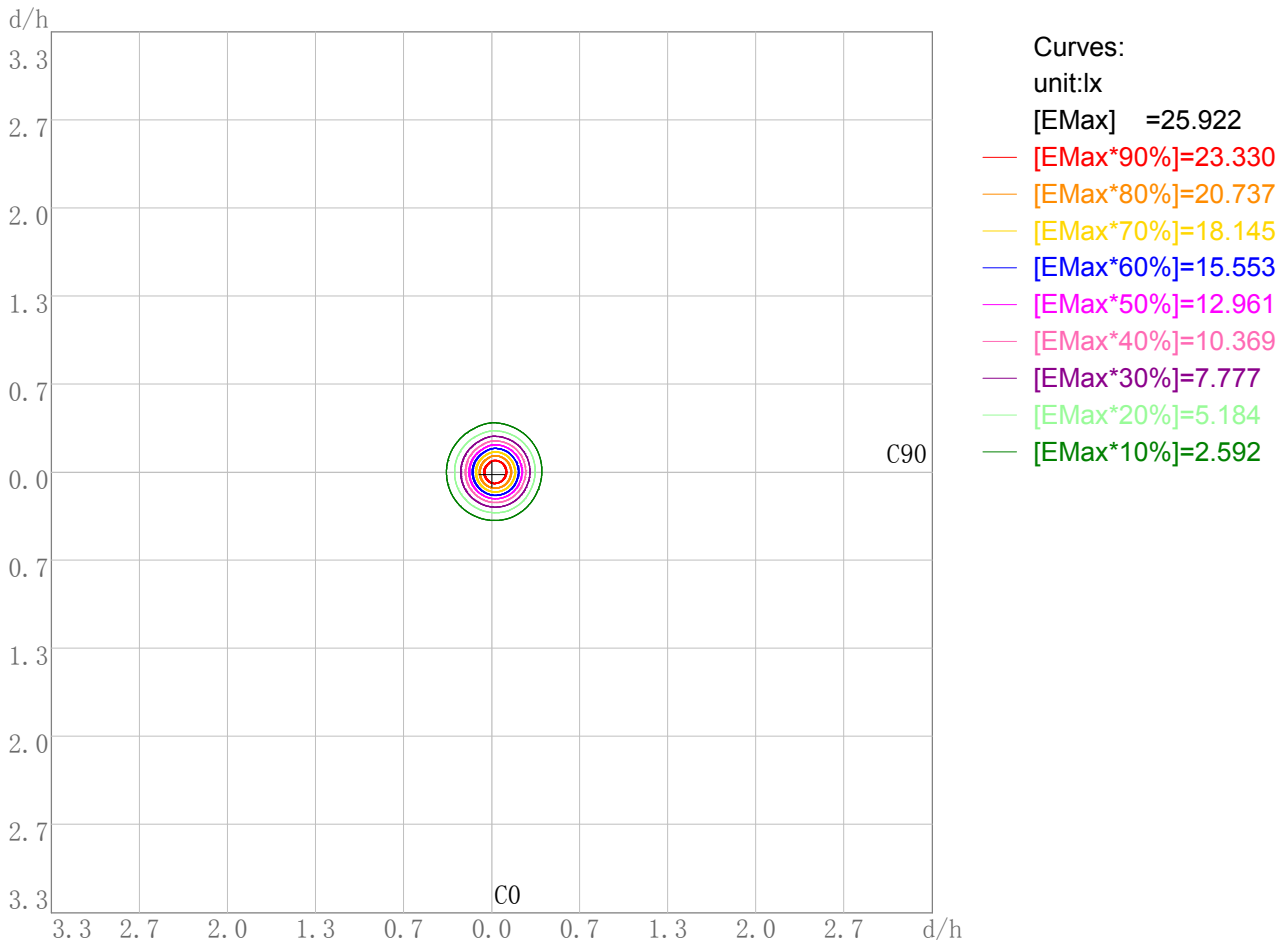

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 25.92

Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0


IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

3D Plane ISO Illuminance Diagram

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/06

3D Plane Illuminance Modal

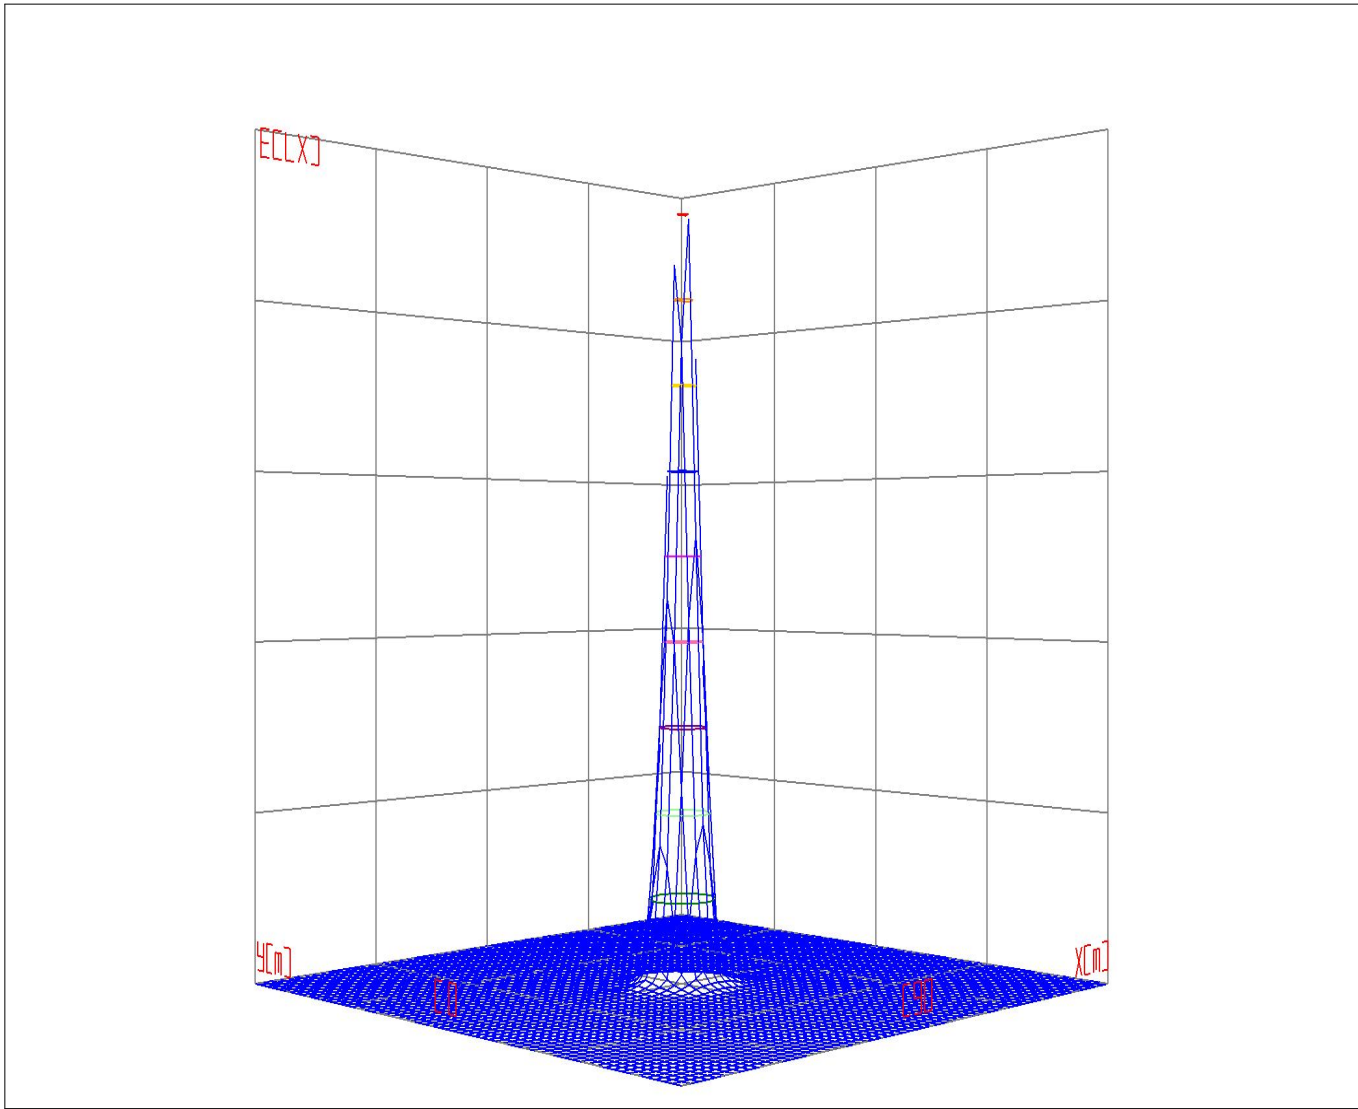

Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0


IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Space ISO Illuminance Diagram

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06

Space ISO Illuminance Curve

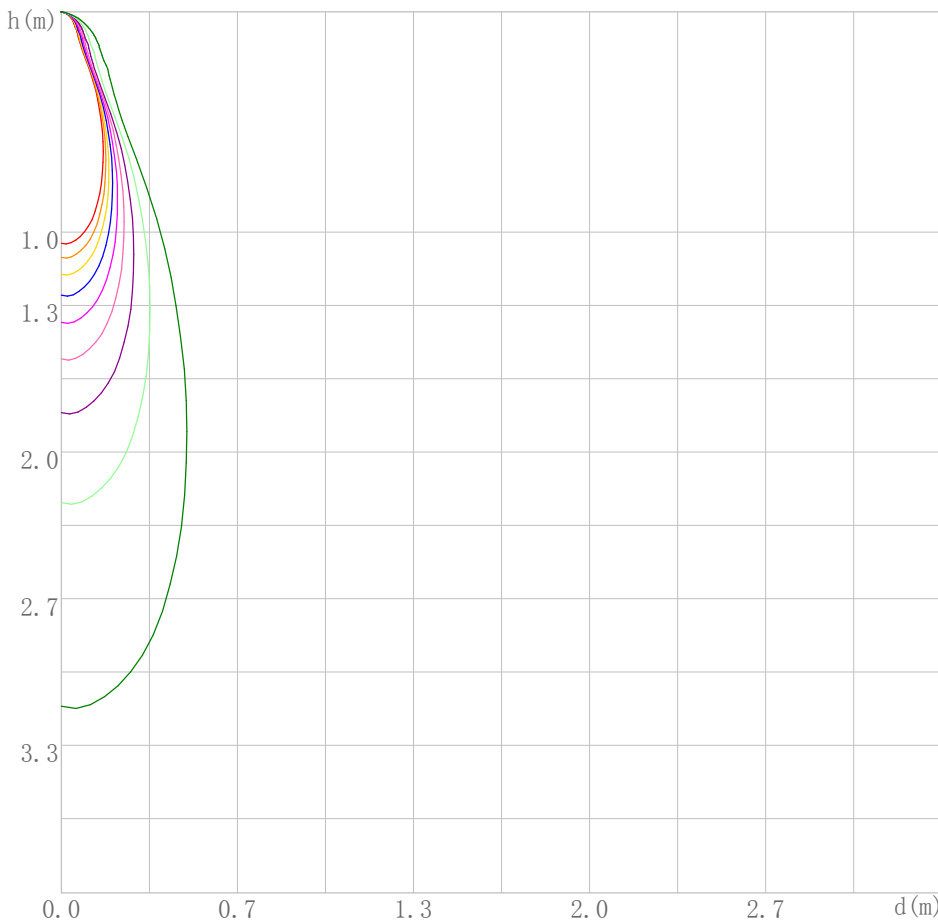

Curves:

[Unit: lx]

[EMax] =256.625

— [EMax*90%]=230.962

— [EMax*80%]=205.300

— [EMax*70%]=179.637

— [EMax*60%]=153.975

— [EMax*50%]=128.312

— [EMax*40%]=102.650

— [EMax*30%]=76.987

— [EMax*20%]=51.325

— [EMax*10%]=25.662

Space Plane Maximum Illuminance and @Angle:256.62lx,1.0deg

Plane Maximum Lighting Intensity and @Angle:256.742cd,0deg


IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Illuminance-Distance Diagram

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06

Illuminance-Distance Curve

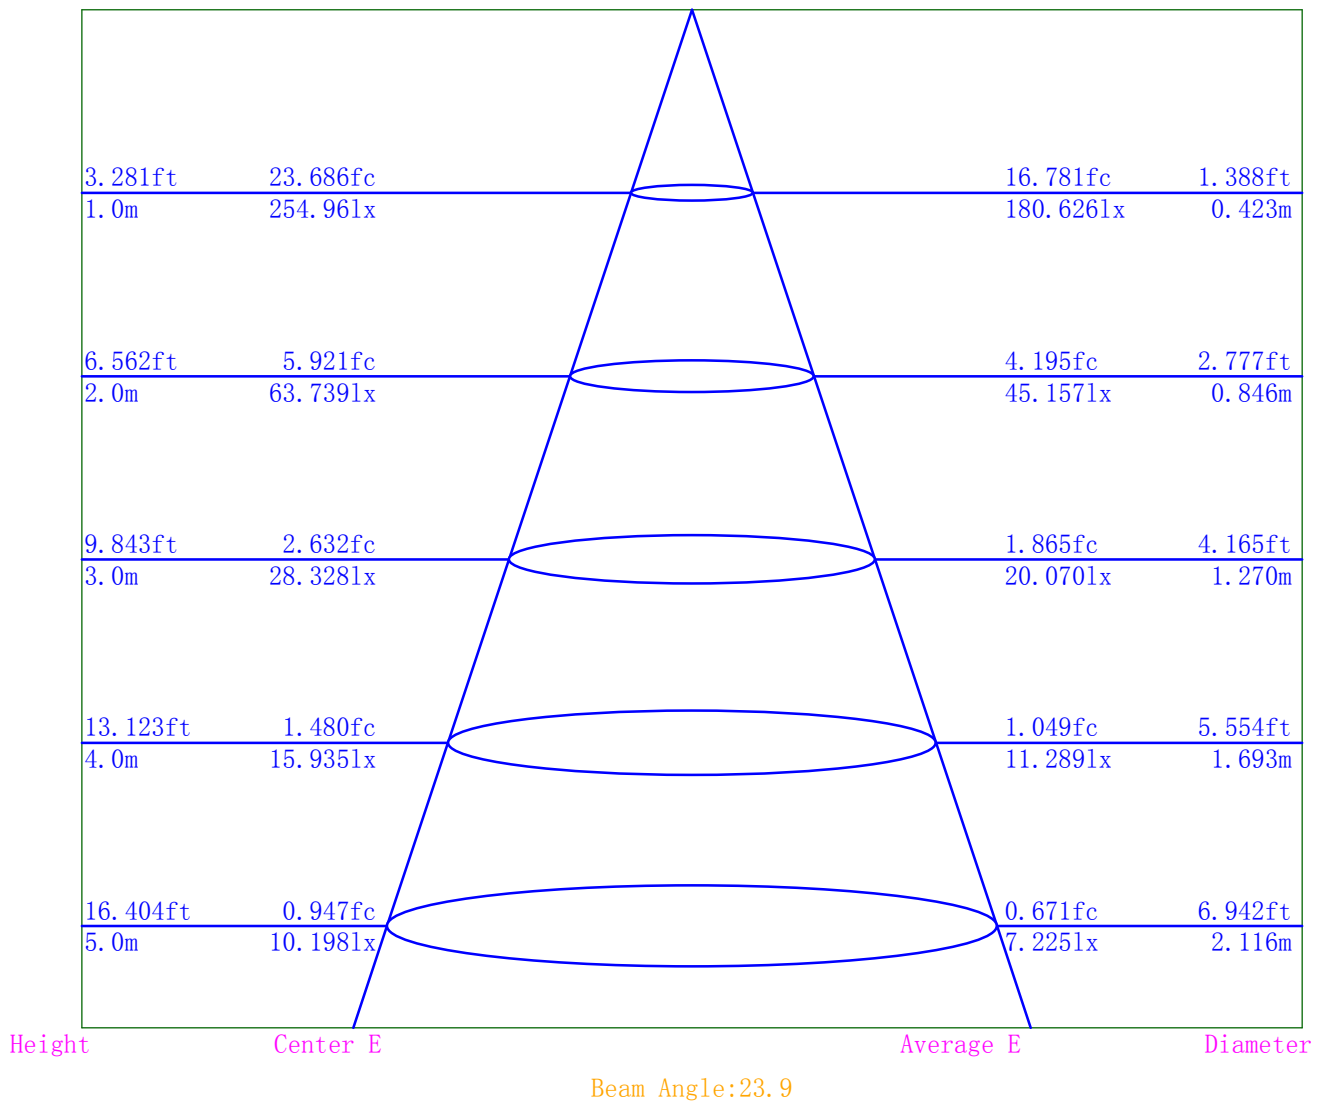

IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Indoor Luminance Limiting Curves

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06


Glare Grade Table

GI	Quality	Using Illuminance							
		a	b	c	d	e	f	g	h
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	8265	6944	5458	4362	3142	1488	487	0	0
C90	3214	1636	110	0	0	0	0	0	0

Luminance Limiting Curve

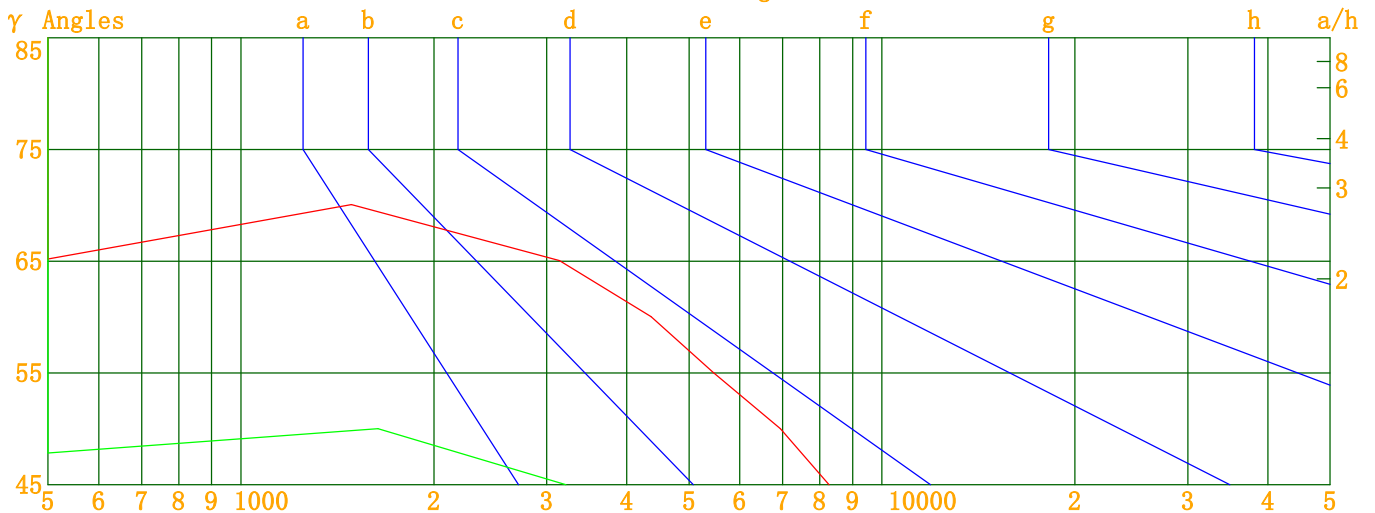

Luminous Size: Length(m)=-0.017 Width(m)=-0.017 Height(m)=0.000 Area(m^2)=0.000227
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —


-
-
-

IES Indoor Report

Photometric Filename: AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Indoor Budgetary Estimate Table

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/06

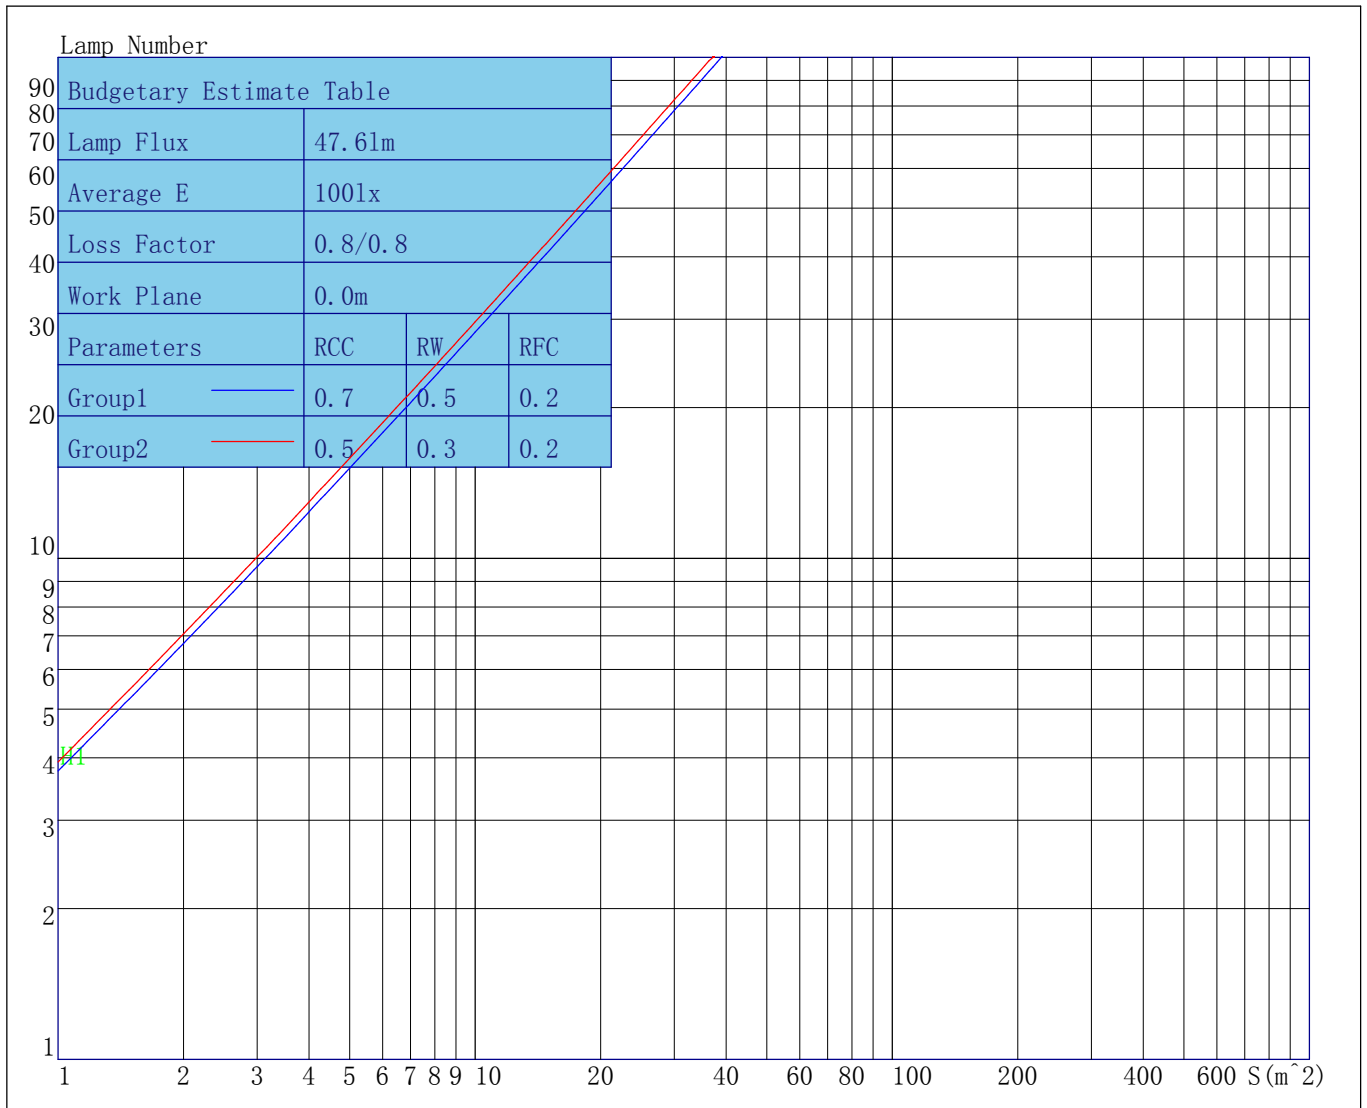

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
 Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
 Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Indoor Coefficient of Utilization Table

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/06

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95
3	109	104	101	98	107	103	100	98	101	98	96	98	96	95	96	95	93	92
4	106	101	97	94	104	100	96	94	98	95	93	96	94	92	94	92	91	90
5	103	98	94	91	102	97	93	91	95	92	90	94	91	89	92	90	89	87
6	100	95	91	88	99	94	91	88	93	90	87	92	89	87	90	88	86	85
7	98	92	88	86	97	92	88	85	91	87	85	90	87	85	89	86	84	83
8	96	90	86	83	95	89	86	83	88	85	83	88	85	83	87	84	82	81
9	94	88	84	81	93	87	84	81	86	83	81	86	83	81	85	82	81	80
10	92	85	82	79	91	85	82	79	84	81	79	84	81	79	83	81	79	78

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Unified Glare Rating Table

Lum. Name: AD21230	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/06

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	7.2	8.1	7.6	8.4	8.7	5.1	6.0	5.5	6.3	6.6
	Y=3H	7.4	8.2	7.8	8.5	8.9	4.9	5.7	5.3	6.0	6.4
	Y=4H	7.3	8.1	7.7	8.4	8.8	4.8	5.5	5.2	5.9	6.3
	Y=6H	7.2	7.9	7.6	8.2	8.6	4.7	5.3	5.1	5.7	6.1
	Y=8H	7.2	7.8	7.6	8.2	8.6	4.6	5.2	5.0	5.6	6.0
	Y=12H	7.1	7.7	7.5	8.1	8.5	4.5	5.1	5.0	5.5	5.9
X=4H	Y=2H	6.9	7.6	7.3	7.9	8.3	4.8	5.5	5.2	5.9	6.3
	Y=3H	7.1	7.6	7.5	8.1	8.5	4.6	5.2	5.0	5.6	6.0
	Y=4H	7.0	7.5	7.4	7.9	8.4	4.4	5.0	4.9	5.4	5.8
	Y=6H	6.9	7.3	7.3	7.7	8.2	4.3	4.8	4.8	5.2	5.7
	Y=8H	6.8	7.2	7.3	7.6	8.1	4.2	4.6	4.7	5.1	5.6
	Y=12H	6.7	7.1	7.2	7.5	8.0	4.2	4.5	4.7	5.0	5.5
X=8H	Y=4H	6.8	7.2	7.3	7.6	8.1	4.2	4.6	4.7	5.1	5.6
	Y=6H	6.6	7.0	7.2	7.5	8.0	4.1	4.4	4.6	4.9	5.4
	Y=8H	6.6	6.8	7.1	7.4	7.9	4.0	4.3	4.6	4.8	5.3
	Y=12H	6.5	6.7	7.0	7.2	7.8	4.0	4.2	4.5	4.7	5.3
X=12H	Y=4H	6.7	7.1	7.2	7.5	8.0	4.2	4.5	4.7	5.0	5.5
	Y=6H	6.6	6.9	7.1	7.3	7.9	4.0	4.3	4.6	4.8	5.3
	Y=8H	6.5	6.7	7.0	7.2	7.8	4.0	4.2	4.5	4.7	5.3
Variations with the objerver position at spacings											
S=1.0H	0.0/0.0					0.0/0.0					
S=1.5H	5.9/0.0					0.0/0.0					
S=2.0H	7.4/-29.7					0.0/0.0					
Reduced UGR Table:											
Nordic Standard Table:	BKO					BKO					
Correction Value	0.2					0.0					

o the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.

-
-
-

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Candela Tabulation

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 0.0	254.96	254.96	254.96	254.96	254.96	254.96	254.96	254.96	254.96	254.96	254.96	254.96
γ 1.0	256.74	256.48	256.16	255.75	255.52	255.45	255.62	255.21	255.89	253.81	252.46	251.53
γ 2.0	254.46	255.83	256.52	256.31	255.38	255.02	254.68	253.42	253.05	249.60	247.29	245.87
γ 3.0	249.19	252.39	254.43	254.90	254.12	253.02	251.56	249.26	247.52	242.79	239.46	237.74
γ 4.0	241.99	246.25	249.33	250.76	250.16	248.36	246.05	242.78	240.08	234.02	229.64	227.28
γ 5.0	233.12	238.38	241.92	243.82	243.82	241.70	238.71	234.54	230.43	223.53	218.29	215.23
γ 6.0	222.57	228.86	233.17	235.17	235.48	233.43	230.10	224.65	219.21	211.06	204.70	201.17
γ 7.0	209.97	217.64	222.82	225.16	225.58	223.44	219.71	212.98	206.27	196.40	188.87	185.03
γ 8.0	195.57	204.53	210.66	213.31	214.13	211.24	207.04	199.31	191.20	179.83	171.80	167.83
γ 9.0	179.76	189.77	196.62	199.71	200.88	197.42	192.52	183.63	174.38	162.21	154.08	150.05
γ 10.0	164.07	173.79	180.89	184.61	186.00	181.83	176.58	166.86	156.97	144.42	136.28	132.56
γ 11.0	148.43	157.05	164.57	168.67	169.82	164.82	159.69	149.76	139.54	127.38	119.59	116.12
γ 12.0	131.96	140.21	147.81	151.81	152.76	147.29	142.23	132.70	122.69	111.86	104.57	101.17
γ 13.0	116.42	124.00	131.19	134.79	135.48	130.10	124.96	116.65	107.38	97.82	90.99	87.82
γ 14.0	101.95	108.85	115.06	118.50	118.70	113.57	108.65	101.84	93.51	85.00	78.78	76.03
γ 15.0	88.65	94.49	99.94	102.91	103.05	98.06	93.85	88.36	80.86	73.15	67.78	65.60
γ 16.0	75.89	80.58	85.83	88.25	88.31	83.53	80.34	75.90	68.91	61.96	57.61	56.13
γ 17.0	63.72	67.69	72.81	75.03	74.27	69.93	68.02	64.40	57.83	51.55	47.90	46.81
γ 18.0	53.11	56.52	61.02	63.05	61.66	57.72	56.74	54.24	48.06	42.47	39.15	37.93
γ 19.0	44.14	46.55	50.16	51.77	49.96	46.50	46.00	44.52	39.09	34.50	32.02	30.56
γ 20.0	35.77	37.19	39.78	40.68	38.90	35.88	35.70	34.78	30.53	27.06	25.53	24.49
γ 21.0	27.89	28.40	29.84	30.02	28.50	25.95	25.99	25.40	22.36	20.05	19.35	18.72
γ 22.0	20.67	20.36	20.95	20.76	19.48	17.33	17.66	17.37	15.13	13.85	13.69	13.49
γ 23.0	14.75	13.87	13.95	13.70	12.83	11.31	11.62	11.39	9.61	9.01	9.05	9.32
γ 24.0	10.79	9.56	9.43	9.23	8.69	7.87	8.01	7.74	6.10	5.88	6.05	6.41
γ 25.0	8.43	7.07	6.93	6.83	6.50	6.09	6.12	5.86	4.10	4.15	4.37	4.61
γ 26.0	6.99	5.62	5.58	5.67	5.35	5.09	5.12	4.91	3.05	3.17	3.37	3.53
γ 27.0	6.06	4.67	4.71	4.93	4.62	4.43	4.45	4.25	2.38	2.52	2.65	2.76
γ 28.0	5.28	3.96	4.08	4.39	4.09	3.95	4.00	3.79	1.89	2.05	2.11	2.18
γ 29.0	4.67	3.42	3.56	4.00	3.70	3.62	3.69	3.40	1.56	1.68	1.63	1.72
γ 30.0	4.21	2.97	3.14	3.67	3.43	3.37	3.48	3.11	1.31	1.37	1.28	1.35
γ 31.0	3.81	2.64	2.84	3.37	3.15	3.09	3.27	2.84	1.08	1.13	1.06	1.07
γ 32.0	3.51	2.37	2.62	3.16	2.83	2.77	2.98	2.64	0.88	0.90	0.87	0.86
γ 33.0	3.28	2.13	2.40	2.85	2.48	2.32	2.61	2.45	0.72	0.67	0.75	0.71
γ 34.0	3.05	1.93	2.20	2.44	1.97	1.81	2.14	2.15	0.57	0.42	0.61	0.58
γ 35.0	2.74	1.70	1.83	1.76	1.46	1.34	1.57	1.59	0.29	0.19	0.40	0.42
γ 36.0	2.40	1.45	1.35	1.29	1.17	1.16	1.21	1.23	0.01	0.00	0.04	0.16
γ 37.0	2.15	1.28	1.17	1.10	1.08	1.06	1.07	1.12	0.00	0.00	0.00	0.00
γ 38.0	2.04	1.16	1.08	1.02	1.02	0.97	0.99	1.01	0.00	0.00	0.00	0.00
γ 39.0	1.91	1.06	1.00	0.95	0.93	0.87	0.90	0.94	0.00	0.00	0.00	0.00
γ 40.0	1.78	0.96	0.92	0.87	0.85	0.78	0.82	0.86	0.00	0.00	0.00	0.00
γ 41.0	1.67	0.87	0.84	0.78	0.78	0.74	0.76	0.79	0.00	0.00	0.00	0.00
γ 42.0	1.58	0.81	0.77	0.72	0.73	0.67	0.70	0.71	0.00	0.00	0.00	0.00
γ 43.0	1.53	0.77	0.68	0.68	0.67	0.61	0.64	0.66	0.00	0.00	0.00	0.00
γ 44.0	1.42	0.74	0.61	0.63	0.59	0.58	0.56	0.57	0.00	0.00	0.00	0.00
γ 45.0	1.33	0.70	0.57	0.54	0.52	0.49	0.50	0.53	0.00	0.00	0.00	0.00
γ 46.0	1.27	0.66	0.51	0.50	0.49	0.45	0.45	0.47	0.00	0.00	0.00	0.00

-
-
-

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 47.0	1.20	0.59	0.45	0.45	0.43	0.38	0.39	0.40	0.00	0.00	0.00	0.00
γ 48.0	1.14	0.51	0.38	0.36	0.36	0.32	0.33	0.32	0.00	0.00	0.00	0.00
γ 49.0	1.05	0.47	0.33	0.32	0.28	0.29	0.28	0.27	0.00	0.00	0.00	0.00
γ 50.0	1.01	0.42	0.25	0.27	0.24	0.24	0.22	0.23	0.00	0.00	0.00	0.00
γ 51.0	0.94	0.35	0.24	0.19	0.19	0.18	0.18	0.16	0.00	0.00	0.00	0.00
γ 52.0	0.89	0.30	0.19	0.14	0.15	0.13	0.13	0.13	0.00	0.00	0.00	0.00
γ 53.0	0.82	0.27	0.13	0.10	0.11	0.07	0.07	0.08	0.00	0.00	0.00	0.00
γ 54.0	0.77	0.22	0.10	0.05	0.05	0.02	0.05	0.02	0.00	0.00	0.00	0.00
γ 55.0	0.71	0.16	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 56.0	0.68	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 57.0	0.62	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 58.0	0.58	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 59.0	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 60.0	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 61.0	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 62.0	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 63.0	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 64.0	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 65.0	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 66.0	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 67.0	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 68.0	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 69.0	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 70.0	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 71.0	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 72.0	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 73.0	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 74.0	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 75.0	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 81.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 82.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 83.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 84.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 86.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 87.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 88.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 89.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

-
-
-

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 141.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 147.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 171.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 173.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 174.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 175.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 176.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 177.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 178.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 179.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
V/H	C270.0	C292.5	C315.0	C337.5								
γ 0.0	254.96	254.96	254.96	254.96								
γ 1.0	251.05	251.74	252.07	253.48								
γ 2.0	245.16	246.02	246.97	249.37								
γ 3.0	236.75	238.37	239.11	242.59								
γ 4.0	226.55	227.96	229.42	233.60								
γ 5.0	213.98	215.64	218.35	223.25								

-
-
-

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 6. 0	199. 31	201. 56	205. 30	211. 23
γ 7. 0	183. 31	186. 19	190. 30	197. 31
γ 8. 0	166. 16	169. 41	173. 67	181. 75
γ 9. 0	148. 47	151. 52	156. 07	164. 97
γ 10. 0	130. 83	133. 70	138. 44	147. 37
γ 11. 0	114. 02	116. 72	121. 63	130. 34
γ 12. 0	99. 09	101. 52	106. 26	114. 56
γ 13. 0	86. 14	88. 10	92. 50	100. 24
γ 14. 0	74. 78	76. 48	80. 30	87. 36
γ 15. 0	64. 54	66. 19	69. 55	75. 67
γ 16. 0	55. 17	56. 68	59. 45	64. 82
γ 17. 0	46. 03	47. 39	49. 42	54. 09
γ 18. 0	37. 23	38. 31	39. 92	43. 76
γ 19. 0	29. 87	30. 60	32. 09	35. 38
γ 20. 0	23. 76	24. 47	25. 59	28. 43
γ 21. 0	18. 22	18. 86	19. 74	21. 97
γ 22. 0	13. 28	14. 01	14. 54	15. 92
γ 23. 0	9. 25	9. 80	10. 14	10. 99
γ 24. 0	6. 39	6. 64	6. 93	7. 45
γ 25. 0	4. 66	4. 83	4. 97	5. 28
γ 26. 0	3. 58	3. 76	3. 77	3. 99
γ 27. 0	2. 85	2. 98	2. 90	3. 06
γ 28. 0	2. 24	2. 35	2. 24	2. 40
γ 29. 0	1. 80	1. 86	1. 74	1. 84
γ 30. 0	1. 43	1. 51	1. 35	1. 45
γ 31. 0	1. 13	1. 21	1. 07	1. 21
γ 32. 0	0. 93	0. 99	0. 90	0. 99
γ 33. 0	0. 76	0. 82	0. 77	0. 89
γ 34. 0	0. 58	0. 67	0. 65	0. 78
γ 35. 0	0. 37	0. 46	0. 48	0. 63
γ 36. 0	0. 13	0. 15	0. 20	0. 27
γ 37. 0	0. 00	0. 00	0. 00	0. 00
γ 38. 0	0. 00	0. 00	0. 00	0. 00
γ 39. 0	0. 00	0. 00	0. 00	0. 00
γ 40. 0	0. 00	0. 00	0. 00	0. 00
γ 41. 0	0. 00	0. 00	0. 00	0. 00
γ 42. 0	0. 00	0. 00	0. 00	0. 00
γ 43. 0	0. 00	0. 00	0. 00	0. 00
γ 44. 0	0. 00	0. 00	0. 00	0. 00
γ 45. 0	0. 00	0. 00	0. 00	0. 00
γ 46. 0	0. 00	0. 00	0. 00	0. 00
γ 47. 0	0. 00	0. 00	0. 00	0. 00
γ 48. 0	0. 00	0. 00	0. 00	0. 00
γ 49. 0	0. 00	0. 00	0. 00	0. 00
γ 50. 0	0. 00	0. 00	0. 00	0. 00
γ 51. 0	0. 00	0. 00	0. 00	0. 00
γ 52. 0	0. 00	0. 00	0. 00	0. 00

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 53. 0	0. 00	0. 00	0. 00	0. 00
γ 54. 0	0. 00	0. 00	0. 00	0. 00
γ 55. 0	0. 00	0. 00	0. 00	0. 00
γ 56. 0	0. 00	0. 00	0. 00	0. 00
γ 57. 0	0. 00	0. 00	0. 00	0. 00
γ 58. 0	0. 00	0. 00	0. 00	0. 00
γ 59. 0	0. 00	0. 00	0. 00	0. 00
γ 60. 0	0. 00	0. 00	0. 00	0. 00
γ 61. 0	0. 00	0. 00	0. 00	0. 00
γ 62. 0	0. 00	0. 00	0. 00	0. 00
γ 63. 0	0. 00	0. 00	0. 00	0. 00
γ 64. 0	0. 00	0. 00	0. 00	0. 00
γ 65. 0	0. 00	0. 00	0. 00	0. 00
γ 66. 0	0. 00	0. 00	0. 00	0. 00
γ 67. 0	0. 00	0. 00	0. 00	0. 00
γ 68. 0	0. 00	0. 00	0. 00	0. 00
γ 69. 0	0. 00	0. 00	0. 00	0. 00
γ 70. 0	0. 00	0. 00	0. 00	0. 00
γ 71. 0	0. 00	0. 00	0. 00	0. 00
γ 72. 0	0. 00	0. 00	0. 00	0. 00
γ 73. 0	0. 00	0. 00	0. 00	0. 00
γ 74. 0	0. 00	0. 00	0. 00	0. 00
γ 75. 0	0. 00	0. 00	0. 00	0. 00
γ 76. 0	0. 00	0. 00	0. 00	0. 00
γ 77. 0	0. 00	0. 00	0. 00	0. 00
γ 78. 0	0. 00	0. 00	0. 00	0. 00
γ 79. 0	0. 00	0. 00	0. 00	0. 00
γ 80. 0	0. 00	0. 00	0. 00	0. 00
γ 81. 0	0. 00	0. 00	0. 00	0. 00
γ 82. 0	0. 00	0. 00	0. 00	0. 00
γ 83. 0	0. 00	0. 00	0. 00	0. 00
γ 84. 0	0. 00	0. 00	0. 00	0. 00
γ 85. 0	0. 00	0. 00	0. 00	0. 00
γ 86. 0	0. 00	0. 00	0. 00	0. 00
γ 87. 0	0. 00	0. 00	0. 00	0. 00
γ 88. 0	0. 00	0. 00	0. 00	0. 00
γ 89. 0	0. 00	0. 00	0. 00	0. 00
γ 90. 0	0. 00	0. 00	0. 00	0. 00
γ 91. 0	0. 00	0. 00	0. 00	0. 00
γ 92. 0	0. 00	0. 00	0. 00	0. 00
γ 93. 0	0. 00	0. 00	0. 00	0. 00
γ 94. 0	0. 00	0. 00	0. 00	0. 00
γ 95. 0	0. 00	0. 00	0. 00	0. 00
γ 96. 0	0. 00	0. 00	0. 00	0. 00
γ 97. 0	0. 00	0. 00	0. 00	0. 00
γ 98. 0	0. 00	0. 00	0. 00	0. 00
γ 99. 0	0. 00	0. 00	0. 00	0. 00

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.00	0.00
γ 140.0	0.00	0.00	0.00	0.00
γ 141.0	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD21230-2W-B3535-3090-LDK-15D-KED-500mA.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 147. 0	0. 00	0. 00	0. 00	0. 00
γ 148. 0	0. 00	0. 00	0. 00	0. 00
γ 149. 0	0. 00	0. 00	0. 00	0. 00
γ 150. 0	0. 00	0. 00	0. 00	0. 00
γ 151. 0	0. 00	0. 00	0. 00	0. 00
γ 152. 0	0. 00	0. 00	0. 00	0. 00
γ 153. 0	0. 00	0. 00	0. 00	0. 00
γ 154. 0	0. 00	0. 00	0. 00	0. 00
γ 155. 0	0. 00	0. 00	0. 00	0. 00
γ 156. 0	0. 00	0. 00	0. 00	0. 00
γ 157. 0	0. 00	0. 00	0. 00	0. 00
γ 158. 0	0. 00	0. 00	0. 00	0. 00
γ 159. 0	0. 00	0. 00	0. 00	0. 00
γ 160. 0	0. 00	0. 00	0. 00	0. 00
γ 161. 0	0. 00	0. 00	0. 00	0. 00
γ 162. 0	0. 00	0. 00	0. 00	0. 00
γ 163. 0	0. 00	0. 00	0. 00	0. 00
γ 164. 0	0. 00	0. 00	0. 00	0. 00
γ 165. 0	0. 00	0. 00	0. 00	0. 00
γ 166. 0	0. 00	0. 00	0. 00	0. 00
γ 167. 0	0. 00	0. 00	0. 00	0. 00
γ 168. 0	0. 00	0. 00	0. 00	0. 00
γ 169. 0	0. 00	0. 00	0. 00	0. 00
γ 170. 0	0. 00	0. 00	0. 00	0. 00
γ 171. 0	0. 00	0. 00	0. 00	0. 00
γ 172. 0	0. 00	0. 00	0. 00	0. 00
γ 173. 0	0. 00	0. 00	0. 00	0. 00
γ 174. 0	0. 00	0. 00	0. 00	0. 00
γ 175. 0	0. 00	0. 00	0. 00	0. 00
γ 176. 0	0. 00	0. 00	0. 00	0. 00
γ 177. 0	0. 00	0. 00	0. 00	0. 00
γ 178. 0	0. 00	0. 00	0. 00	0. 00
γ 179. 0	0. 00	0. 00	0. 00	0. 00
γ 180. 0	0. 00	0. 00	0. 00	0. 00