

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES



Indoor Luminaire Photometric Data

Description Information

Luminaire Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Date: 2024/01/22
Manufacture:	Shld. Ang(°):15	Test Machine:GON-2000
Test Lab: Test	Frequency(Hz):50	Lamp CCT(K): 3000 Ra: 90
Lum. Size(W*L*H):0.034m*0.034m*0.000m	Lum. Area(m2):0.001	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=22.5 γ=1.0	Temp.(°C): 25
		Humidity(%): 50.0

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 110.510	Luminaire Flux(lm): 110.508	Field Angle(10%Imax): 38.4(°)	
Rated Power(W): 8	Luminaire Efficiency: 100.00%	Down Lumens&Percent: 110.381lm 99.89%	
Rated Voltage(V): 220	Luminaire EER(lm/W): 13.930	Up Lumens&Percent: 0.127lm 0.11%	
Tested Power(W): 7.933	Max. Candela(cd): 917.475	S/MH: C0_a180=0.226 C90_270=0.229	
Lamps' Inside: 1	Max Cand@Ang.(°): C=315.0 γ=2.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf):219.8, 0.065, 0.548	Beam Angle(50%Imax): 13.3(°)	ErP Φuse(90°): 109.359lm	
Lamp Size(W*L*H):0.034m*0.034m*0.000m	Left=-6.3°, Right=7.0°	IRF(%): 1784.488	

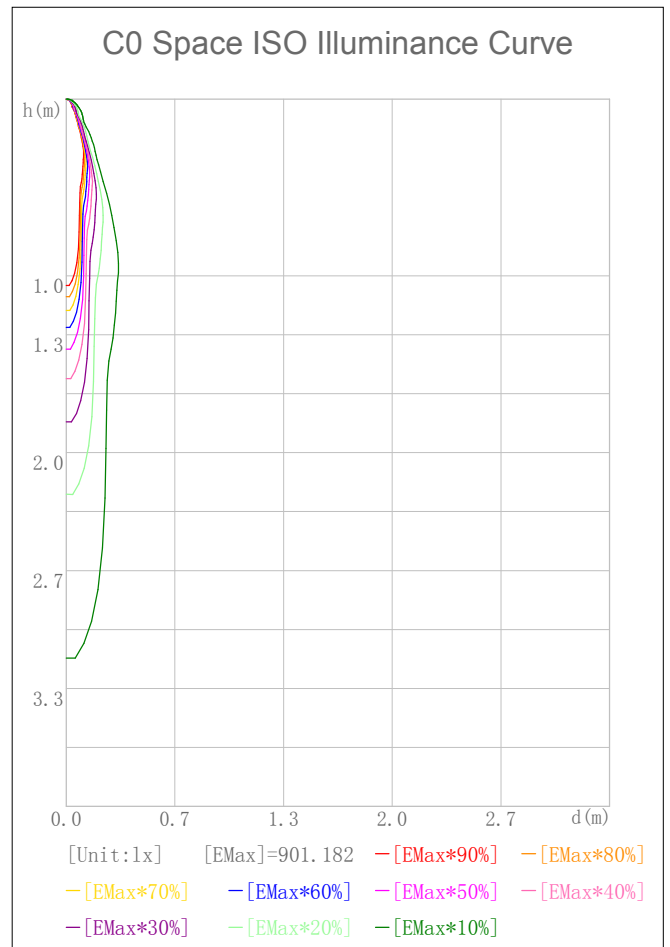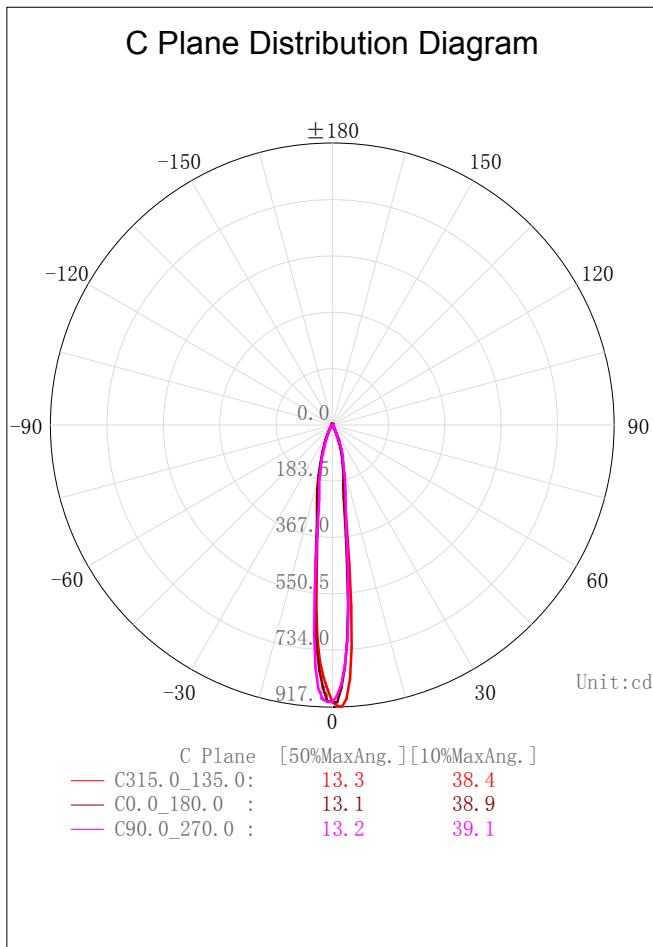



IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

2D Plane Light Intensity Distribution Curve

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/22

C Plane Distribution Diagram

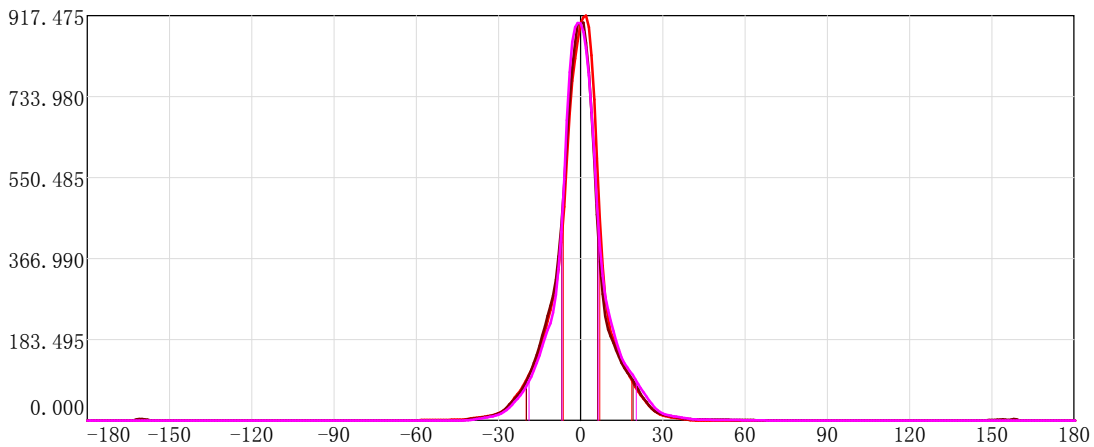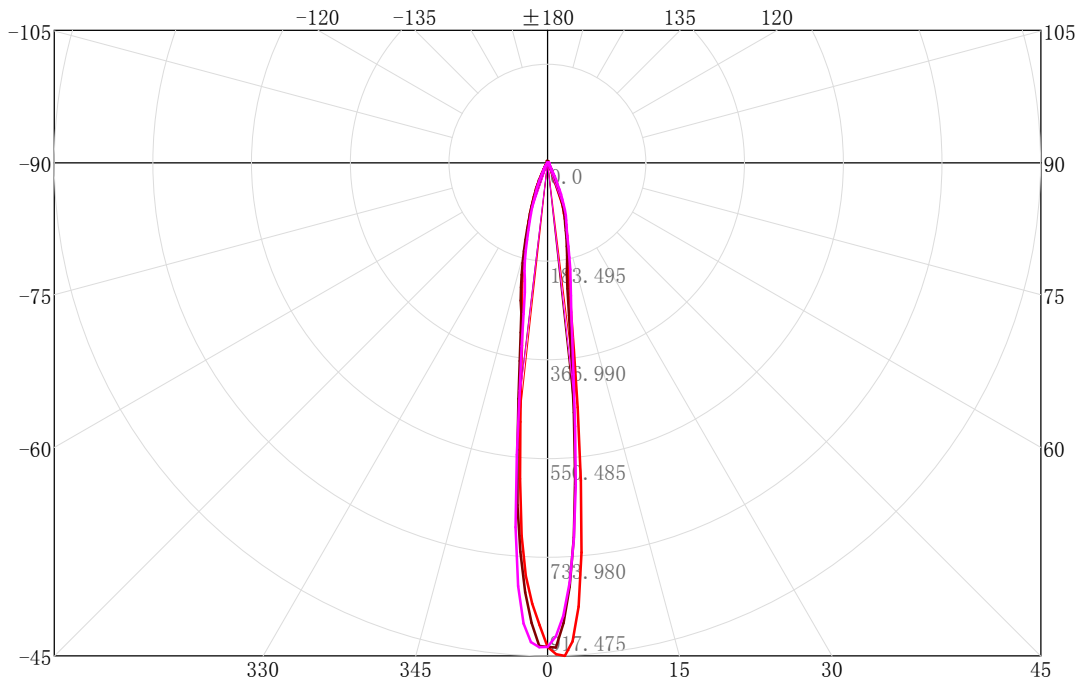

	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
—	C315.0_135.0:	13.3	38.4	
—	C0.0_180.0 :	13.1	38.9	
—	C90.0_270.0 :	13.2	39.1	


IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

3D Light Intensity Distribution Modal

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/22

3D Light Intensity Distribution Modal

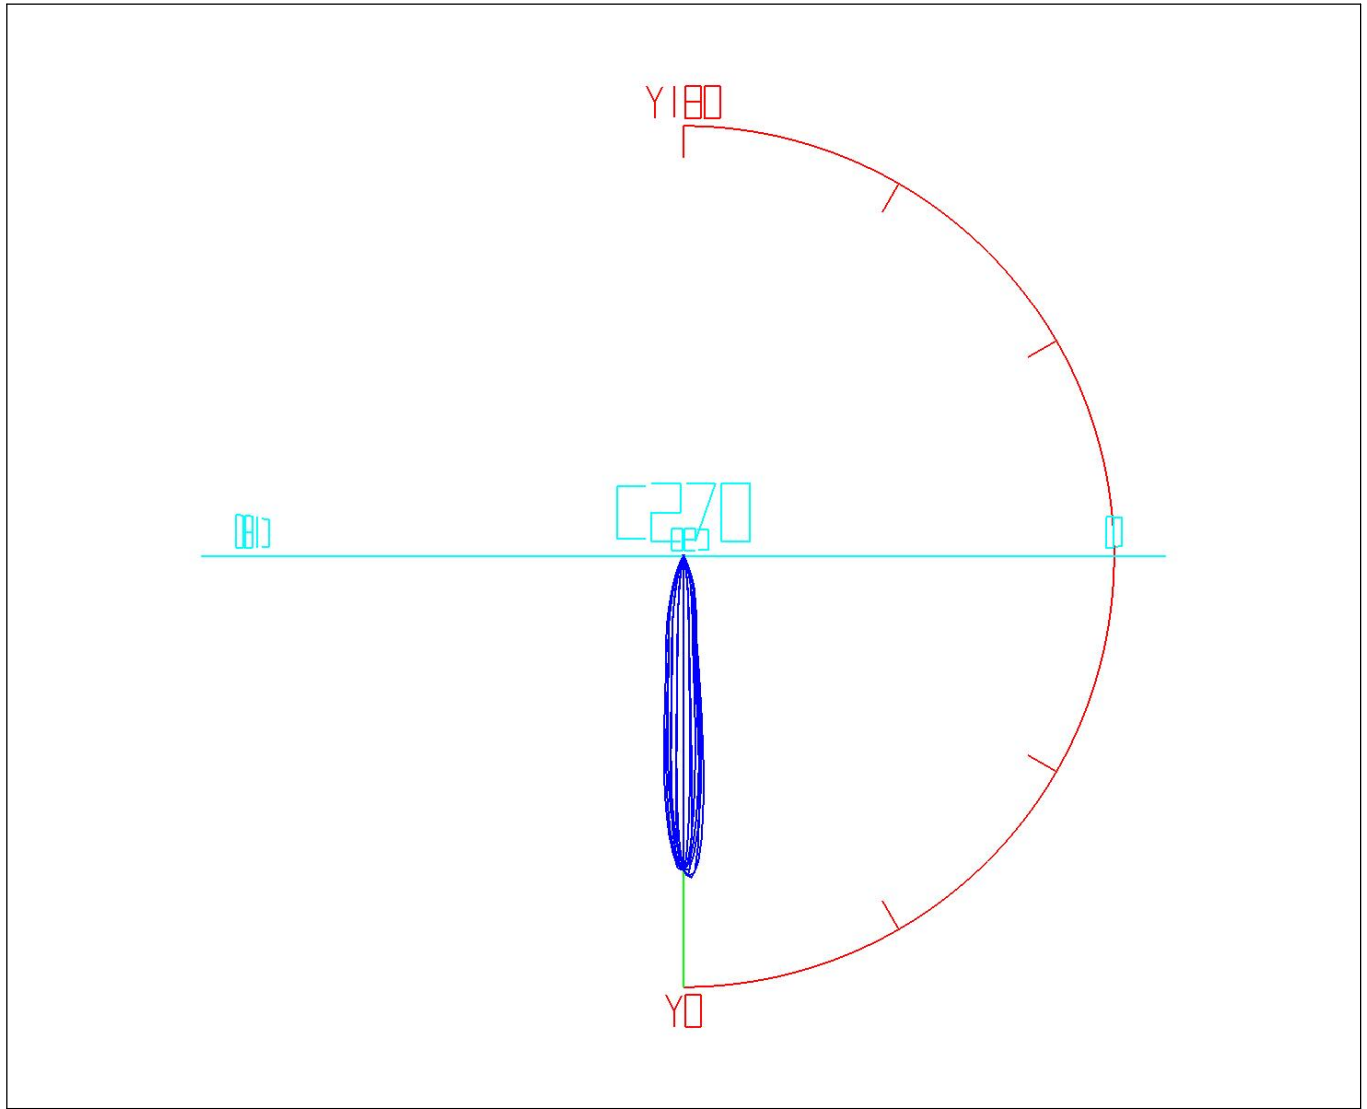

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.86	0.86	0.78	0.78	47.0-48.0	0.08	109.23	0.07	98.84
1.0-2.0	2.51	3.37	2.27	3.05	48.0-49.0	0.08	109.31	0.07	98.91
2.0-3.0	3.98	7.34	3.60	6.65	49.0-50.0	0.07	109.38	0.07	98.98
3.0-4.0	5.12	12.47	4.64	11.28	50.0-51.0	0.07	109.45	0.06	99.04
4.0-5.0	5.81	18.28	5.26	16.54	51.0-52.0	0.07	109.52	0.06	99.11
5.0-6.0	5.94	24.22	5.38	21.92	52.0-53.0	0.07	109.59	0.06	99.17
6.0-7.0	5.66	29.88	5.12	27.04	53.0-54.0	0.06	109.65	0.06	99.22
7.0-8.0	5.25	35.13	4.75	31.79	54.0-55.0	0.06	109.72	0.06	99.28
8.0-9.0	4.92	40.05	4.46	36.24	55.0-56.0	0.06	109.77	0.05	99.33
9.0-10.0	4.72	44.77	4.27	40.52	56.0-57.0	0.06	109.83	0.05	99.39
10.0-11.0	4.64	49.42	4.20	44.72	57.0-58.0	0.05	109.89	0.05	99.43
11.0-12.0	4.62	54.03	4.18	48.89	58.0-59.0	0.05	109.93	0.04	99.48
12.0-13.0	4.56	58.59	4.13	53.02	59.0-60.0	0.05	109.98	0.04	99.52
13.0-14.0	4.43	63.02	4.01	57.03	60.0-61.0	0.04	110.02	0.04	99.56
14.0-15.0	4.25	67.27	3.84	60.87	61.0-62.0	0.04	110.06	0.03	99.59
15.0-16.0	4.03	71.30	3.65	64.52	62.0-63.0	0.04	110.09	0.03	99.62
16.0-17.0	3.83	75.13	3.46	67.98	63.0-64.0	0.03	110.13	0.03	99.65
17.0-18.0	3.63	78.76	3.28	71.27	64.0-65.0	0.03	110.16	0.03	99.68
18.0-19.0	3.43	82.19	3.10	74.37	65.0-66.0	0.03	110.18	0.02	99.71
19.0-20.0	3.20	85.39	2.90	77.27	66.0-67.0	0.03	110.21	0.02	99.73
20.0-21.0	2.95	88.34	2.67	79.94	67.0-68.0	0.02	110.23	0.02	99.75
21.0-22.0	2.70	91.04	2.44	82.38	68.0-69.0	0.02	110.25	0.02	99.77
22.0-23.0	2.45	93.49	2.21	84.59	69.0-70.0	0.02	110.27	0.02	99.78
23.0-24.0	2.19	95.68	1.98	86.58	70.0-71.0	0.02	110.29	0.01	99.80
24.0-25.0	1.93	97.61	1.75	88.33	71.0-72.0	0.01	110.30	0.01	99.81
25.0-26.0	1.66	99.27	1.50	89.83	72.0-73.0	0.01	110.31	0.01	99.82
26.0-27.0	1.39	100.66	1.26	91.09	73.0-74.0	0.01	110.33	0.01	99.83
27.0-28.0	1.16	101.82	1.05	92.14	74.0-75.0	0.01	110.33	0.01	99.84
28.0-29.0	0.98	102.80	0.88	93.02	75.0-76.0	0.01	110.34	0.01	99.85
29.0-30.0	0.85	103.64	0.77	93.79	76.0-77.0	0.01	110.35	0.01	99.85
30.0-31.0	0.75	104.39	0.68	94.46	77.0-78.0	0.01	110.35	0.00	99.86
31.0-32.0	0.67	105.06	0.61	95.07	78.0-79.0	0.01	110.36	0.01	99.86
32.0-33.0	0.60	105.67	0.55	95.62	79.0-80.0	0.01	110.36	0.00	99.87
33.0-34.0	0.55	106.21	0.50	96.11	80.0-81.0	0.00	110.37	0.00	99.87
34.0-35.0	0.49	106.71	0.45	96.56	81.0-82.0	0.00	110.37	0.00	99.87
35.0-36.0	0.44	107.15	0.40	96.96	82.0-83.0	0.00	110.37	0.00	99.87
36.0-37.0	0.39	107.54	0.35	97.31	83.0-84.0	0.00	110.37	0.00	99.88
37.0-38.0	0.34	107.88	0.31	97.62	84.0-85.0	0.00	110.38	0.00	99.88
38.0-39.0	0.28	108.16	0.26	97.88	85.0-86.0	0.00	110.38	0.00	99.88
39.0-40.0	0.23	108.39	0.21	98.08	86.0-87.0	0.00	110.38	0.00	99.88
40.0-41.0	0.18	108.57	0.16	98.24	87.0-88.0	0.00	110.38	0.00	99.88
41.0-42.0	0.14	108.70	0.12	98.37	88.0-89.0	0.00	110.38	0.00	99.88
42.0-43.0	0.11	108.81	0.10	98.46	89.0-90.0	0.00	110.38	0.00	99.88
43.0-44.0	0.09	108.91	0.08	98.55	90.0-91.0	0.00	110.38	0.00	99.88
44.0-45.0	0.09	108.99	0.08	98.63	91.0-92.0	0.00	110.38	0.00	99.88
45.0-46.0	0.08	109.07	0.07	98.70	92.0-93.0	0.00	110.38	0.00	99.88
46.0-47.0	0.08	109.15	0.07	98.77	93.0-94.0	0.00	110.38	0.00	99.88

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	110.38	0.00	99.88	141.0-142.0	0.00	110.38	0.00	99.89
95.0-96.0	0.00	110.38	0.00	99.88	142.0-143.0	0.00	110.39	0.00	99.89
96.0-97.0	0.00	110.38	0.00	99.88	143.0-144.0	0.00	110.39	0.00	99.89
97.0-98.0	0.00	110.38	0.00	99.88	144.0-145.0	0.00	110.39	0.00	99.89
98.0-99.0	0.00	110.38	0.00	99.88	145.0-146.0	0.00	110.39	0.00	99.89
99.0-100.0	0.00	110.38	0.00	99.88	146.0-147.0	0.00	110.39	0.00	99.89
100.0-101.0	0.00	110.38	0.00	99.88	147.0-148.0	0.00	110.40	0.00	99.90
101.0-102.0	0.00	110.38	0.00	99.88	148.0-149.0	0.00	110.40	0.00	99.90
102.0-103.0	0.00	110.38	0.00	99.88	149.0-150.0	0.00	110.40	0.00	99.90
103.0-104.0	0.00	110.38	0.00	99.88	150.0-151.0	0.00	110.41	0.00	99.91
104.0-105.0	0.00	110.38	0.00	99.88	151.0-152.0	0.01	110.42	0.01	99.91
105.0-106.0	0.00	110.38	0.00	99.88	152.0-153.0	0.01	110.42	0.01	99.92
106.0-107.0	0.00	110.38	0.00	99.88	153.0-154.0	0.01	110.43	0.01	99.93
107.0-108.0	0.00	110.38	0.00	99.88	154.0-155.0	0.01	110.44	0.01	99.94
108.0-109.0	0.00	110.38	0.00	99.88	155.0-156.0	0.00	110.44	0.00	99.94
109.0-110.0	0.00	110.38	0.00	99.88	156.0-157.0	0.01	110.45	0.00	99.94
110.0-111.0	0.00	110.38	0.00	99.88	157.0-158.0	0.01	110.46	0.01	99.95
111.0-112.0	0.00	110.38	0.00	99.88	158.0-159.0	0.01	110.47	0.01	99.97
112.0-113.0	0.00	110.38	0.00	99.88	159.0-160.0	0.01	110.49	0.01	99.98
113.0-114.0	0.00	110.38	0.00	99.88	160.0-161.0	0.01	110.50	0.01	99.99
114.0-115.0	0.00	110.38	0.00	99.88	161.0-162.0	0.01	110.50	0.01	99.99
115.0-116.0	0.00	110.38	0.00	99.88	162.0-163.0	0.00	110.51	0.00	100.00
116.0-117.0	0.00	110.38	0.00	99.88	163.0-164.0	0.00	110.51	0.00	100.00
117.0-118.0	0.00	110.38	0.00	99.88	164.0-165.0	0.00	110.51	0.00	100.00
118.0-119.0	0.00	110.38	0.00	99.88	165.0-166.0	0.00	110.51	0.00	100.00
119.0-120.0	0.00	110.38	0.00	99.88	166.0-167.0	0.00	110.51	0.00	100.00
120.0-121.0	0.00	110.38	0.00	99.88	167.0-168.0	0.00	110.51	0.00	100.00
121.0-122.0	0.00	110.38	0.00	99.88	168.0-169.0	0.00	110.51	0.00	100.00
122.0-123.0	0.00	110.38	0.00	99.88	169.0-170.0	0.00	110.51	0.00	100.00
123.0-124.0	0.00	110.38	0.00	99.88	170.0-171.0	0.00	110.51	0.00	100.00
124.0-125.0	0.00	110.38	0.00	99.88	171.0-172.0	0.00	110.51	0.00	100.00
125.0-126.0	0.00	110.38	0.00	99.88	172.0-173.0	0.00	110.51	0.00	100.00
126.0-127.0	0.00	110.38	0.00	99.88	173.0-174.0	0.00	110.51	0.00	100.00
127.0-128.0	0.00	110.38	0.00	99.88	174.0-175.0	0.00	110.51	0.00	100.00
128.0-129.0	0.00	110.38	0.00	99.88	175.0-176.0	0.00	110.51	0.00	100.00
129.0-130.0	0.00	110.38	0.00	99.88	176.0-177.0	0.00	110.51	0.00	100.00
130.0-131.0	0.00	110.38	0.00	99.88	177.0-178.0	0.00	110.51	0.00	100.00
131.0-132.0	0.00	110.38	0.00	99.88	178.0-179.0	0.00	110.51	0.00	100.00
132.0-133.0	0.00	110.38	0.00	99.88	179.0-180.0	0.00	110.51	0.00	100.00
133.0-134.0	0.00	110.38	0.00	99.88					
134.0-135.0	0.00	110.38	0.00	99.88					
135.0-136.0	0.00	110.38	0.00	99.88					
136.0-137.0	0.00	110.38	0.00	99.88					
137.0-138.0	0.00	110.38	0.00	99.89					
138.0-139.0	0.00	110.38	0.00	99.89					
139.0-140.0	0.00	110.38	0.00	99.89					
140.0-141.0	0.00	110.38	0.00	99.89					

-
-
-


IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Rectangle ISO Lighting Intensity Diagram

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/22

ISO Lighting Intensity Curve

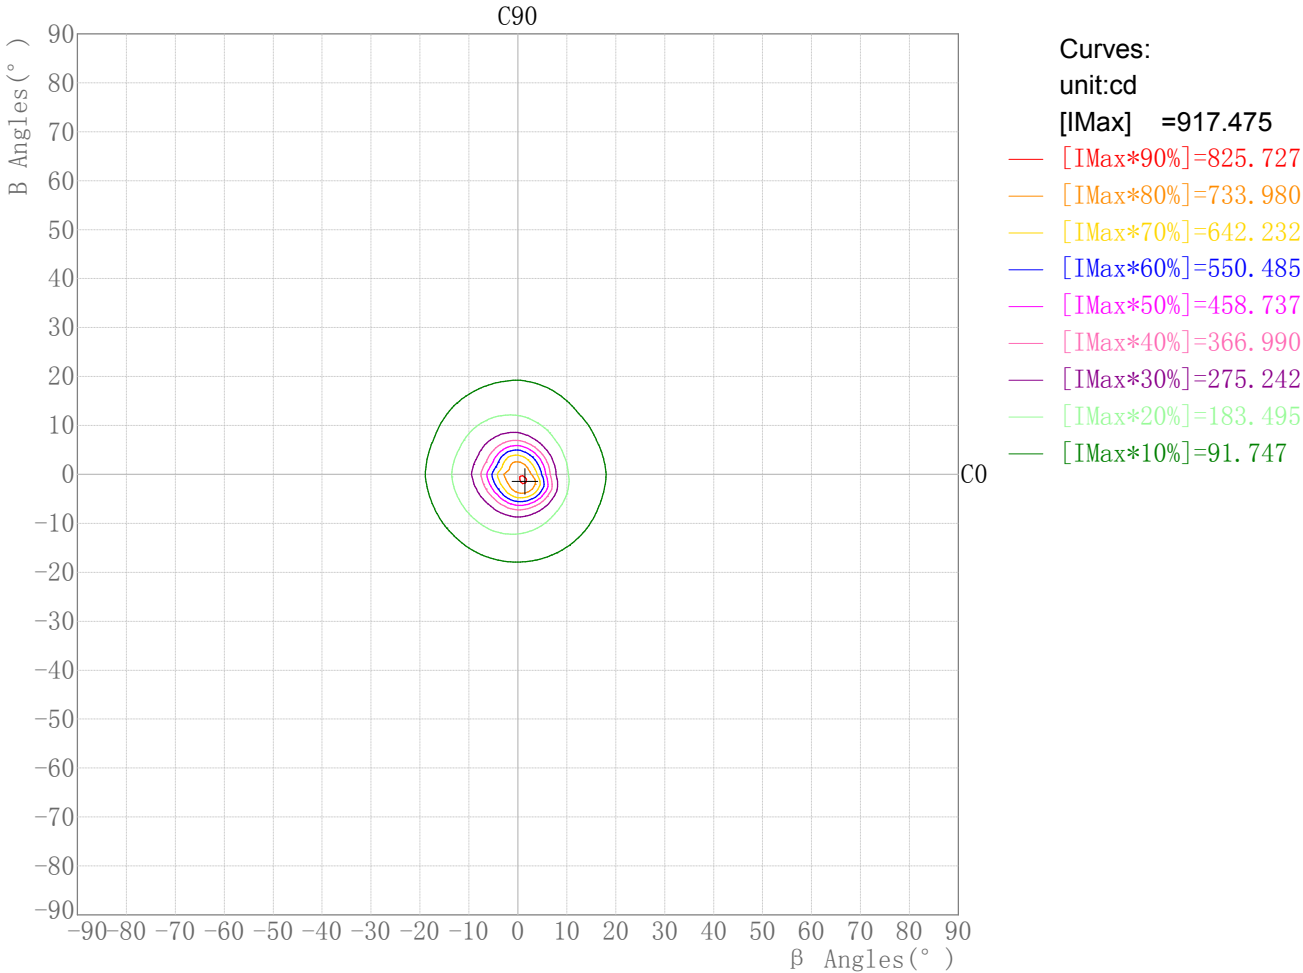


Maximum Light Intensity(cd): 917.47
Maximum Cand.@Angle: H=1.4°,V=-1.4°

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Round ISO Lighting Intensity Diagram

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/22

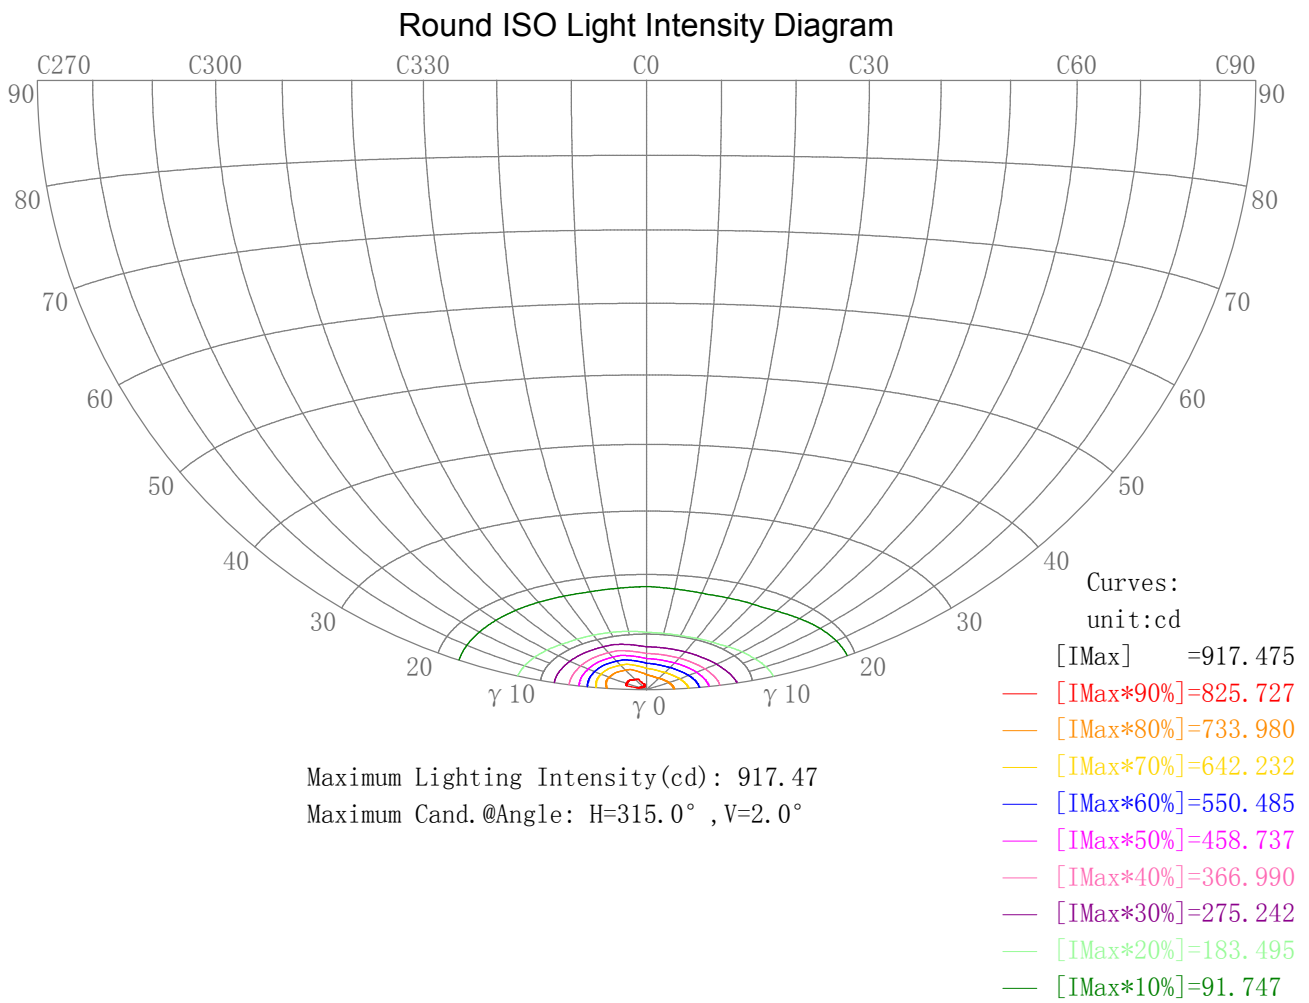


IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Plane ISO-Illuminance Diagram

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/22

Plane ISO-Illuminance Curve

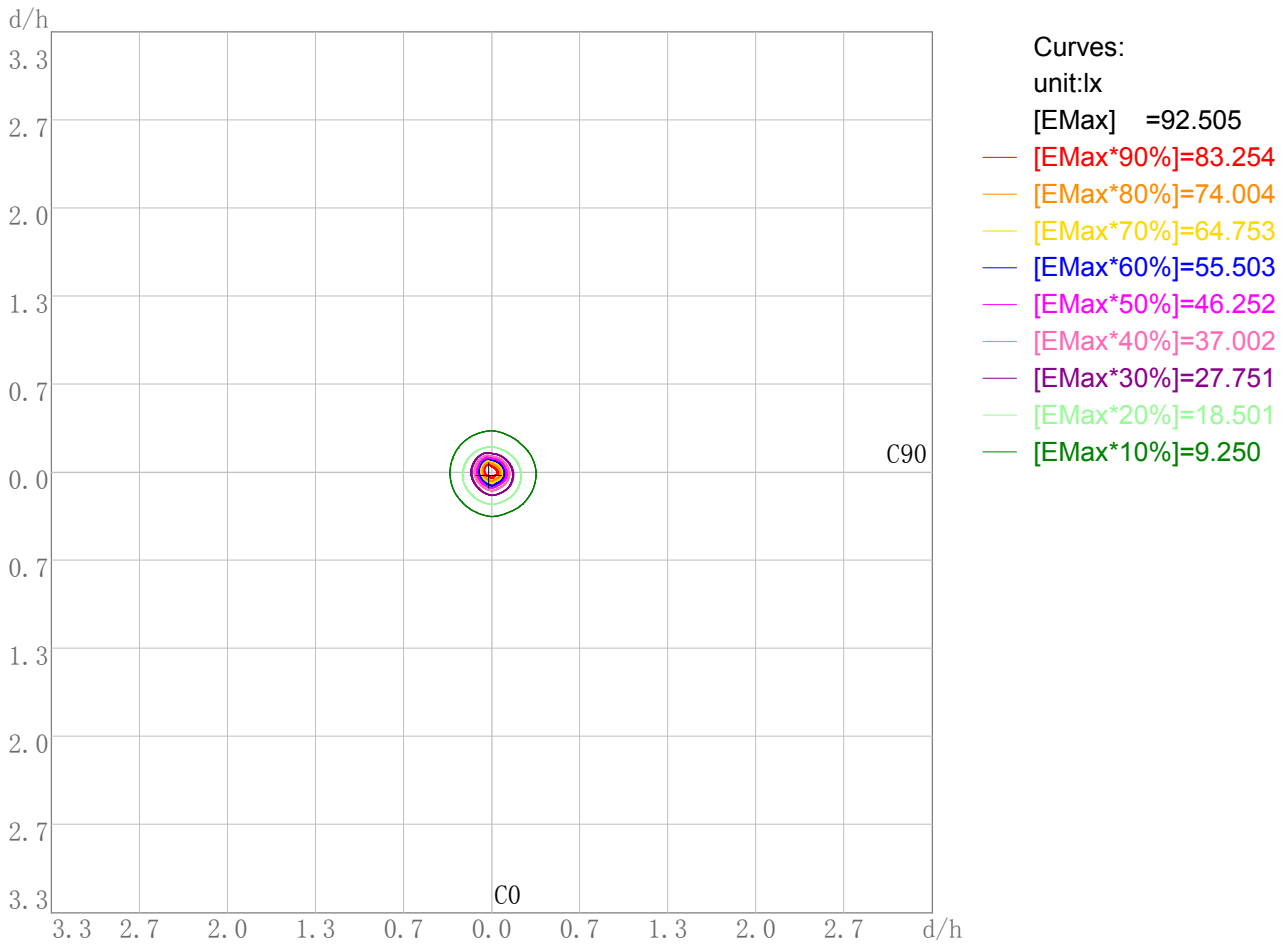

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 92.50

Working Plane Maximum Illuminance Position(d/h):H-0.0 V0.0


IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

3D Plane ISO Illuminance Diagram

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/22

3D Plane Illuminance Modal

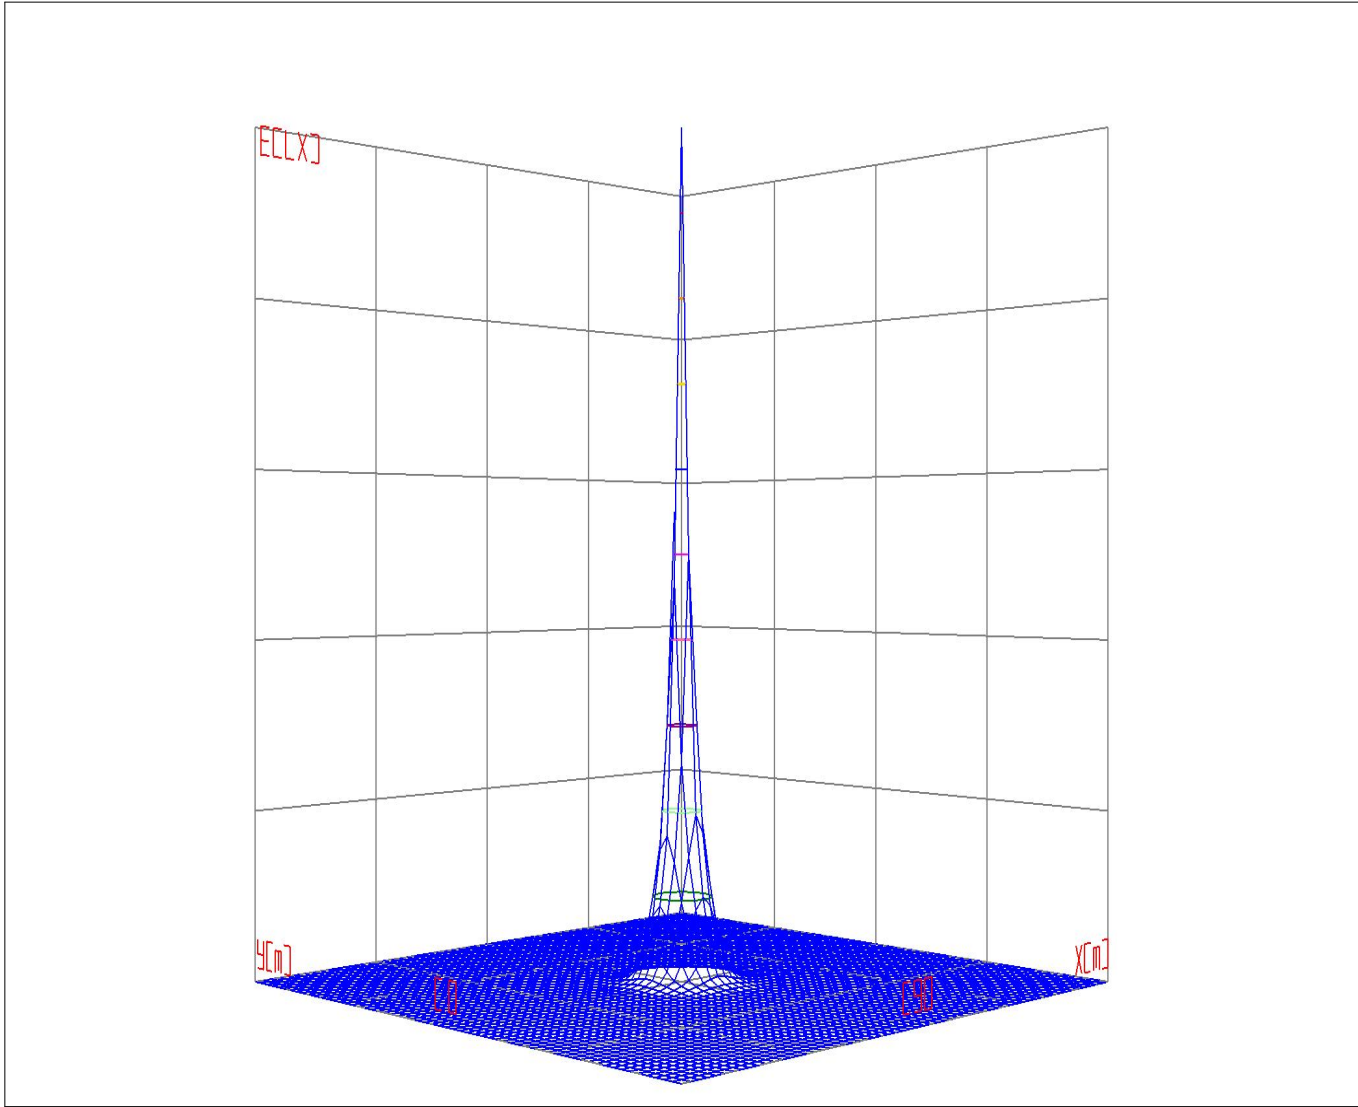

Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0


IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Space ISO Illuminance Diagram

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/22

Space ISO Illuminance Curve

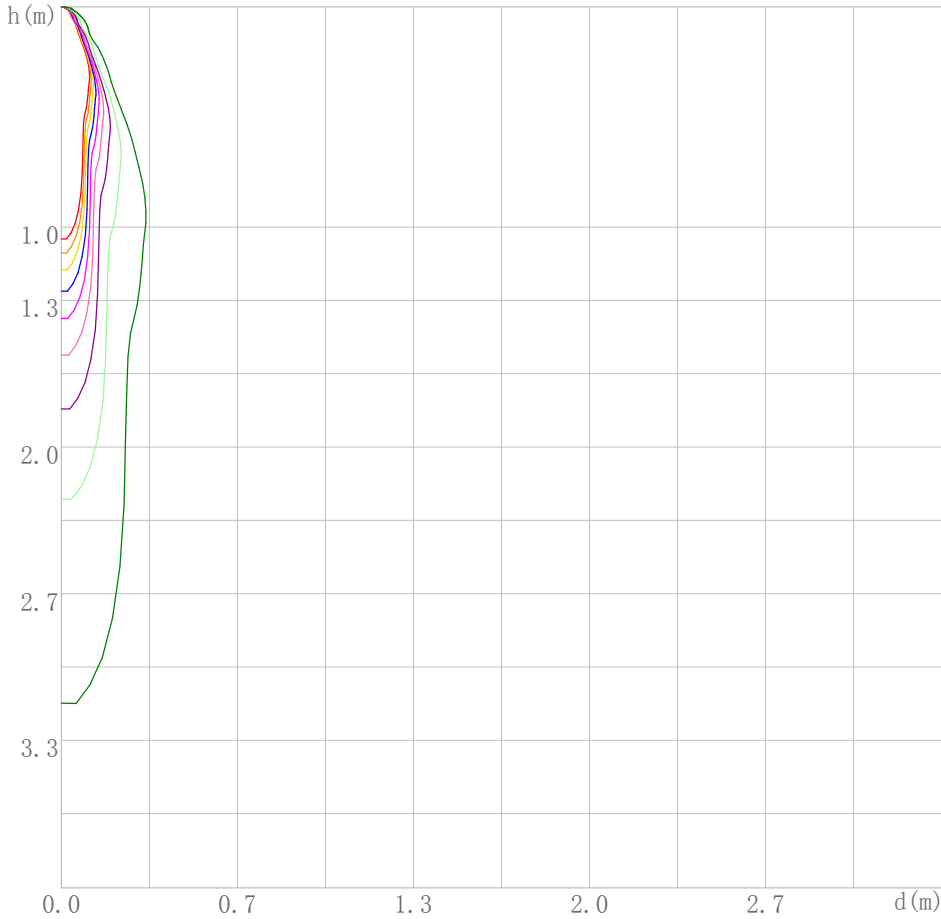

- Curves:
[Unit: lx]
[EMax] =901.182
- [EMax*90%]=811.064
 - [EMax*80%]=720.946
 - [EMax*70%]=630.828
 - [EMax*60%]=540.709
 - [EMax*50%]=450.591
 - [EMax*40%]=360.473
 - [EMax*30%]=270.355
 - [EMax*20%]=180.236
 - [EMax*10%]=90.118

Space Plane Maximum Illuminance and @Angle:901.18lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:901.594cd,0deg


IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Illuminance-Distance Diagram

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/22

Illuminance-Distance Curve

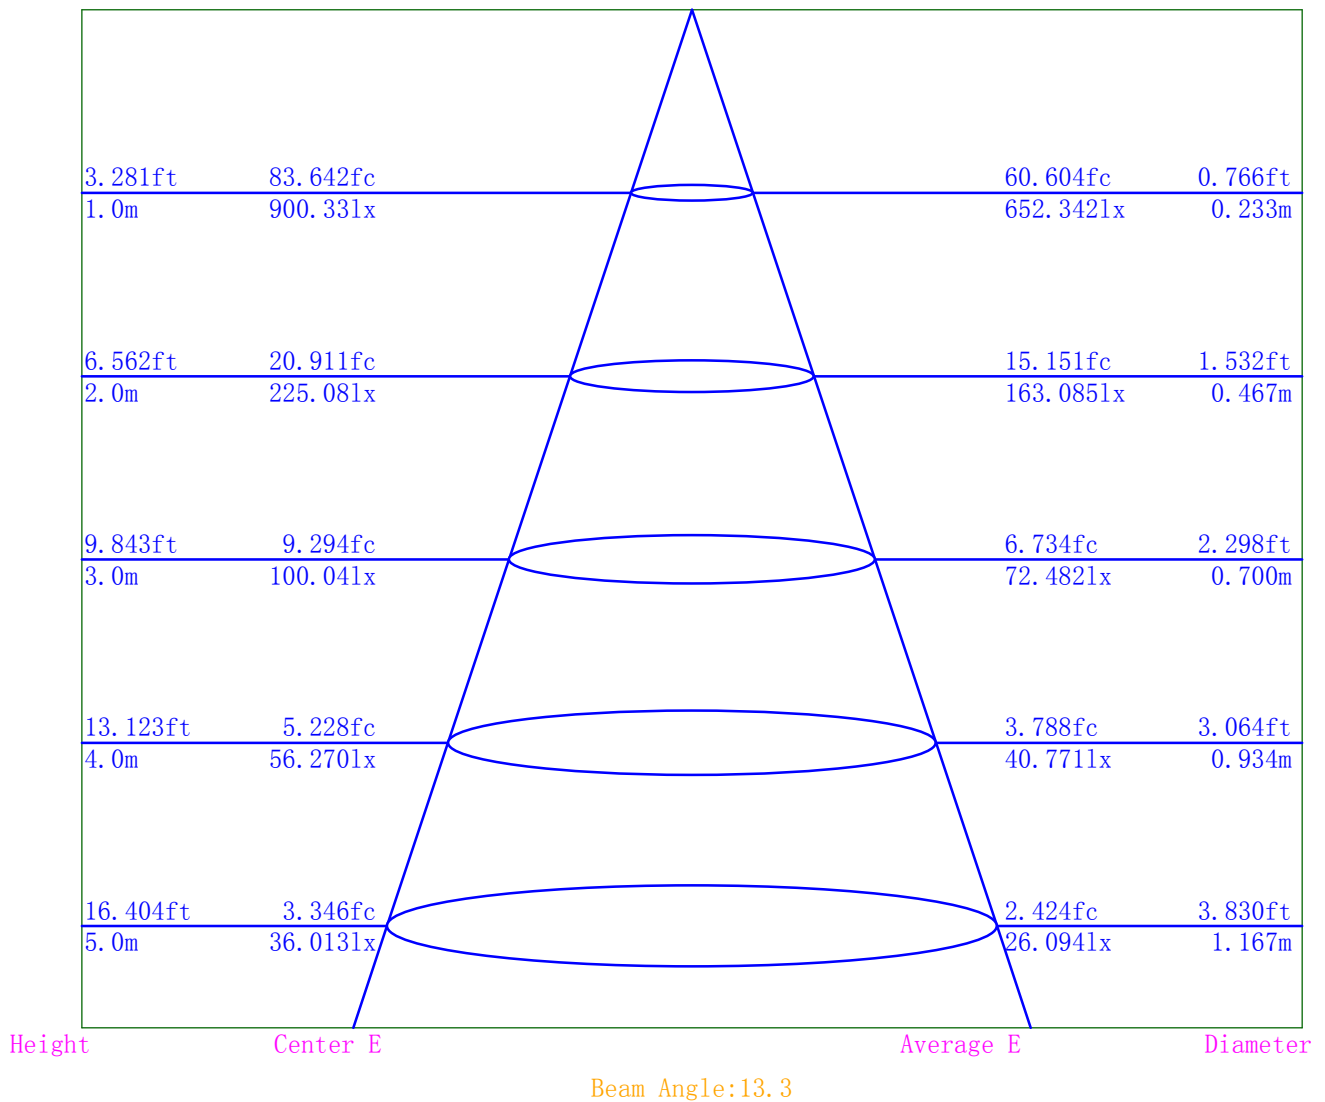

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Indoor Luminance Limiting Curves

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/22


Glare Grade Table

GI	Quality	Using Illuminance							
		a	b	c	d	e	f	g	h
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	4121	3730	3430	2804	2583	2427	2242	4389	3628
C90	3163	2873	2486	1907	1270	680	234	0	0

Luminance Limiting Curve

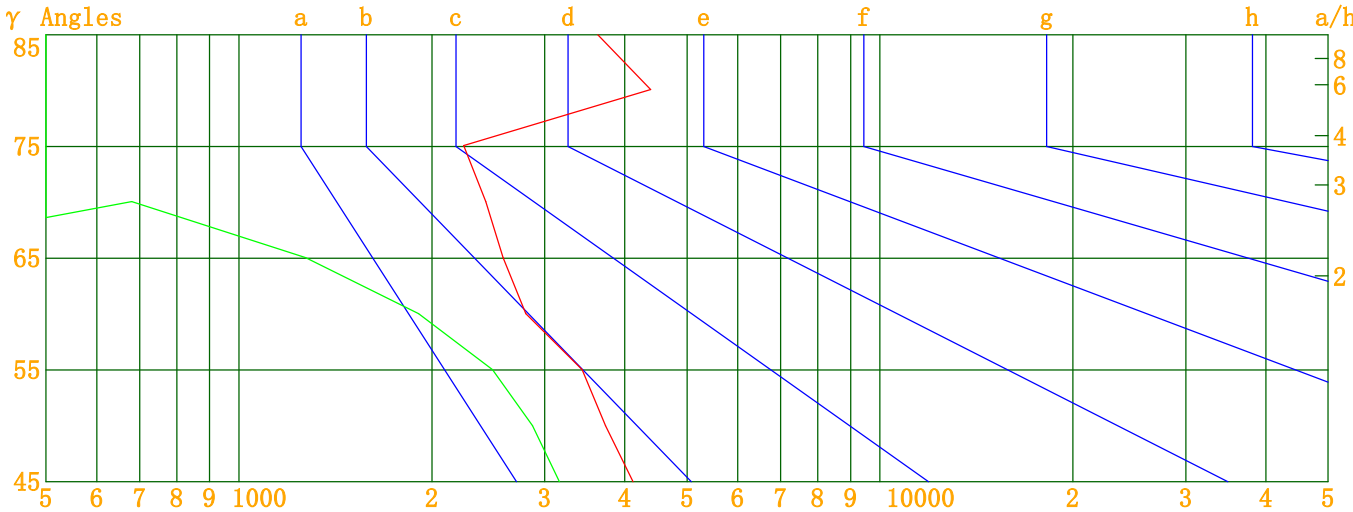


Luminous Size: Length(m)=-0.034 Width(m)=-0.034 Height(m)=0.000 Area(m^2)=0.000908
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Indoor Budgetary Estimate Table

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/22

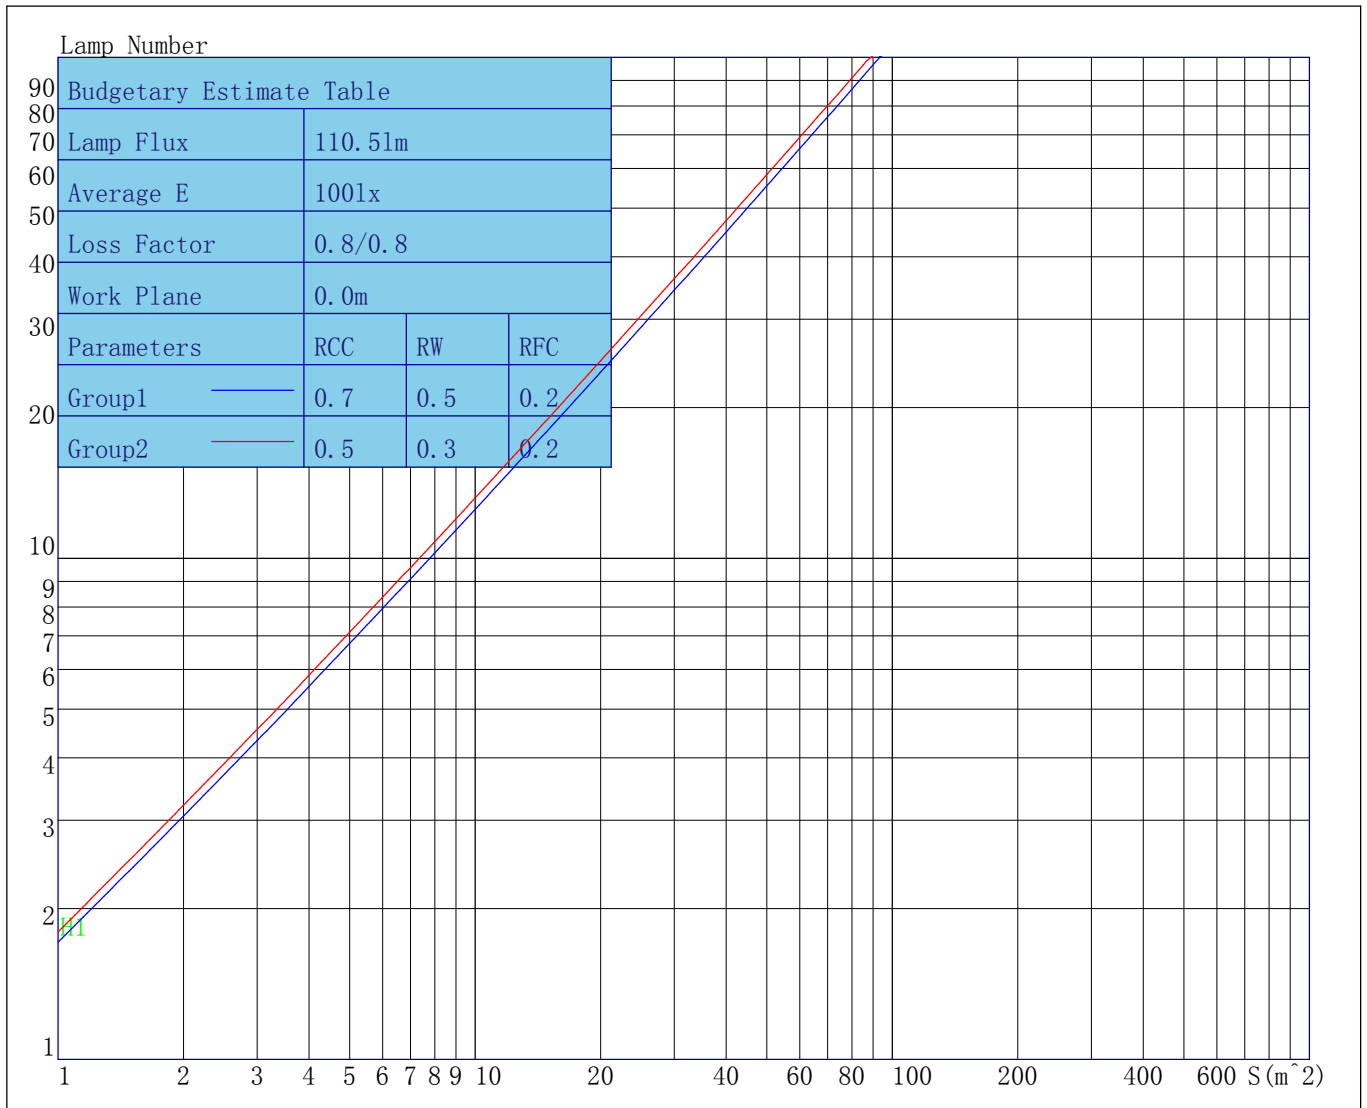

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
 Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
 Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Indoor Coefficient of Utilization Table

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/22

Coefficients of Utilization - Zonal Cavity Method																					
Coef.	Effective Floor Cavity Reflectance RFC=0.20																				
RhoCC (%)	80				70				50				30				10				0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	109	113	111	109	108	107	105	104	103	102	101	100	99	98	97			
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93			
3	108	103	100	97	106	102	99	96	99	97	94	97	95	93	95	93	92	90			
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	87			
5	101	96	91	88	100	95	91	88	93	90	87	92	89	87	90	88	86	85			
6	99	92	88	85	97	92	88	85	90	87	84	89	86	84	88	85	83	82			
7	96	90	85	83	95	89	85	82	88	84	82	87	84	82	86	83	81	80			
8	93	87	83	80	92	86	83	80	85	82	80	85	82	79	84	81	79	78			
9	91	84	80	78	90	84	80	78	83	80	77	83	79	77	82	79	77	76			
10	89	82	78	76	88	82	78	76	81	78	75	81	77	75	80	77	75	74			

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Unified Glare Rating Table

Lum. Name: AW21020	Lum. Catalog: Downlight	Test ID:
Lamp Name: C	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/22

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	8.0	8.9	8.4	9.3	9.6	9.0	9.9	9.4	10.2	10.5
	Y=3H	8.7	9.5	9.1	9.8	10.2	9.0	9.8	9.4	10.1	10.5
	Y=4H	9.0	9.7	9.4	10.1	10.5	8.9	9.7	9.3	10.0	10.4
	Y=6H	10.1	10.7	10.5	11.1	11.5	8.8	9.5	9.2	9.8	10.3
	Y=8H	10.3	10.9	10.8	11.3	11.8	8.8	9.4	9.2	9.8	10.2
	Y=12H	10.6	11.2	11.0	11.6	12.0	8.7	9.3	9.1	9.7	10.1
X=4H	Y=2H	7.9	8.6	8.3	9.0	9.4	8.9	9.7	9.4	10.0	10.4
	Y=3H	8.5	9.1	9.0	9.5	10.0	9.0	9.6	9.4	10.0	10.4
	Y=4H	8.9	9.4	9.3	9.8	10.3	8.9	9.4	9.3	9.9	10.3
	Y=6H	10.0	10.4	10.5	10.9	11.4	8.8	9.2	9.3	9.7	10.2
	Y=8H	10.3	10.7	10.8	11.2	11.7	8.7	9.1	9.2	9.6	10.1
	Y=12H	10.7	11.0	11.2	11.5	12.0	8.6	9.0	9.1	9.5	10.0
X=8H	Y=4H	8.7	9.1	9.2	9.6	10.1	8.7	9.2	9.2	9.6	10.1
	Y=6H	9.8	10.1	10.3	10.6	11.1	8.6	8.9	9.1	9.4	10.0
	Y=8H	10.1	10.4	10.7	10.9	11.4	8.5	8.8	9.1	9.3	9.8
	Y=12H	10.6	10.8	11.1	11.3	11.9	8.5	8.7	9.0	9.2	9.8
X=12H	Y=4H	8.6	9.0	9.1	9.5	10.0	8.7	9.0	9.2	9.5	10.0
	Y=6H	9.7	10.0	10.3	10.5	11.0	8.5	8.8	9.1	9.3	9.9
	Y=8H	10.1	10.3	10.6	10.8	11.4	8.5	8.7	9.0	9.2	9.8
Variations with the objverer position at spacings											
S=1.0H	0.3/-0.2					5.0/0.0					
S=1.5H	0.6/-0.7					4.5/-36.5					
S=2.0H	1.7/-1.5					4.3/-14.4					
Reduced UGR Table:											
Nordic Standard Table:	BKO					BKO					
Correction Value	1.8					0.3					

o the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Candela Tabulation

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 0.0	900.33	900.33	900.33	900.33	900.33	900.33	900.33	900.33	900.33	900.33	900.33	900.33
γ 1.0	901.59	888.56	889.52	886.94	880.81	873.86	860.01	854.12	898.77	889.05	887.84	893.80
γ 2.0	855.96	836.88	838.33	840.11	842.83	840.29	820.57	805.62	855.98	846.55	850.86	871.12
γ 3.0	789.27	760.42	758.69	767.94	781.66	786.80	769.21	743.28	799.30	786.41	792.23	826.06
γ 4.0	698.47	668.44	665.06	680.85	702.32	712.46	695.47	664.51	725.29	706.60	711.65	751.65
γ 5.0	587.81	563.85	561.98	579.41	602.92	611.05	589.92	566.56	638.78	610.17	605.71	643.60
γ 6.0	466.71	450.39	449.83	462.24	492.46	496.16	484.55	471.98	536.46	506.81	491.66	512.72
γ 7.0	359.84	351.31	349.14	365.97	396.67	405.73	403.76	396.57	442.25	415.93	397.15	404.83
γ 8.0	286.66	280.88	282.78	301.09	328.05	340.83	343.08	340.16	371.94	348.23	329.38	332.89
γ 9.0	236.67	233.86	238.22	256.14	281.52	295.76	303.50	301.49	319.34	298.22	281.38	280.95
γ 10.0	206.80	204.83	209.17	227.77	250.60	267.61	275.38	274.93	282.73	264.73	250.31	246.01
γ 11.0	190.63	186.26	191.07	205.60	226.14	241.81	249.90	250.35	260.67	243.46	231.74	226.81
γ 12.0	175.79	170.00	173.41	184.26	202.70	216.76	225.27	226.87	237.07	223.56	214.50	211.71
γ 13.0	159.37	154.07	156.04	164.42	180.55	192.45	201.00	203.32	214.10	202.84	196.17	194.64
γ 14.0	144.31	139.38	141.12	147.30	160.16	169.41	177.27	179.87	191.91	182.18	176.60	174.78
γ 15.0	130.51	126.24	127.33	133.48	142.84	149.27	155.70	158.16	169.86	161.49	155.54	153.16
γ 16.0	118.74	114.68	115.28	121.55	129.84	134.43	139.17	139.70	148.70	141.43	134.36	133.21
γ 17.0	109.13	104.86	105.15	112.32	120.14	124.01	126.07	123.39	130.30	122.55	116.46	116.06
γ 18.0	101.26	96.51	96.92	104.94	112.00	113.98	113.72	108.65	114.35	105.91	100.87	100.55
γ 19.0	92.20	88.06	89.44	97.42	103.42	102.86	101.49	95.41	99.71	91.60	87.79	87.26
γ 20.0	81.83	79.05	81.44	88.05	93.20	91.57	89.58	83.21	86.42	79.40	76.44	75.64
γ 21.0	71.01	69.76	73.30	78.85	82.70	81.01	78.15	72.48	74.76	68.91	66.36	65.58
γ 22.0	59.70	59.81	64.62	69.97	73.05	72.17	68.33	63.42	64.90	59.98	57.48	57.11
γ 23.0	49.96	50.26	55.10	60.09	63.67	64.23	60.09	55.83	56.48	52.19	49.94	49.72
γ 24.0	41.95	42.31	46.58	50.73	54.39	55.55	52.08	48.78	49.26	45.26	43.46	43.28
γ 25.0	34.37	34.93	38.91	42.44	45.74	46.74	43.85	41.46	42.76	38.83	36.98	36.92
γ 26.0	26.78	27.61	31.09	34.33	37.49	38.09	35.86	34.24	36.07	32.30	30.31	30.20
γ 27.0	21.50	21.88	24.04	26.71	29.71	30.09	28.72	27.86	29.28	26.17	24.60	24.63
γ 28.0	18.06	18.12	19.49	21.26	23.64	23.93	23.24	22.72	23.53	21.28	20.23	20.18
γ 29.0	15.74	15.59	16.49	17.47	19.26	19.76	19.40	19.04	18.92	17.51	16.98	16.77
γ 30.0	13.99	13.73	14.42	14.99	16.00	16.51	16.46	16.35	15.74	14.88	14.46	14.13
γ 31.0	12.51	12.19	12.80	13.20	13.80	14.14	14.25	14.25	13.46	12.80	12.28	11.92
γ 32.0	11.19	10.88	11.39	11.75	12.17	12.51	12.58	12.70	11.48	11.03	10.54	10.29
γ 33.0	9.98	9.71	10.15	10.47	10.83	11.12	11.22	11.38	10.09	9.65	9.18	8.90
γ 34.0	8.90	8.61	8.98	9.30	9.68	9.97	10.05	10.21	8.92	8.48	8.01	7.67
γ 35.0	7.85	7.55	7.92	8.25	8.61	8.89	9.01	9.15	7.83	7.44	6.91	6.60
γ 36.0	6.85	6.54	6.92	7.28	7.62	7.91	8.06	8.16	6.81	6.49	5.91	5.63
γ 37.0	5.90	5.63	6.03	6.32	6.68	6.98	7.15	7.26	5.86	5.57	4.99	4.67
γ 38.0	4.54	4.42	5.06	5.45	5.82	6.12	6.31	6.40	4.98	4.69	4.10	3.72
γ 39.0	3.79	3.39	3.72	4.37	4.97	5.36	5.56	5.61	4.14	3.88	3.32	2.89
γ 40.0	3.38	2.88	2.97	3.22	3.87	4.50	4.73	4.79	3.38	3.07	2.52	2.00
γ 41.0	3.13	2.57	2.63	2.72	2.97	3.23	3.52	3.73	2.57	2.12	1.38	0.84
γ 42.0	2.99	2.40	2.36	2.41	2.58	2.67	2.79	2.81	1.49	1.07	0.62	0.45
γ 43.0	2.89	2.32	2.22	2.21	2.32	2.38	2.44	2.46	0.49	0.40	0.27	0.18
γ 44.0	2.76	2.24	2.11	2.13	2.14	2.14	2.19	2.22	0.24	0.16	0.04	0.00
γ 45.0	2.65	2.16	2.06	2.02	2.03	1.99	2.05	2.07	0.01	0.00	0.00	0.00
γ 46.0	2.56	2.08	1.97	1.92	1.96	1.92	1.95	1.98	0.00	0.00	0.00	0.00

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 47.0	2.48	1.98	1.91	1.85	1.90	1.84	1.88	1.90	0.00	0.00	0.00	0.00
γ 48.0	2.37	1.90	1.82	1.77	1.81	1.75	1.79	1.82	0.00	0.00	0.00	0.00
γ 49.0	2.28	1.83	1.72	1.67	1.74	1.70	1.71	1.74	0.00	0.00	0.00	0.00
γ 50.0	2.18	1.75	1.64	1.62	1.68	1.64	1.62	1.65	0.00	0.00	0.00	0.00
γ 51.0	2.09	1.68	1.56	1.52	1.60	1.54	1.59	1.60	0.00	0.00	0.00	0.00
γ 52.0	1.99	1.60	1.47	1.46	1.52	1.49	1.53	1.53	0.00	0.00	0.00	0.00
γ 53.0	1.90	1.51	1.38	1.39	1.45	1.42	1.45	1.46	0.00	0.00	0.00	0.00
γ 54.0	1.85	1.42	1.34	1.34	1.37	1.37	1.40	1.41	0.00	0.00	0.00	0.00
γ 55.0	1.79	1.33	1.24	1.25	1.29	1.30	1.32	1.36	0.00	0.00	0.00	0.00
γ 56.0	1.70	1.24	1.16	1.18	1.23	1.24	1.26	1.30	0.00	0.00	0.00	0.00
γ 57.0	1.52	1.14	1.07	1.14	1.17	1.17	1.19	1.21	0.00	0.00	0.00	0.00
γ 58.0	1.43	1.05	0.97	1.02	1.11	1.07	1.11	1.12	0.00	0.00	0.00	0.00
γ 59.0	1.34	0.98	0.85	0.89	1.01	0.97	1.01	1.04	0.00	0.00	0.00	0.00
γ 60.0	1.27	0.93	0.78	0.78	0.87	0.88	0.90	0.91	0.00	0.00	0.00	0.00
γ 61.0	1.21	0.85	0.74	0.72	0.75	0.76	0.78	0.77	0.00	0.00	0.00	0.00
γ 62.0	1.17	0.79	0.69	0.67	0.67	0.66	0.68	0.69	0.00	0.00	0.00	0.00
γ 63.0	1.09	0.71	0.61	0.61	0.61	0.62	0.63	0.62	0.00	0.00	0.00	0.00
γ 64.0	1.06	0.66	0.58	0.54	0.54	0.57	0.57	0.58	0.00	0.00	0.00	0.00
γ 65.0	0.99	0.59	0.51	0.48	0.49	0.55	0.49	0.53	0.00	0.00	0.00	0.00
γ 66.0	0.92	0.54	0.45	0.45	0.43	0.48	0.47	0.47	0.00	0.00	0.00	0.00
γ 67.0	0.86	0.51	0.42	0.35	0.37	0.42	0.42	0.41	0.00	0.00	0.00	0.00
γ 68.0	0.82	0.48	0.35	0.34	0.32	0.40	0.36	0.36	0.00	0.00	0.00	0.00
γ 69.0	0.77	0.44	0.31	0.27	0.26	0.33	0.31	0.33	0.00	0.00	0.00	0.00
γ 70.0	0.75	0.38	0.29	0.27	0.21	0.28	0.29	0.29	0.00	0.00	0.00	0.00
γ 71.0	0.68	0.34	0.22	0.17	0.19	0.23	0.25	0.23	0.00	0.00	0.00	0.00
γ 72.0	0.63	0.29	0.17	0.17	0.15	0.19	0.22	0.20	0.00	0.00	0.00	0.00
γ 73.0	0.60	0.25	0.15	0.12	0.11	0.15	0.18	0.16	0.00	0.00	0.00	0.00
γ 74.0	0.57	0.21	0.12	0.09	0.08	0.12	0.15	0.12	0.00	0.00	0.00	0.00
γ 75.0	0.53	0.18	0.09	0.03	0.06	0.07	0.09	0.09	0.00	0.00	0.00	0.00
γ 76.0	0.53	0.15	0.05	0.00	0.03	0.03	0.08	0.06	0.00	0.00	0.00	0.00
γ 77.0	0.55	0.13	0.06	0.00	0.00	0.01	0.03	0.02	0.00	0.00	0.00	0.00
γ 78.0	0.66	0.11	0.03	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00
γ 79.0	0.78	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 80.0	0.69	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 81.0	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 82.0	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 83.0	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 84.0	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 85.0	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 86.0	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 87.0	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 88.0	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 89.0	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 90.0	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 91.0	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 93.0	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 94.0	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 96.0	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 97.0	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 108.0	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 109.0	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 113.0	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 136.0	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 137.0	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 138.0	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 139.0	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 140.0	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Candela Tabulation - (Cont.)

V/H	C0. 0	C22. 5	C45. 0	C67. 5	C90. 0	C112. 5	C135. 0	C157. 5	C180. 0	C202. 5	C225. 0	C247. 5
γ 141. 0	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 142. 0	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 143. 0	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 144. 0	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 145. 0	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 146. 0	0.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 147. 0	0.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 148. 0	0.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 149. 0	1.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 150. 0	1.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 151. 0	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 152. 0	2.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 153. 0	2.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 154. 0	3.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 155. 0	2.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 156. 0	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 157. 0	2.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	0.00	0.00	0.00
γ 158. 0	3.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.24	0.00	0.00	0.00
γ 159. 0	2.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.05	0.00	0.00	0.00
γ 160. 0	0.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.73	0.00	0.00	0.00
γ 161. 0	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.99	0.00	0.00	0.00
γ 162. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.69	0.00	0.00	0.00
γ 163. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.71	0.00	0.00	0.00
γ 164. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 165. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 166. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 167. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 168. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 169. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 170. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 171. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 172. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 173. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 174. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 175. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 176. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 177. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 178. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 179. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 180. 0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
V/H	C270. 0	C292. 5	C315. 0	C337. 5								
γ 0. 0	900.33	900.33	900.33	900.33								
γ 1. 0	900.84	909.91	913.84	914.09								
γ 2. 0	891.67	911.25	917.47	909.95								
γ 3. 0	858.09	885.29	891.34	874.12								
γ 4. 0	789.07	818.01	827.40	805.69								
γ 5. 0	680.34	707.49	727.28	705.51								

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 6. 0	545. 78	565. 69	594. 58	584. 96
γ 7. 0	427. 31	431. 80	458. 15	460. 94
γ 8. 0	344. 51	341. 64	350. 09	353. 10
γ 9. 0	284. 78	279. 48	278. 89	276. 44
γ 10. 0	244. 42	236. 22	232. 25	225. 90
γ 11. 0	220. 84	211. 36	201. 17	194. 45
γ 12. 0	205. 24	195. 43	184. 99	177. 57
γ 13. 0	187. 80	178. 26	171. 88	165. 55
γ 14. 0	167. 43	159. 49	156. 20	151. 25
γ 15. 0	148. 04	142. 31	139. 77	135. 81
γ 16. 0	130. 34	126. 56	124. 78	121. 35
γ 17. 0	113. 95	111. 87	111. 10	108. 95
γ 18. 0	99. 68	98. 86	99. 01	98. 32
γ 19. 0	87. 15	86. 67	87. 43	88. 51
γ 20. 0	75. 64	75. 43	76. 15	78. 63
γ 21. 0	65. 52	65. 74	65. 83	68. 70
γ 22. 0	57. 05	57. 12	57. 05	59. 03
γ 23. 0	49. 63	49. 31	49. 02	49. 58
γ 24. 0	42. 59	41. 57	40. 91	41. 06
γ 25. 0	35. 60	34. 13	33. 45	33. 82
γ 26. 0	29. 19	27. 88	27. 18	27. 07
γ 27. 0	23. 67	22. 29	21. 59	20. 96
γ 28. 0	19. 24	18. 02	17. 24	16. 46
γ 29. 0	15. 96	14. 74	14. 03	13. 40
γ 30. 0	13. 37	12. 29	11. 74	11. 32
γ 31. 0	11. 32	10. 54	10. 06	9. 78
γ 32. 0	9. 76	9. 10	8. 68	8. 51
γ 33. 0	8. 44	7. 80	7. 50	7. 39
γ 34. 0	7. 25	6. 72	6. 49	6. 37
γ 35. 0	6. 20	5. 77	5. 59	5. 43
γ 36. 0	5. 21	4. 88	4. 73	4. 51
γ 37. 0	4. 25	4. 01	3. 84	3. 64
γ 38. 0	3. 37	3. 15	2. 95	2. 71
γ 39. 0	2. 48	2. 18	1. 92	1. 56
γ 40. 0	1. 47	1. 11	0. 91	0. 79
γ 41. 0	0. 72	0. 64	0. 53	0. 41
γ 42. 0	0. 40	0. 38	0. 27	0. 17
γ 43. 0	0. 20	0. 22	0. 16	0. 03
γ 44. 0	0. 05	0. 12	0. 08	0. 00
γ 45. 0	0. 00	0. 03	0. 00	0. 00
γ 46. 0	0. 00	0. 00	0. 00	0. 00
γ 47. 0	0. 00	0. 00	0. 00	0. 00
γ 48. 0	0. 00	0. 00	0. 00	0. 00
γ 49. 0	0. 00	0. 00	0. 00	0. 00
γ 50. 0	0. 00	0. 00	0. 00	0. 00
γ 51. 0	0. 00	0. 00	0. 00	0. 00
γ 52. 0	0. 00	0. 00	0. 00	0. 00

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 53.0	0.00	0.00	0.00	0.00
γ 54.0	0.00	0.00	0.00	0.00
γ 55.0	0.00	0.00	0.00	0.00
γ 56.0	0.00	0.00	0.00	0.00
γ 57.0	0.00	0.00	0.00	0.00
γ 58.0	0.00	0.00	0.00	0.00
γ 59.0	0.00	0.00	0.00	0.00
γ 60.0	0.00	0.00	0.00	0.00
γ 61.0	0.00	0.00	0.00	0.00
γ 62.0	0.00	0.00	0.00	0.00
γ 63.0	0.00	0.00	0.00	0.00
γ 64.0	0.00	0.00	0.00	0.00
γ 65.0	0.00	0.00	0.00	0.00
γ 66.0	0.00	0.00	0.00	0.00
γ 67.0	0.00	0.00	0.00	0.00
γ 68.0	0.00	0.00	0.00	0.00
γ 69.0	0.00	0.00	0.00	0.00
γ 70.0	0.00	0.00	0.00	0.00
γ 71.0	0.00	0.00	0.00	0.00
γ 72.0	0.00	0.00	0.00	0.00
γ 73.0	0.00	0.00	0.00	0.00
γ 74.0	0.00	0.00	0.00	0.00
γ 75.0	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00	0.00	0.00
γ 80.0	0.00	0.00	0.00	0.00
γ 81.0	0.00	0.00	0.00	0.00
γ 82.0	0.00	0.00	0.00	0.00
γ 83.0	0.00	0.00	0.00	0.00
γ 84.0	0.00	0.00	0.00	0.00
γ 85.0	0.00	0.00	0.00	0.00
γ 86.0	0.00	0.00	0.00	0.00
γ 87.0	0.00	0.00	0.00	0.00
γ 88.0	0.00	0.00	0.00	0.00
γ 89.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00

-
-
-

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 100. 0	0. 00	0. 00	0. 00	0. 00
γ 101. 0	0. 00	0. 00	0. 00	0. 00
γ 102. 0	0. 00	0. 00	0. 00	0. 00
γ 103. 0	0. 00	0. 00	0. 00	0. 00
γ 104. 0	0. 00	0. 00	0. 00	0. 00
γ 105. 0	0. 00	0. 00	0. 00	0. 00
γ 106. 0	0. 00	0. 00	0. 00	0. 00
γ 107. 0	0. 00	0. 00	0. 00	0. 00
γ 108. 0	0. 00	0. 00	0. 00	0. 00
γ 109. 0	0. 00	0. 00	0. 00	0. 00
γ 110. 0	0. 00	0. 00	0. 00	0. 00
γ 111. 0	0. 00	0. 00	0. 00	0. 00
γ 112. 0	0. 00	0. 00	0. 00	0. 00
γ 113. 0	0. 00	0. 00	0. 00	0. 00
γ 114. 0	0. 00	0. 00	0. 00	0. 00
γ 115. 0	0. 00	0. 00	0. 00	0. 00
γ 116. 0	0. 00	0. 00	0. 00	0. 00
γ 117. 0	0. 00	0. 00	0. 00	0. 00
γ 118. 0	0. 00	0. 00	0. 00	0. 00
γ 119. 0	0. 00	0. 00	0. 00	0. 00
γ 120. 0	0. 00	0. 00	0. 00	0. 00
γ 121. 0	0. 00	0. 00	0. 00	0. 00
γ 122. 0	0. 00	0. 00	0. 00	0. 00
γ 123. 0	0. 00	0. 00	0. 00	0. 00
γ 124. 0	0. 00	0. 00	0. 00	0. 00
γ 125. 0	0. 00	0. 00	0. 00	0. 00
γ 126. 0	0. 00	0. 00	0. 00	0. 00
γ 127. 0	0. 00	0. 00	0. 00	0. 00
γ 128. 0	0. 00	0. 00	0. 00	0. 00
γ 129. 0	0. 00	0. 00	0. 00	0. 00
γ 130. 0	0. 00	0. 00	0. 00	0. 00
γ 131. 0	0. 00	0. 00	0. 00	0. 00
γ 132. 0	0. 00	0. 00	0. 00	0. 00
γ 133. 0	0. 00	0. 00	0. 00	0. 00
γ 134. 0	0. 00	0. 00	0. 00	0. 00
γ 135. 0	0. 00	0. 00	0. 00	0. 00
γ 136. 0	0. 00	0. 00	0. 00	0. 00
γ 137. 0	0. 00	0. 00	0. 00	0. 00
γ 138. 0	0. 00	0. 00	0. 00	0. 00
γ 139. 0	0. 00	0. 00	0. 00	0. 00
γ 140. 0	0. 00	0. 00	0. 00	0. 00
γ 141. 0	0. 00	0. 00	0. 00	0. 00
γ 142. 0	0. 00	0. 00	0. 00	0. 00
γ 143. 0	0. 00	0. 00	0. 00	0. 00
γ 144. 0	0. 00	0. 00	0. 00	0. 00
γ 145. 0	0. 00	0. 00	0. 00	0. 00
γ 146. 0	0. 00	0. 00	0. 00	0. 00

IES Indoor Report

Photometric Filename:AW21020-8W-C-3090-LDK-15D-AIDIming-500MA.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 147. 0	0. 00	0. 00	0. 00	0. 00
γ 148. 0	0. 00	0. 00	0. 00	0. 00
γ 149. 0	0. 00	0. 00	0. 00	0. 00
γ 150. 0	0. 00	0. 00	0. 00	0. 00
γ 151. 0	0. 00	0. 00	0. 00	0. 00
γ 152. 0	0. 00	0. 00	0. 00	0. 00
γ 153. 0	0. 00	0. 00	0. 00	0. 00
γ 154. 0	0. 00	0. 00	0. 00	0. 00
γ 155. 0	0. 00	0. 00	0. 00	0. 00
γ 156. 0	0. 00	0. 00	0. 00	0. 00
γ 157. 0	0. 00	0. 00	0. 00	0. 00
γ 158. 0	0. 00	0. 00	0. 00	0. 00
γ 159. 0	0. 00	0. 00	0. 00	0. 00
γ 160. 0	0. 00	0. 00	0. 00	0. 00
γ 161. 0	0. 00	0. 00	0. 00	0. 00
γ 162. 0	0. 00	0. 00	0. 00	0. 00
γ 163. 0	0. 00	0. 00	0. 00	0. 00
γ 164. 0	0. 00	0. 00	0. 00	0. 00
γ 165. 0	0. 00	0. 00	0. 00	0. 00
γ 166. 0	0. 00	0. 00	0. 00	0. 00
γ 167. 0	0. 00	0. 00	0. 00	0. 00
γ 168. 0	0. 00	0. 00	0. 00	0. 00
γ 169. 0	0. 00	0. 00	0. 00	0. 00
γ 170. 0	0. 00	0. 00	0. 00	0. 00
γ 171. 0	0. 00	0. 00	0. 00	0. 00
γ 172. 0	0. 00	0. 00	0. 00	0. 00
γ 173. 0	0. 00	0. 00	0. 00	0. 00
γ 174. 0	0. 00	0. 00	0. 00	0. 00
γ 175. 0	0. 00	0. 00	0. 00	0. 00
γ 176. 0	0. 00	0. 00	0. 00	0. 00
γ 177. 0	0. 00	0. 00	0. 00	0. 00
γ 178. 0	0. 00	0. 00	0. 00	0. 00
γ 179. 0	0. 00	0. 00	0. 00	0. 00
γ 180. 0	0. 00	0. 00	0. 00	0. 00