

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES



Indoor Luminaire Photometric Data

Description Information

Luminary Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Date: 2024/01/05
Manufacture:	Shld. Ang(°): 36	Test Machine:GON-2000
Test Lab: Test	Frequency(Hz): 50	Lamp CCT(K): 3000 Ra: 90
Lum. Size(W*L*H): 0.053m*0.053m*0.000m	Lum. Area(m ²): 0.002	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=22.5 γ=1.0	Temp. (°C): 25
		Humidity(%): 50.0

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 45.584	Luminary Flux(lm): 45.585	Field Angle(10%Imax): 61.5(°)	
Rated Power(W): 1	Luminary Efficiency: 100.00%	Down Lumens&Percent: 45.584lm 100.00%	
Rated Voltage(V): 220	Luminary EER(lm/W): 54.074	Up Lumens&Percent: 0.001lm 0.00%	
Tested Power(W): 0.843	Max. Candela(cd): 118.251	S/MH: C0_a180=0.547 C90_270=0.547	
Lamps' Inside: 1	Max Cand@Ang. (°): C=247.5 γ=1.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf): 220.1, 0.025, 0.488	Beam Angle(50%Imax): 32.9(°)	ErP Φuse(90°): 44.969lm	
Lamp Size(W*L*H): 0.053m*0.053m*0.000m	Left=-15.3°, Right=17.6°	IRF(%): 559.351	

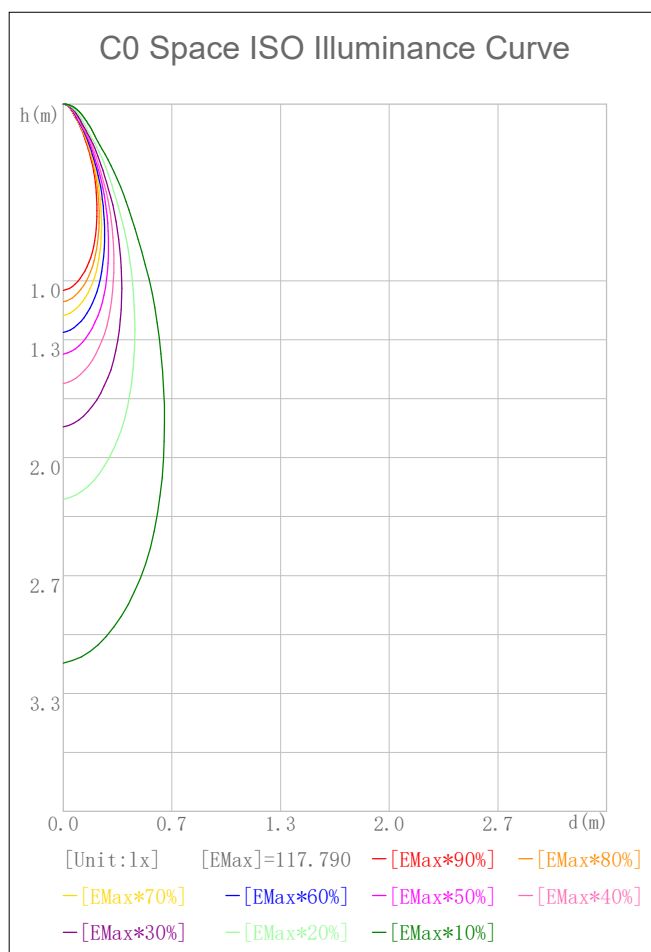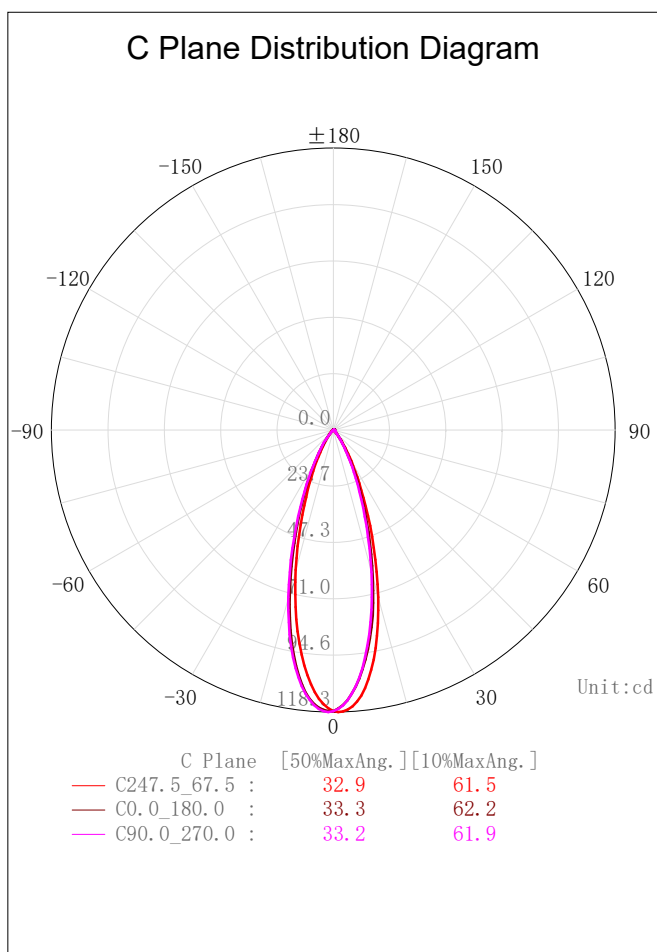



IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

2D Plane Light Intensity Distribution Curve

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

C Plane Distribution Diagram

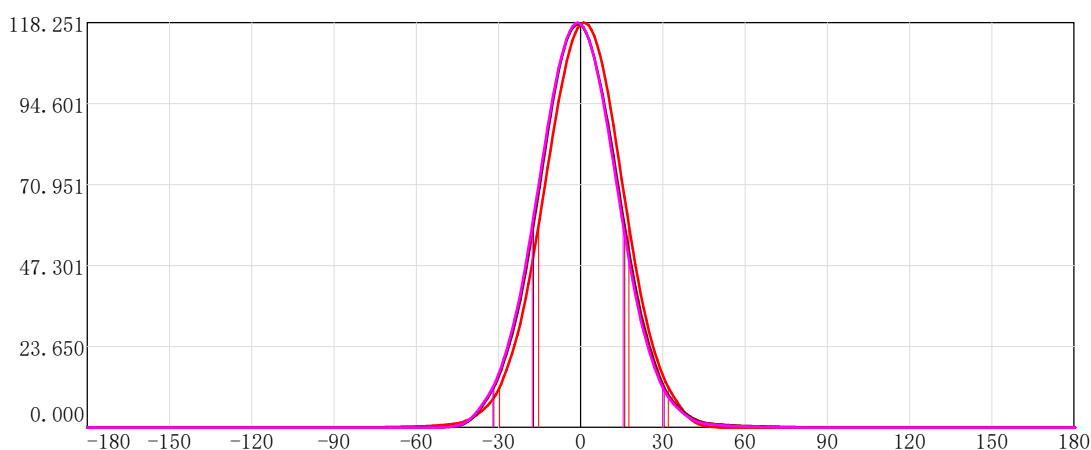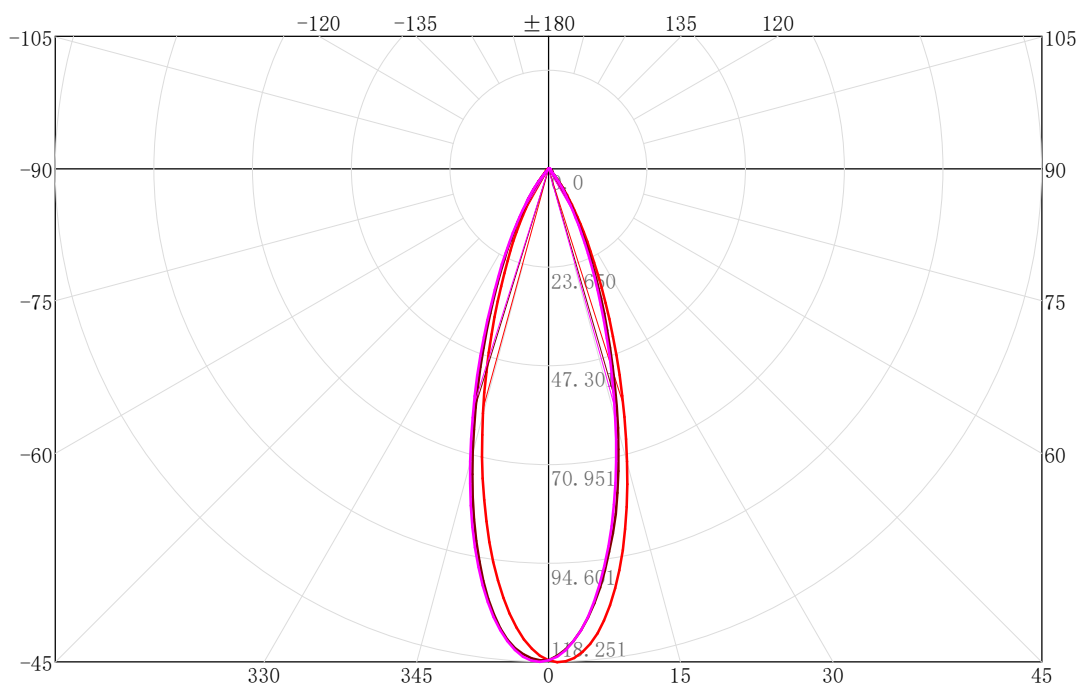

	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
—	C247.5_67.5 :	32.9	61.5	
—	C0.0_180.0 :	33.3	62.2	
—	C90.0_270.0 :	33.2	61.9	

IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

3D Light Intensity Distribution Modal

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

3D Light Intensity Distribution Modal



Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.11	0.11	0.25	0.25	47.0-48.0	0.05	45.06	0.11	98.84
1.0-2.0	0.34	0.45	0.74	0.98	48.0-49.0	0.05	45.10	0.10	98.94
2.0-3.0	0.55	1.00	1.22	2.20	49.0-50.0	0.04	45.14	0.09	99.03
3.0-4.0	0.76	1.77	1.68	3.88	50.0-51.0	0.04	45.18	0.08	99.11
4.0-5.0	0.96	2.73	2.11	5.99	51.0-52.0	0.03	45.21	0.07	99.18
5.0-6.0	1.15	3.88	2.52	8.51	52.0-53.0	0.03	45.24	0.06	99.24
6.0-7.0	1.32	5.20	2.89	11.40	53.0-54.0	0.03	45.26	0.06	99.29
7.0-8.0	1.47	6.66	3.22	14.62	54.0-55.0	0.02	45.29	0.05	99.35
8.0-9.0	1.60	8.26	3.50	18.12	55.0-56.0	0.02	45.31	0.05	99.40
9.0-10.0	1.70	9.96	3.74	21.86	56.0-57.0	0.02	45.33	0.05	99.44
10.0-11.0	1.79	11.75	3.93	25.78	57.0-58.0	0.02	45.35	0.04	99.48
11.0-12.0	1.85	13.61	4.06	29.85	58.0-59.0	0.02	45.37	0.04	99.53
12.0-13.0	1.89	15.50	4.15	34.00	59.0-60.0	0.02	45.39	0.04	99.56
13.0-14.0	1.91	17.41	4.19	38.19	60.0-61.0	0.02	45.40	0.04	99.60
14.0-15.0	1.91	19.32	4.19	42.38	61.0-62.0	0.02	45.42	0.03	99.63
15.0-16.0	1.89	21.20	4.14	46.52	62.0-63.0	0.01	45.43	0.03	99.67
16.0-17.0	1.85	23.05	4.06	50.57	63.0-64.0	0.01	45.45	0.03	99.70
17.0-18.0	1.80	24.85	3.94	54.51	64.0-65.0	0.01	45.46	0.03	99.73
18.0-19.0	1.73	26.58	3.80	58.31	65.0-66.0	0.01	45.47	0.03	99.75
19.0-20.0	1.66	28.23	3.63	61.94	66.0-67.0	0.01	45.48	0.03	99.78
20.0-21.0	1.57	29.81	3.45	65.39	67.0-68.0	0.01	45.49	0.02	99.80
21.0-22.0	1.48	31.29	3.25	68.64	68.0-69.0	0.01	45.51	0.02	99.83
22.0-23.0	1.39	32.68	3.06	71.69	69.0-70.0	0.01	45.51	0.02	99.85
23.0-24.0	1.30	33.98	2.86	74.55	70.0-71.0	0.01	45.52	0.02	99.87
24.0-25.0	1.21	35.20	2.66	77.21	71.0-72.0	0.01	45.53	0.02	99.89
25.0-26.0	1.12	36.32	2.47	79.68	72.0-73.0	0.01	45.54	0.02	99.90
26.0-27.0	1.04	37.36	2.28	81.95	73.0-74.0	0.01	45.55	0.02	99.92
27.0-28.0	0.95	38.31	2.08	84.04	74.0-75.0	0.01	45.55	0.01	99.93
28.0-29.0	0.86	39.17	1.89	85.93	75.0-76.0	0.01	45.56	0.01	99.94
29.0-30.0	0.78	39.95	1.70	87.63	76.0-77.0	0.00	45.56	0.01	99.95
30.0-31.0	0.70	40.64	1.53	89.16	77.0-78.0	0.00	45.57	0.01	99.96
31.0-32.0	0.63	41.27	1.38	90.54	78.0-79.0	0.00	45.57	0.01	99.97
32.0-33.0	0.56	41.83	1.24	91.77	79.0-80.0	0.00	45.57	0.01	99.98
33.0-34.0	0.50	42.34	1.11	92.88	80.0-81.0	0.00	45.58	0.01	99.98
34.0-35.0	0.45	42.79	0.99	93.87	81.0-82.0	0.00	45.58	0.00	99.99
35.0-36.0	0.40	43.19	0.87	94.74	82.0-83.0	0.00	45.58	0.00	99.99
36.0-37.0	0.35	43.53	0.76	95.50	83.0-84.0	0.00	45.58	0.00	99.99
37.0-38.0	0.30	43.83	0.65	96.16	84.0-85.0	0.00	45.58	0.00	99.99
38.0-39.0	0.25	44.08	0.55	96.70	85.0-86.0	0.00	45.58	0.00	100.00
39.0-40.0	0.21	44.29	0.45	97.16	86.0-87.0	0.00	45.58	0.00	100.00
40.0-41.0	0.17	44.46	0.37	97.53	87.0-88.0	0.00	45.58	0.00	100.00
41.0-42.0	0.14	44.60	0.31	97.84	88.0-89.0	0.00	45.58	0.00	100.00
42.0-43.0	0.11	44.71	0.25	98.09	89.0-90.0	0.00	45.58	0.00	100.00
43.0-44.0	0.09	44.80	0.20	98.29	90.0-91.0	0.00	45.58	0.00	100.00
44.0-45.0	0.08	44.88	0.17	98.46	91.0-92.0	0.00	45.58	0.00	100.00
45.0-46.0	0.07	44.95	0.14	98.60	92.0-93.0	0.00	45.58	0.00	100.00
46.0-47.0	0.06	45.01	0.13	98.73	93.0-94.0	0.00	45.58	0.00	100.00

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Zonal Flux Tabulation - (Cont.)


Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	45.58	0.00	100.00	141.0-142.0	0.00	45.58	0.00	100.00
95.0-96.0	0.00	45.58	0.00	100.00	142.0-143.0	0.00	45.58	0.00	100.00
96.0-97.0	0.00	45.58	0.00	100.00	143.0-144.0	0.00	45.58	0.00	100.00
97.0-98.0	0.00	45.58	0.00	100.00	144.0-145.0	0.00	45.58	0.00	100.00
98.0-99.0	0.00	45.58	0.00	100.00	145.0-146.0	0.00	45.58	0.00	100.00
99.0-100.0	0.00	45.58	0.00	100.00	146.0-147.0	0.00	45.58	0.00	100.00
100.0-101.0	0.00	45.58	0.00	100.00	147.0-148.0	0.00	45.58	0.00	100.00
101.0-102.0	0.00	45.58	0.00	100.00	148.0-149.0	0.00	45.58	0.00	100.00
102.0-103.0	0.00	45.58	0.00	100.00	149.0-150.0	0.00	45.58	0.00	100.00
103.0-104.0	0.00	45.58	0.00	100.00	150.0-151.0	0.00	45.58	0.00	100.00
104.0-105.0	0.00	45.58	0.00	100.00	151.0-152.0	0.00	45.58	0.00	100.00
105.0-106.0	0.00	45.58	0.00	100.00	152.0-153.0	0.00	45.58	0.00	100.00
106.0-107.0	0.00	45.58	0.00	100.00	153.0-154.0	0.00	45.58	0.00	100.00
107.0-108.0	0.00	45.58	0.00	100.00	154.0-155.0	0.00	45.58	0.00	100.00
108.0-109.0	0.00	45.58	0.00	100.00	155.0-156.0	0.00	45.58	0.00	100.00
109.0-110.0	0.00	45.58	0.00	100.00	156.0-157.0	0.00	45.58	0.00	100.00
110.0-111.0	0.00	45.58	0.00	100.00	157.0-158.0	0.00	45.58	0.00	100.00
111.0-112.0	0.00	45.58	0.00	100.00	158.0-159.0	0.00	45.58	0.00	100.00
112.0-113.0	0.00	45.58	0.00	100.00	159.0-160.0	0.00	45.58	0.00	100.00
113.0-114.0	0.00	45.58	0.00	100.00	160.0-161.0	0.00	45.58	0.00	100.00
114.0-115.0	0.00	45.58	0.00	100.00	161.0-162.0	0.00	45.58	0.00	100.00
115.0-116.0	0.00	45.58	0.00	100.00	162.0-163.0	0.00	45.58	0.00	100.00
116.0-117.0	0.00	45.58	0.00	100.00	163.0-164.0	0.00	45.58	0.00	100.00
117.0-118.0	0.00	45.58	0.00	100.00	164.0-165.0	0.00	45.58	0.00	100.00
118.0-119.0	0.00	45.58	0.00	100.00	165.0-166.0	0.00	45.58	0.00	100.00
119.0-120.0	0.00	45.58	0.00	100.00	166.0-167.0	0.00	45.58	0.00	100.00
120.0-121.0	0.00	45.58	0.00	100.00	167.0-168.0	0.00	45.58	0.00	100.00
121.0-122.0	0.00	45.58	0.00	100.00	168.0-169.0	0.00	45.58	0.00	100.00
122.0-123.0	0.00	45.58	0.00	100.00	169.0-170.0	0.00	45.58	0.00	100.00
123.0-124.0	0.00	45.58	0.00	100.00	170.0-171.0	0.00	45.58	0.00	100.00
124.0-125.0	0.00	45.58	0.00	100.00	171.0-172.0	0.00	45.58	0.00	100.00
125.0-126.0	0.00	45.58	0.00	100.00	172.0-173.0	0.00	45.58	0.00	100.00
126.0-127.0	0.00	45.58	0.00	100.00	173.0-174.0	0.00	45.58	0.00	100.00
127.0-128.0	0.00	45.58	0.00	100.00	174.0-175.0	0.00	45.58	0.00	100.00
128.0-129.0	0.00	45.58	0.00	100.00	175.0-176.0	0.00	45.58	0.00	100.00
129.0-130.0	0.00	45.58	0.00	100.00	176.0-177.0	0.00	45.58	0.00	100.00
130.0-131.0	0.00	45.58	0.00	100.00	177.0-178.0	0.00	45.58	0.00	100.00
131.0-132.0	0.00	45.58	0.00	100.00	178.0-179.0	0.00	45.58	0.00	100.00
132.0-133.0	0.00	45.58	0.00	100.00	179.0-180.0	0.00	45.58	0.00	100.00
133.0-134.0	0.00	45.58	0.00	100.00					
134.0-135.0	0.00	45.58	0.00	100.00					
135.0-136.0	0.00	45.58	0.00	100.00					
136.0-137.0	0.00	45.58	0.00	100.00					
137.0-138.0	0.00	45.58	0.00	100.00					
138.0-139.0	0.00	45.58	0.00	100.00					
139.0-140.0	0.00	45.58	0.00	100.00					
140.0-141.0	0.00	45.58	0.00	100.00					

IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

Rectangle ISO Lighting Intensity Diagram

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

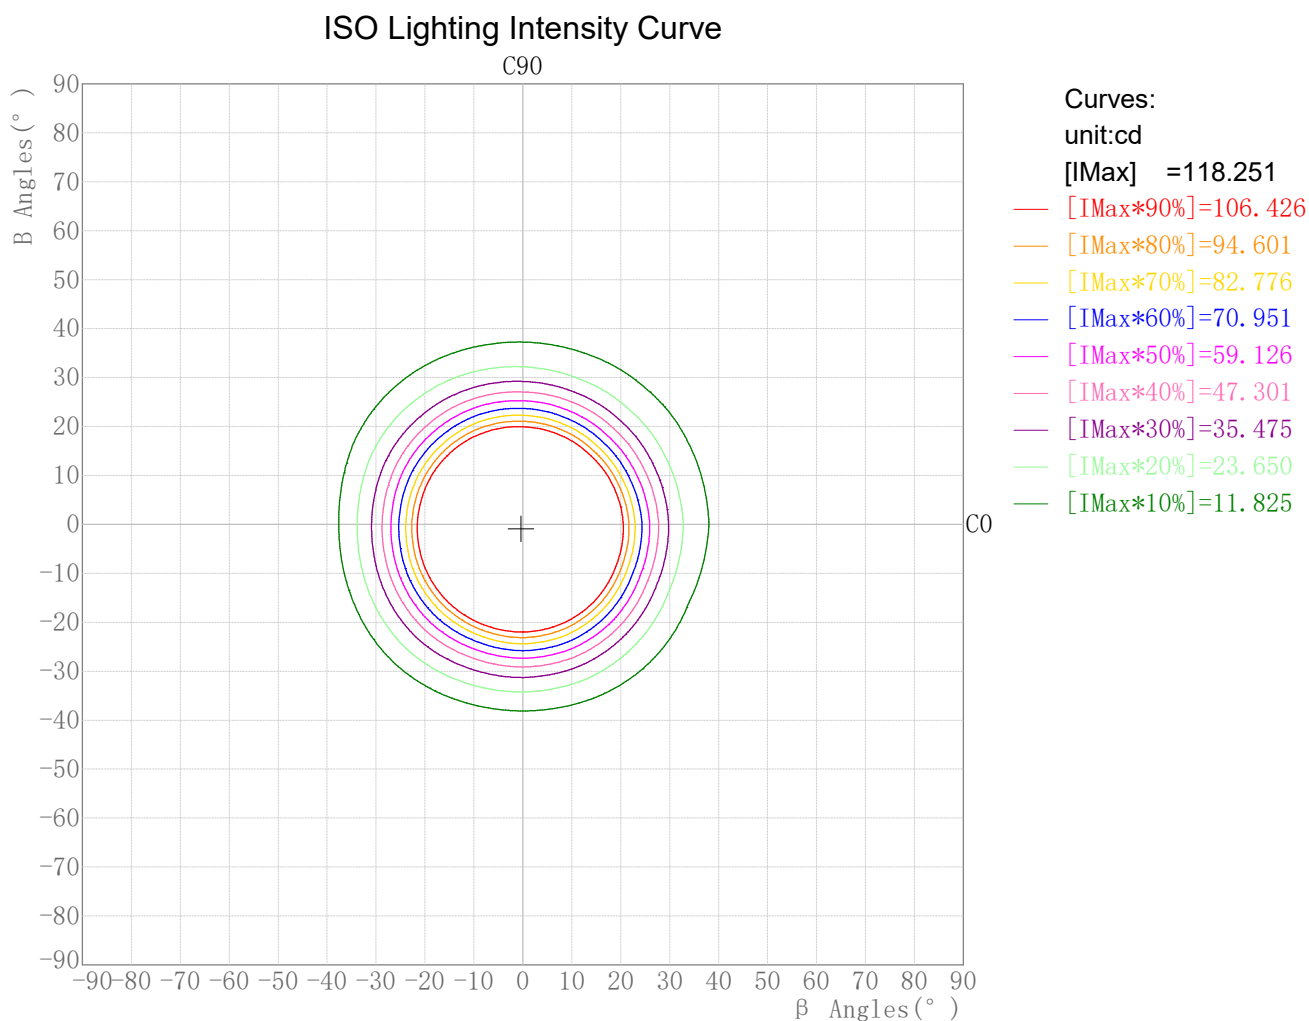


IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

Round ISO Lighting Intensity Diagram

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

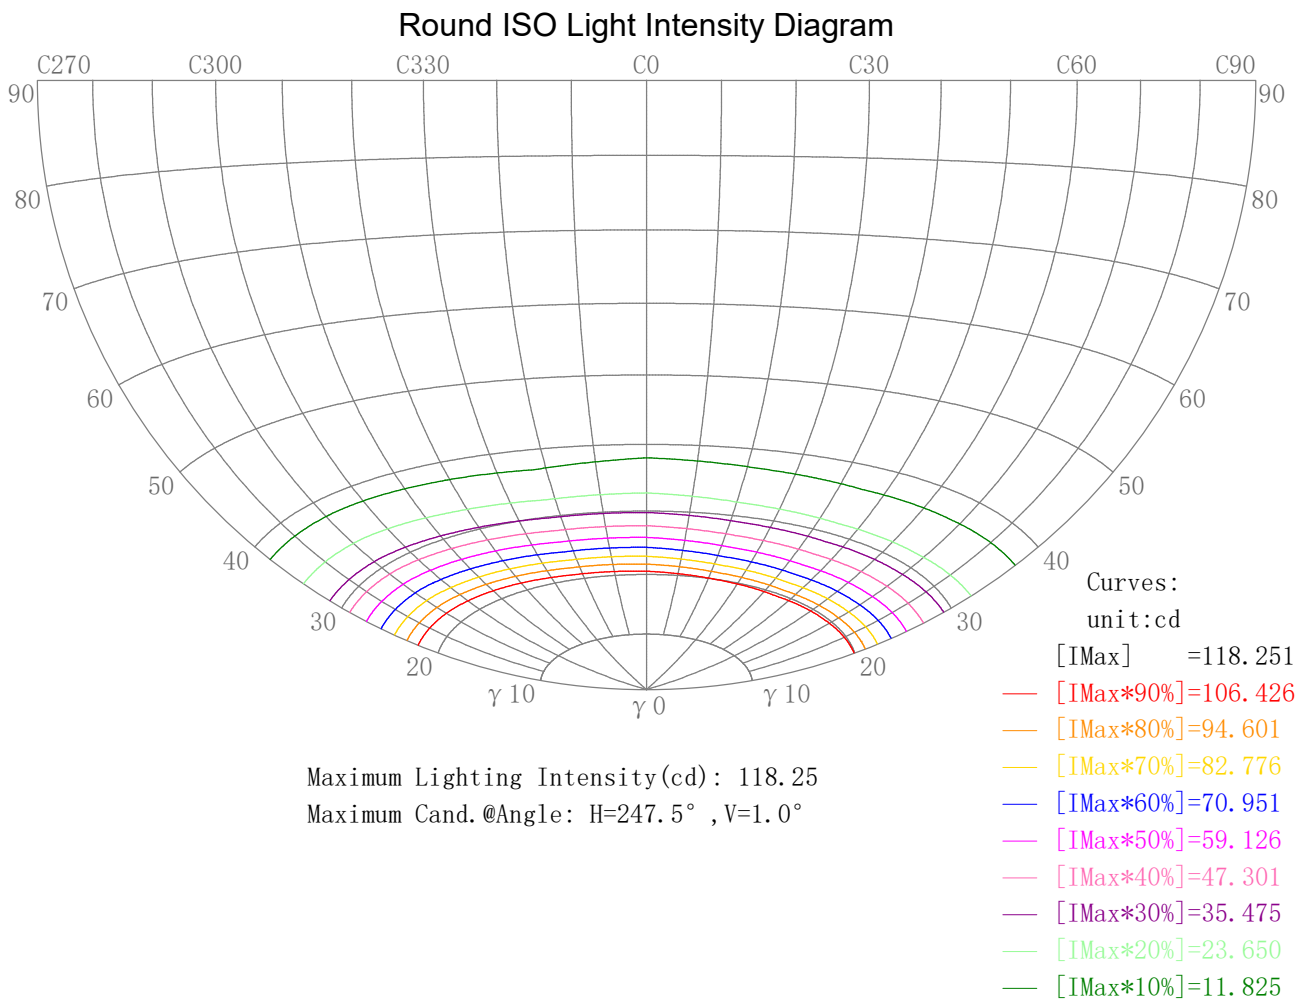


IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

Plane ISO-Illuminance Diagram

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

Plane ISO-Illuminance Curve

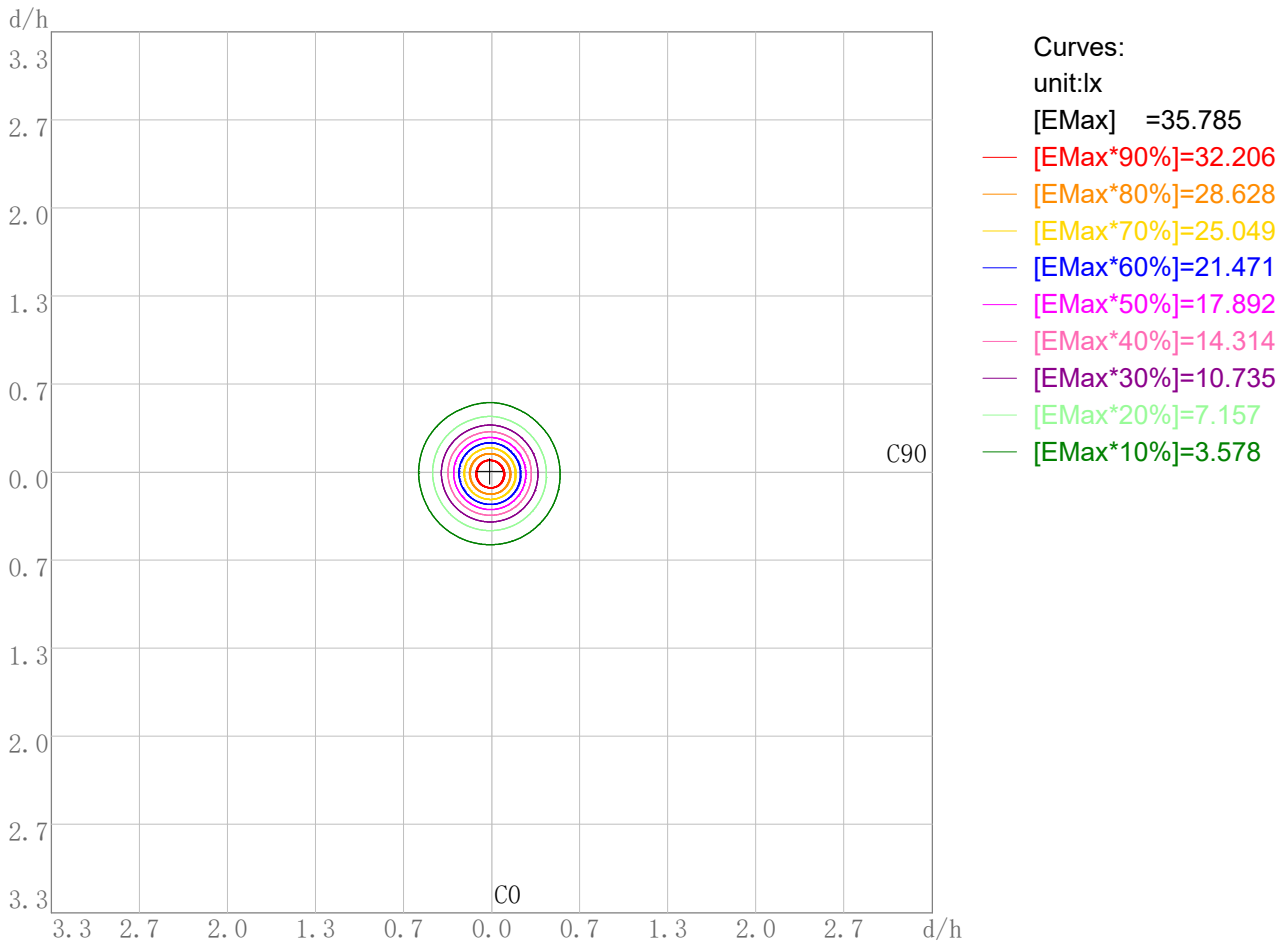

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 35.78

Working Plane Maximum Illuminance Position(d/h):H-0.0 V-0.0

IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

3D Plane ISO Illuminance Diagram

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

3D Plane Illuminance Modal



Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0


IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

Space ISO Illuminance Diagram

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

Space ISO Illuminance Curve

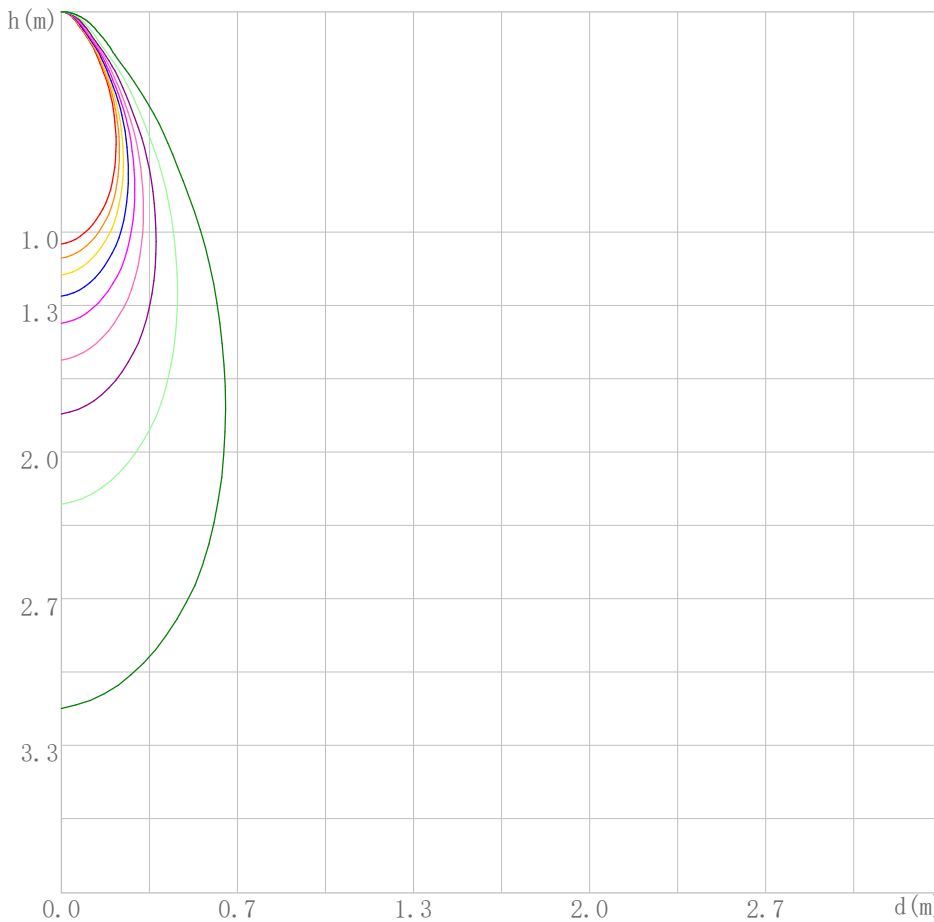

- Curves:
[Unit: lx]
[EMax] = 117.790
- [EMax*90%]=106.011
 - [EMax*80%]=94.232
 - [EMax*70%]=82.453
 - [EMax*60%]=70.674
 - [EMax*50%]=58.895
 - [EMax*40%]=47.116
 - [EMax*30%]=35.337
 - [EMax*20%]=23.558
 - [EMax*10%]=11.779

Space Plane Maximum Illuminance and @Angle:117.79lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:117.790cd,0deg


IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

Illuminance-Distance Diagram

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

Illuminance-Distance Curve

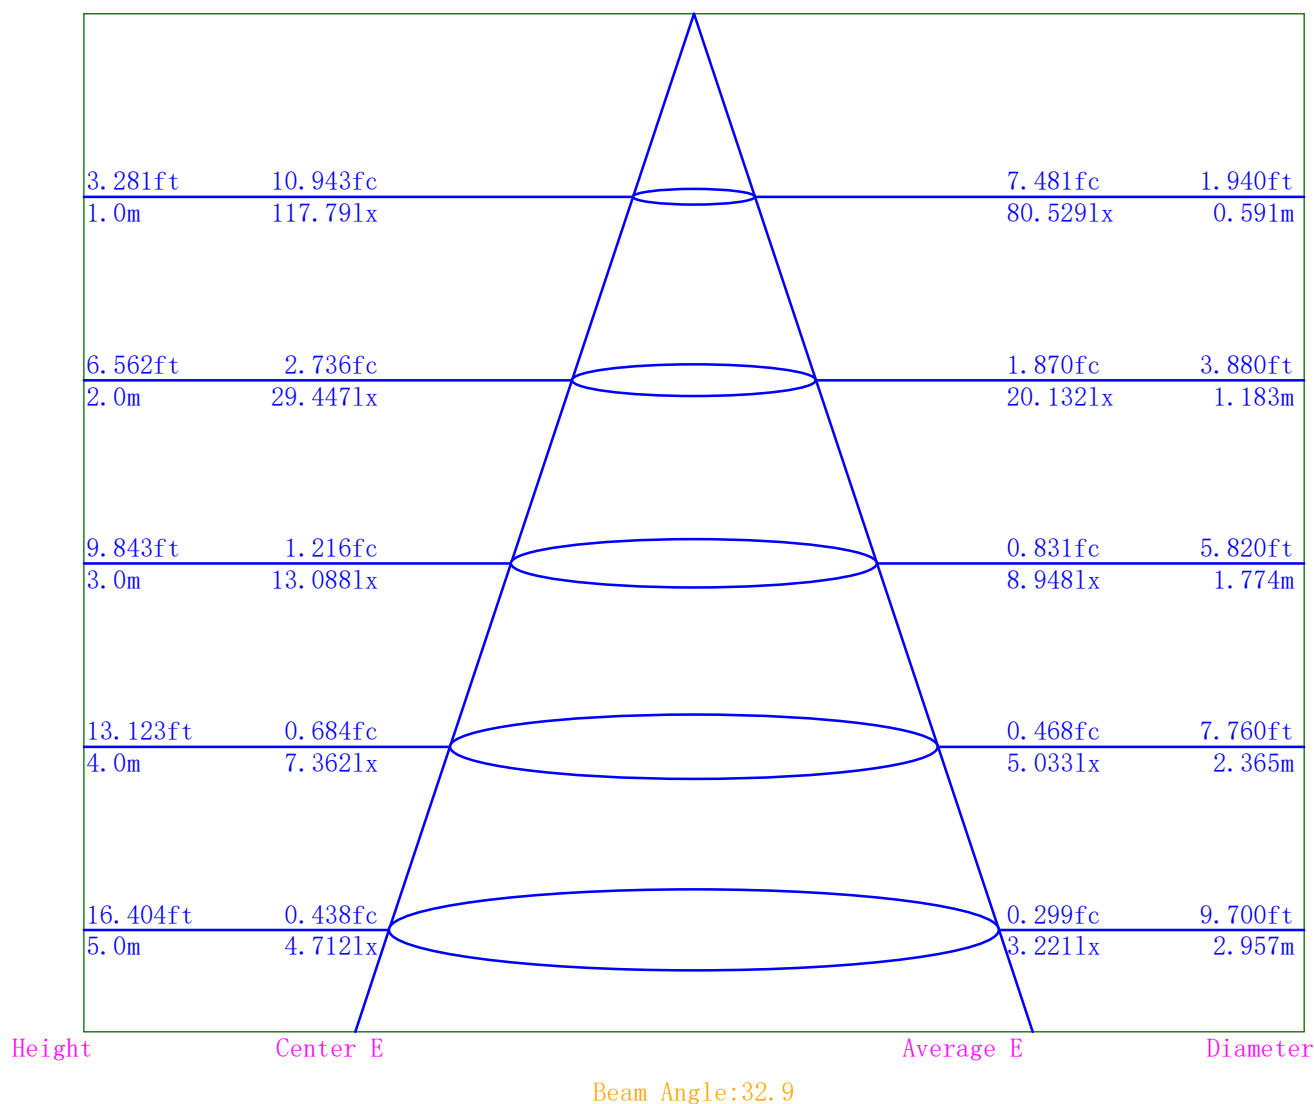

IES Indoor Report

Photometric Filename: AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Indoor Luminance Limiting Curves

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	957	683	523	439	392	365	350	347	418
C90	779	546	387	308	258	206	150	99	0

Luminance Limiting Curve

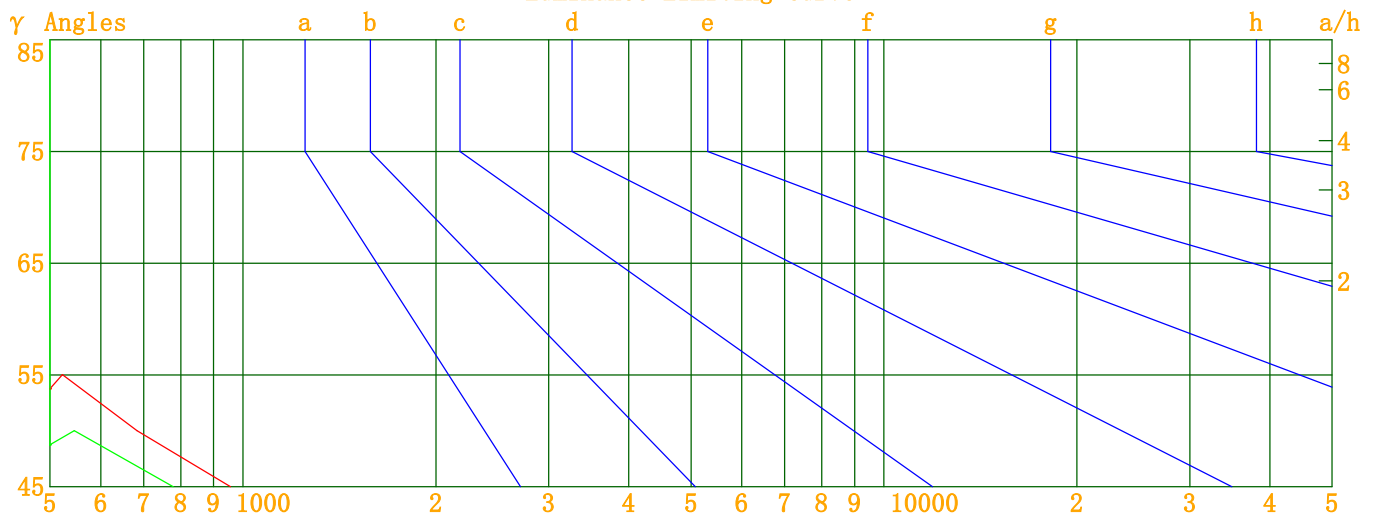


Luminous Size: Length(m)=-0.053 Width(m)=-0.053 Height(m)=0.000 Area(m^2)=0.002206
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —

IES Indoor Report

Photometric Filename: **AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES**

Indoor Budgetary Estimate Table

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/05

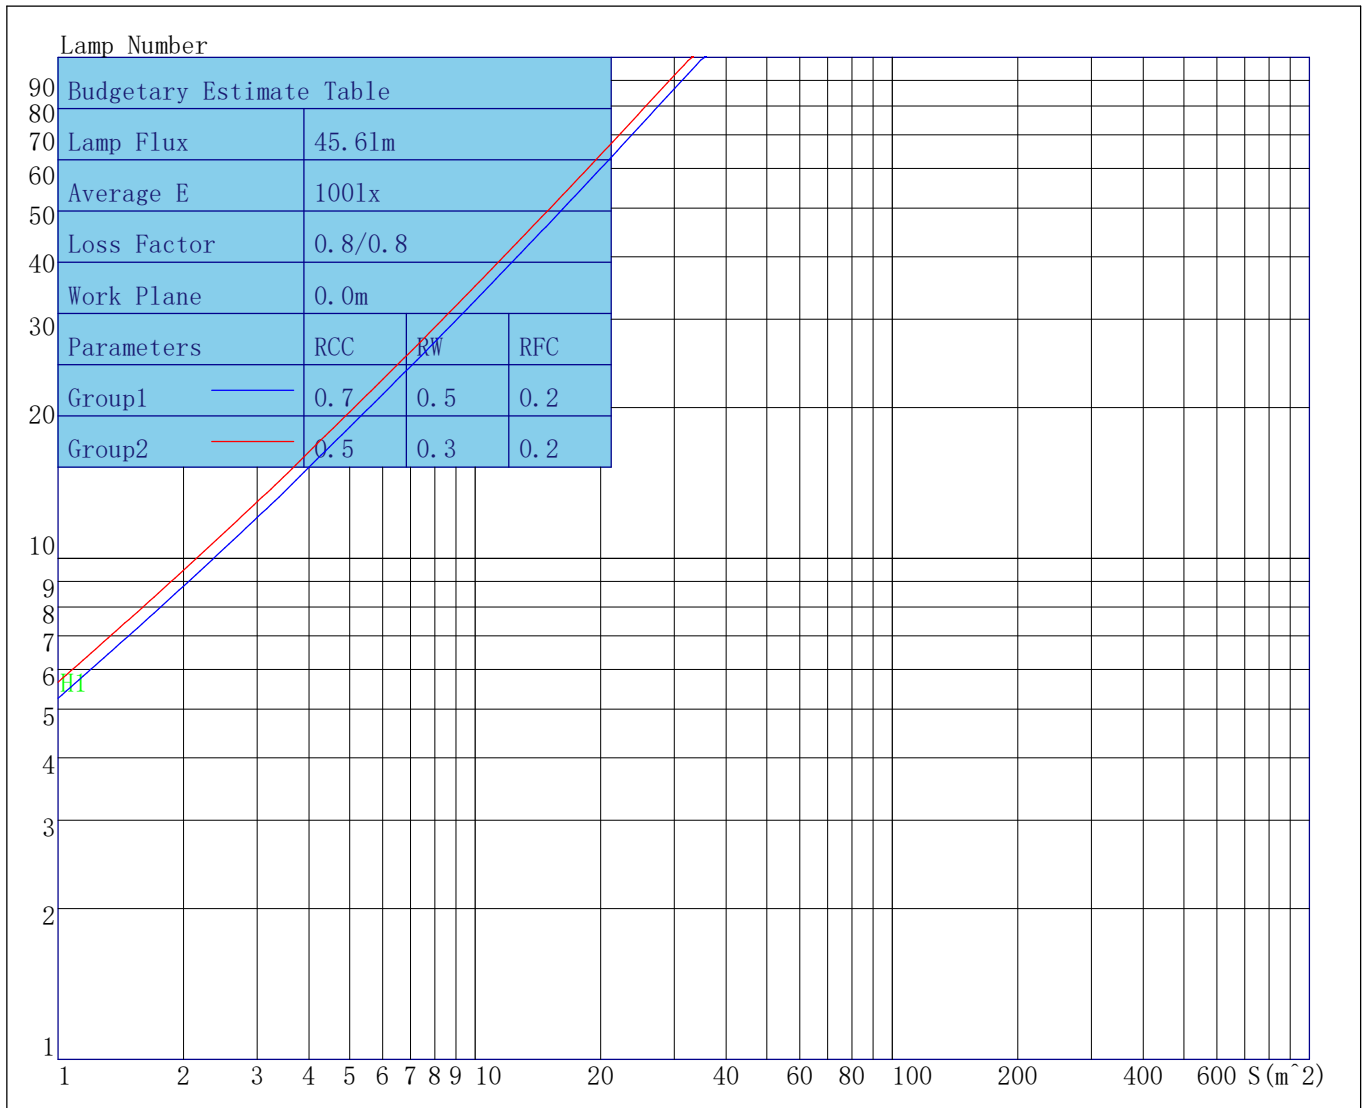

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
 Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
 Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Indoor Coefficient of Utilization Table

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/05

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization (%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	84	88	86	84	82
5	97	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	78
6	94	86	81	78	92	86	81	78	84	80	77	83	79	77	82	79	76	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	63

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Unified Glare Rating Table

Lum. Name: AD20157	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/05

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	5.7	6.6	6.0	6.9	7.2	5.6	6.5	6.0	6.8	7.2
	Y=3H	5.7	6.5	6.1	6.9	7.2	5.6	6.4	6.0	6.7	7.1
	Y=4H	5.8	6.6	6.2	6.9	7.3	5.6	6.3	6.0	6.7	7.1
	Y=6H	5.9	6.6	6.3	6.9	7.3	5.5	6.2	5.9	6.5	6.9
	Y=8H	5.9	6.6	6.4	7.0	7.4	5.4	6.1	5.9	6.5	6.9
	Y=12H	6.0	6.6	6.4	7.0	7.4	5.4	6.0	5.8	6.4	6.8
X=4H	Y=2H	5.4	6.2	5.8	6.5	6.9	5.4	6.2	5.8	6.5	6.9
	Y=3H	5.5	6.1	5.9	6.5	6.9	5.5	6.1	5.9	6.5	6.9
	Y=4H	5.6	6.1	6.0	6.6	7.0	5.5	6.0	5.9	6.4	6.9
	Y=6H	5.7	6.2	6.2	6.6	7.1	5.4	5.8	5.9	6.3	6.8
	Y=8H	5.8	6.2	6.3	6.6	7.1	5.3	5.7	5.8	6.2	6.7
	Y=12H	5.9	6.2	6.4	6.7	7.2	5.3	5.6	5.7	6.1	6.6
X=8H	Y=4H	5.4	5.9	5.9	6.3	6.8	5.3	5.7	5.8	6.2	6.7
	Y=6H	5.5	5.9	6.1	6.4	6.9	5.3	5.6	5.8	6.1	6.6
	Y=8H	5.6	5.9	6.2	6.4	6.9	5.2	5.5	5.7	6.0	6.5
	Y=12H	5.7	6.0	6.3	6.5	7.1	5.1	5.4	5.7	5.9	6.5
X=12H	Y=4H	5.4	5.7	5.9	6.2	6.7	5.3	5.6	5.8	6.1	6.6
	Y=6H	5.5	5.8	6.0	6.2	6.8	5.2	5.5	5.7	6.0	6.5
	Y=8H	5.6	5.8	6.1	6.3	6.9	5.1	5.4	5.7	5.9	6.5
Variations with the objverer position at spacings											
S=1.0H	0.3/-0.4					1.2/-1.7					
S=1.5H	1.0/-0.7					1.7/-2.2					
S=2.0H	2.1/-1.5					2.2/-3.1					
Reduced UGR Table:											
Nordic Standard Table:	BKO					BKO					
Correction Value	0.6					0.3					

o the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Candela Tabulation

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 0.0	117.79	117.79	117.79	117.79	117.79	117.79	117.79	117.79	117.79	117.79	117.79	117.79
γ 1.0	116.73	116.59	116.51	116.71	116.96	117.33	117.60	117.91	117.81	117.94	118.12	118.25
γ 2.0	115.34	115.02	114.83	115.08	115.45	116.10	116.69	117.32	117.43	117.69	118.00	118.11
γ 3.0	113.39	112.86	112.59	112.93	113.43	114.31	115.27	116.22	116.53	116.95	117.35	117.39
γ 4.0	110.93	110.25	109.80	110.25	110.91	112.00	113.29	114.62	115.17	115.70	116.14	116.11
γ 5.0	107.98	107.16	106.52	107.02	107.86	109.17	110.75	112.42	113.24	113.83	114.32	114.29
γ 6.0	104.71	103.64	102.96	103.38	104.34	105.87	107.73	109.58	110.70	111.35	112.00	111.97
γ 7.0	101.09	99.91	99.05	99.40	100.42	102.11	104.24	106.31	107.58	108.32	109.18	109.07
γ 8.0	97.19	95.92	94.83	95.14	96.15	97.98	100.28	102.59	103.96	104.84	105.85	105.63
γ 9.0	92.92	91.56	90.28	90.59	91.63	93.57	95.92	98.38	99.96	100.88	102.03	101.81
γ 10.0	88.69	86.88	85.54	85.80	86.93	88.89	91.26	93.74	95.57	96.61	97.68	97.69
γ 11.0	84.31	82.04	80.56	80.86	82.02	83.90	86.35	88.85	90.82	92.01	92.97	93.13
γ 12.0	79.41	77.08	75.47	75.89	76.99	78.86	81.27	83.74	85.84	87.08	88.00	88.25
γ 13.0	74.35	72.05	70.37	70.84	71.93	73.78	76.09	78.59	80.70	81.90	82.86	83.13
γ 14.0	69.29	67.00	65.36	65.75	66.86	68.70	70.92	73.44	75.47	76.59	77.61	77.87
γ 15.0	64.25	62.01	60.35	60.73	61.77	63.58	65.84	68.27	70.22	71.23	72.29	72.60
γ 16.0	59.27	57.08	55.44	55.83	56.78	58.57	60.82	63.17	64.98	65.92	66.99	67.37
γ 17.0	54.43	52.28	50.63	50.99	51.94	53.63	55.83	58.10	59.86	60.76	61.81	62.21
γ 18.0	49.78	47.64	46.04	46.35	47.31	48.89	50.96	53.18	54.94	55.86	56.81	57.19
γ 19.0	45.36	43.18	41.63	41.97	42.92	44.42	46.28	48.43	50.21	51.11	51.93	52.29
γ 20.0	41.16	38.97	37.47	37.85	38.78	40.19	41.88	43.88	45.65	46.55	47.22	47.57
γ 21.0	37.18	35.00	33.64	33.99	34.90	36.21	37.76	39.60	41.33	42.24	42.77	43.07
γ 22.0	33.51	31.33	30.11	30.41	31.32	32.56	33.92	35.67	37.31	38.19	38.65	38.85
γ 23.0	30.13	27.98	26.85	27.15	28.04	29.23	30.38	32.06	33.57	34.41	34.77	34.92
γ 24.0	27.05	24.94	23.92	24.20	25.08	26.18	27.18	28.84	30.12	30.95	31.20	31.27
γ 25.0	24.16	22.23	21.27	21.56	22.35	23.38	24.32	25.91	27.02	27.74	27.95	27.91
γ 26.0	21.46	19.76	18.91	19.20	19.78	20.75	21.75	23.24	24.20	24.78	25.07	24.89
γ 27.0	19.08	17.49	16.71	16.94	17.44	18.33	19.31	20.74	21.56	22.10	22.41	22.18
γ 28.0	16.74	15.31	14.55	14.74	15.32	16.16	16.99	18.29	19.19	19.61	19.92	19.70
γ 29.0	14.54	13.25	12.54	12.71	13.36	14.09	14.90	16.08	16.78	17.27	17.56	17.41
γ 30.0	12.60	11.45	10.82	10.96	11.64	12.31	13.05	14.13	14.66	15.12	15.46	15.30
γ 31.0	10.96	9.94	9.37	9.51	10.16	10.76	11.45	12.45	12.85	13.26	13.57	13.41
γ 32.0	9.58	8.66	8.14	8.28	8.89	9.44	10.05	10.96	11.22	11.61	11.91	11.74
γ 33.0	8.40	7.56	7.10	7.24	7.80	8.28	8.80	9.59	9.79	10.13	10.40	10.28
γ 34.0	7.38	6.64	6.22	6.35	6.84	7.25	7.69	8.38	8.47	8.77	9.00	8.96
γ 35.0	6.51	5.83	5.45	5.57	6.00	6.33	6.69	7.26	7.25	7.49	7.72	7.72
γ 36.0	5.74	5.13	4.78	4.89	5.23	5.48	5.73	6.21	6.08	6.26	6.50	6.56
γ 37.0	5.04	4.50	4.19	4.26	4.51	4.66	4.83	5.19	4.97	5.07	5.33	5.43
γ 38.0	4.35	3.90	3.63	3.68	3.83	3.91	4.03	4.27	3.93	3.98	4.20	4.33
γ 39.0	3.72	3.34	3.12	3.14	3.23	3.24	3.32	3.48	3.04	3.06	3.23	3.35
γ 40.0	3.18	2.83	2.66	2.65	2.71	2.69	2.73	2.84	2.32	2.33	2.47	2.54
γ 41.0	2.72	2.41	2.27	2.26	2.27	2.24	2.25	2.32	1.78	1.76	1.86	1.92
γ 42.0	2.33	2.06	1.94	1.92	1.91	1.87	1.86	1.92	1.32	1.30	1.40	1.43
γ 43.0	2.00	1.74	1.64	1.63	1.62	1.58	1.56	1.61	0.95	0.93	1.02	1.05
γ 44.0	1.71	1.51	1.41	1.39	1.38	1.36	1.34	1.38	0.68	0.66	0.73	0.74
γ 45.0	1.49	1.32	1.24	1.23	1.21	1.21	1.18	1.21	0.49	0.49	0.53	0.53
γ 46.0	1.34	1.17	1.11	1.12	1.10	1.09	1.08	1.10	0.37	0.36	0.39	0.40

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 47.0	1.22	1.07	1.02	1.02	1.00	0.99	0.99	1.01	0.28	0.26	0.30	0.30
γ 48.0	1.13	0.98	0.94	0.94	0.92	0.93	0.91	0.93	0.20	0.18	0.22	0.21
γ 49.0	1.05	0.91	0.87	0.86	0.85	0.84	0.83	0.85	0.14	0.12	0.15	0.14
γ 50.0	0.97	0.83	0.79	0.79	0.77	0.77	0.77	0.78	0.08	0.06	0.09	0.08
γ 51.0	0.90	0.76	0.72	0.72	0.71	0.71	0.70	0.72	0.02	0.00	0.03	0.02
γ 52.0	0.84	0.70	0.66	0.66	0.64	0.65	0.64	0.65	0.00	0.00	0.00	0.00
γ 53.0	0.77	0.64	0.59	0.60	0.59	0.59	0.58	0.60	0.00	0.00	0.00	0.00
γ 54.0	0.70	0.58	0.54	0.54	0.54	0.54	0.53	0.55	0.00	0.00	0.00	0.00
γ 55.0	0.66	0.53	0.49	0.50	0.49	0.50	0.48	0.50	0.00	0.00	0.00	0.00
γ 56.0	0.61	0.48	0.45	0.44	0.45	0.45	0.43	0.45	0.00	0.00	0.00	0.00
γ 57.0	0.57	0.44	0.42	0.41	0.41	0.42	0.41	0.42	0.00	0.00	0.00	0.00
γ 58.0	0.54	0.41	0.38	0.38	0.39	0.39	0.39	0.39	0.00	0.00	0.00	0.00
γ 59.0	0.51	0.39	0.37	0.36	0.37	0.36	0.36	0.38	0.00	0.00	0.00	0.00
γ 60.0	0.48	0.37	0.33	0.34	0.34	0.34	0.33	0.35	0.00	0.00	0.00	0.00
γ 61.0	0.46	0.34	0.31	0.32	0.31	0.32	0.30	0.33	0.00	0.00	0.00	0.00
γ 62.0	0.43	0.32	0.29	0.29	0.29	0.30	0.29	0.30	0.00	0.00	0.00	0.00
γ 63.0	0.41	0.30	0.27	0.27	0.27	0.27	0.27	0.29	0.00	0.00	0.00	0.00
γ 64.0	0.39	0.28	0.25	0.25	0.25	0.26	0.26	0.26	0.00	0.00	0.00	0.00
γ 65.0	0.37	0.27	0.23	0.24	0.24	0.25	0.24	0.25	0.00	0.00	0.00	0.00
γ 66.0	0.35	0.25	0.22	0.22	0.22	0.23	0.22	0.23	0.00	0.00	0.00	0.00
γ 67.0	0.34	0.23	0.20	0.20	0.20	0.21	0.20	0.22	0.00	0.00	0.00	0.00
γ 68.0	0.31	0.21	0.19	0.19	0.19	0.19	0.18	0.20	0.00	0.00	0.00	0.00
γ 69.0	0.30	0.20	0.17	0.17	0.17	0.18	0.17	0.19	0.00	0.00	0.00	0.00
γ 70.0	0.28	0.18	0.16	0.16	0.16	0.18	0.16	0.17	0.00	0.00	0.00	0.00
γ 71.0	0.26	0.16	0.14	0.14	0.15	0.15	0.14	0.15	0.00	0.00	0.00	0.00
γ 72.0	0.25	0.15	0.13	0.12	0.13	0.13	0.13	0.15	0.00	0.00	0.00	0.00
γ 73.0	0.23	0.14	0.12	0.11	0.12	0.12	0.12	0.13	0.00	0.00	0.00	0.00
γ 74.0	0.22	0.13	0.11	0.11	0.10	0.11	0.11	0.12	0.00	0.00	0.00	0.00
γ 75.0	0.20	0.11	0.10	0.09	0.09	0.10	0.09	0.11	0.00	0.00	0.00	0.00
γ 76.0	0.18	0.10	0.08	0.08	0.08	0.08	0.08	0.10	0.00	0.00	0.00	0.00
γ 77.0	0.18	0.09	0.06	0.07	0.07	0.07	0.07	0.09	0.00	0.00	0.00	0.00
γ 78.0	0.16	0.08	0.06	0.06	0.06	0.06	0.05	0.08	0.00	0.00	0.00	0.00
γ 79.0	0.14	0.08	0.05	0.04	0.04	0.05	0.05	0.06	0.00	0.00	0.00	0.00
γ 80.0	0.13	0.06	0.03	0.03	0.04	0.03	0.04	0.05	0.00	0.00	0.00	0.00
γ 81.0	0.12	0.05	0.02	0.02	0.02	0.03	0.03	0.02	0.00	0.00	0.00	0.00
γ 82.0	0.12	0.03	0.01	0.01	0.01	0.02	0.02	0.03	0.00	0.00	0.00	0.00
γ 83.0	0.10	0.03	0.00	0.00	0.00	0.00	0.01	0.02	0.00	0.00	0.00	0.00
γ 84.0	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 85.0	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 86.0	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 87.0	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 88.0	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 89.0	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 90.0	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 91.0	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 92.0	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 93.0	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 94.0	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 96.0	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 141.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 147.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 171.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 173.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 174.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 175.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 176.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 177.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 178.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 179.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
V/H	C270.0	C292.5	C315.0	C337.5								
γ 0.0	117.79	117.79	117.79	117.79								
γ 1.0	118.21	118.05	117.71	117.42								
γ 2.0	117.93	117.52	116.90	116.29								
γ 3.0	117.07	116.40	115.53	114.64								
γ 4.0	115.63	114.76	113.63	112.44								
γ 5.0	113.64	112.58	111.21	109.70								

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 6.0	111.15	109.93	108.29	106.56
γ 7.0	108.22	106.86	104.96	103.09
γ 8.0	104.84	103.40	101.31	99.23
γ 9.0	101.07	99.55	97.32	95.01
γ 10.0	96.94	95.35	92.99	90.54
γ 11.0	92.46	90.89	88.37	85.84
γ 12.0	87.76	86.21	83.55	80.94
γ 13.0	82.85	81.32	78.57	75.90
γ 14.0	77.76	76.23	73.47	70.79
γ 15.0	72.58	71.10	68.36	65.64
γ 16.0	67.41	65.93	63.28	60.63
γ 17.0	62.31	60.88	58.30	55.77
γ 18.0	57.32	56.00	53.49	51.06
γ 19.0	52.45	51.17	48.84	46.55
γ 20.0	47.73	46.51	44.41	42.20
γ 21.0	43.24	42.10	40.21	38.13
γ 22.0	39.06	38.00	36.28	34.34
γ 23.0	35.23	34.29	32.63	30.77
γ 24.0	31.72	30.94	29.26	27.45
γ 25.0	28.50	27.82	26.16	24.44
γ 26.0	25.48	24.92	23.33	21.80
γ 27.0	22.64	22.12	20.75	19.29
γ 28.0	20.07	19.60	18.28	16.93
γ 29.0	17.68	17.21	15.91	14.67
γ 30.0	15.48	14.99	13.75	12.66
γ 31.0	13.54	13.01	11.84	10.86
γ 32.0	11.82	11.34	10.23	9.38
γ 33.0	10.33	9.87	8.87	8.11
γ 34.0	8.99	8.57	7.68	7.00
γ 35.0	7.76	7.40	6.64	6.03
γ 36.0	6.63	6.34	5.69	5.18
γ 37.0	5.52	5.33	4.82	4.40
γ 38.0	4.47	4.33	3.99	3.67
γ 39.0	3.51	3.44	3.21	3.01
γ 40.0	2.68	2.68	2.54	2.42
γ 41.0	2.04	2.05	1.99	1.91
γ 42.0	1.54	1.55	1.53	1.50
γ 43.0	1.14	1.17	1.16	1.15
γ 44.0	0.82	0.86	0.85	0.84
γ 45.0	0.59	0.62	0.60	0.61
γ 46.0	0.42	0.45	0.43	0.43
γ 47.0	0.32	0.33	0.32	0.31
γ 48.0	0.22	0.24	0.22	0.22
γ 49.0	0.15	0.17	0.15	0.15
γ 50.0	0.09	0.11	0.09	0.07
γ 51.0	0.03	0.05	0.04	0.02
γ 52.0	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 53.0	0.00	0.00	0.00	0.00
γ 54.0	0.00	0.00	0.00	0.00
γ 55.0	0.00	0.00	0.00	0.00
γ 56.0	0.00	0.00	0.00	0.00
γ 57.0	0.00	0.00	0.00	0.00
γ 58.0	0.00	0.00	0.00	0.00
γ 59.0	0.00	0.00	0.00	0.00
γ 60.0	0.00	0.00	0.00	0.00
γ 61.0	0.00	0.00	0.00	0.00
γ 62.0	0.00	0.00	0.00	0.00
γ 63.0	0.00	0.00	0.00	0.00
γ 64.0	0.00	0.00	0.00	0.00
γ 65.0	0.00	0.00	0.00	0.00
γ 66.0	0.00	0.00	0.00	0.00
γ 67.0	0.00	0.00	0.00	0.00
γ 68.0	0.00	0.00	0.00	0.00
γ 69.0	0.00	0.00	0.00	0.00
γ 70.0	0.00	0.00	0.00	0.00
γ 71.0	0.00	0.00	0.00	0.00
γ 72.0	0.00	0.00	0.00	0.00
γ 73.0	0.00	0.00	0.00	0.00
γ 74.0	0.00	0.00	0.00	0.00
γ 75.0	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00	0.00	0.00
γ 80.0	0.00	0.00	0.00	0.00
γ 81.0	0.00	0.00	0.00	0.00
γ 82.0	0.00	0.00	0.00	0.00
γ 83.0	0.00	0.00	0.00	0.00
γ 84.0	0.00	0.00	0.00	0.00
γ 85.0	0.00	0.00	0.00	0.00
γ 86.0	0.00	0.00	0.00	0.00
γ 87.0	0.00	0.00	0.00	0.00
γ 88.0	0.00	0.00	0.00	0.00
γ 89.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.00	0.00
γ 140.0	0.00	0.00	0.00	0.00
γ 141.0	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD20157-1W-B3535-3090-LDK19.5-36D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 147.0	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.00	0.00
γ 170.0	0.00	0.00	0.00	0.00
γ 171.0	0.00	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.00	0.00
γ 173.0	0.00	0.00	0.00	0.00
γ 174.0	0.00	0.00	0.00	0.00
γ 175.0	0.00	0.00	0.00	0.00
γ 176.0	0.00	0.00	0.00	0.00
γ 177.0	0.00	0.00	0.00	0.00
γ 178.0	0.00	0.00	0.00	0.00
γ 179.0	0.00	0.00	0.00	0.00
γ 180.0	0.00	0.00	0.00	0.00