

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES



Indoor Luminaire Photometric Data

Description Information

Luminary Name:AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Date: 2024/01/04
Manufacture:	Shld. Ang(°):15	Test Machine:GON-2000
Test Lab: Test	Frequency(Hz):50	Lamp CCT(K): 3000 Ra: 90
Lum. Size(W*L*H):0.025m*0.025m*0.000m	Lum. Area(m ²):0.000	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=22.5 γ =1.0	Temp.(°C): 25
		Humidity(%): 50.0

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 39.470	Luminary Flux(lm): 39.469	Field Angle(10%Imax): 36.1(°)	
Rated Power(W): 1	Luminary Efficiency: 100.00%	Down Lumens&Percent: 39.469lm 100.00%	
Rated Voltage(V): 220	Luminary EER(lm/W): 41.989	Up Lumens&Percent: 0.000lm 0.00%	
Tested Power(W): 0.940	Max. Candela(cd): 274.387	S/MH: CO_a180=0.331 C90_270=0.331	
Lamps' Inside: 1	Max Cand@Ang.(°): C=0.0 γ =1.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf):220.1, 0.026, 0.491	Beam Angle(50%Imax): 19.2(°)	ErP Φ use(90°): 38.821lm	
Lamp Size(W*L*H):0.025m*0.025m*0.000m	Left=-9.5°, Right=9.7°	IRF(%): 1407.064	

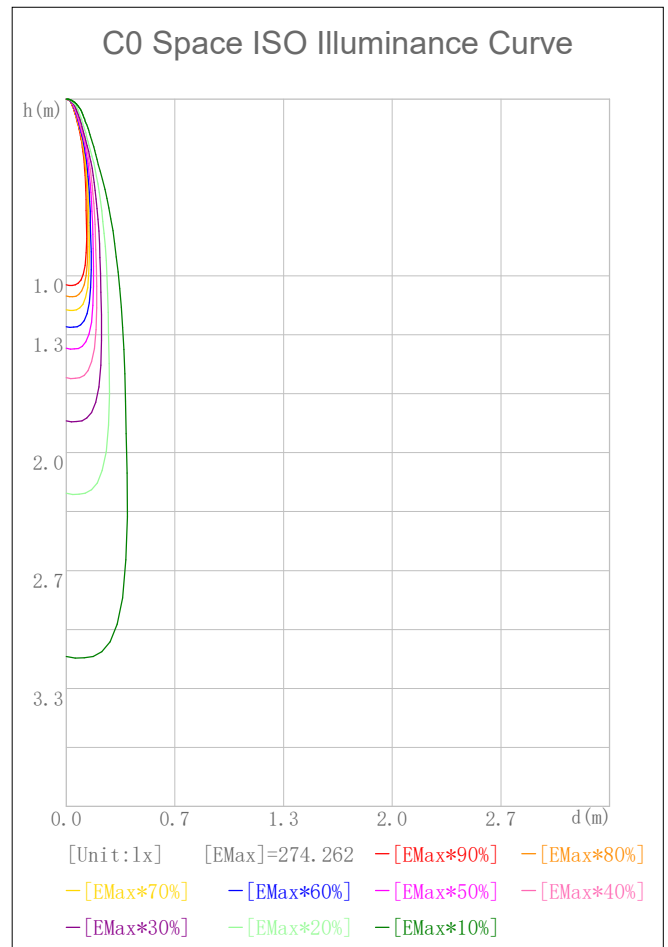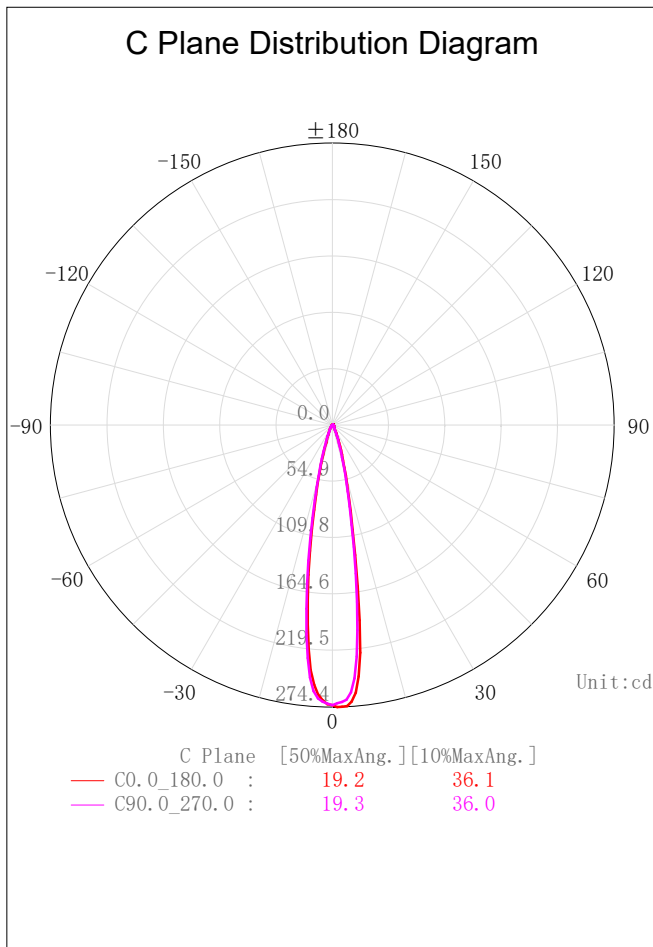



IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

2D Plane Light Intensity Distribution Curve

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

C Plane Distribution Diagram

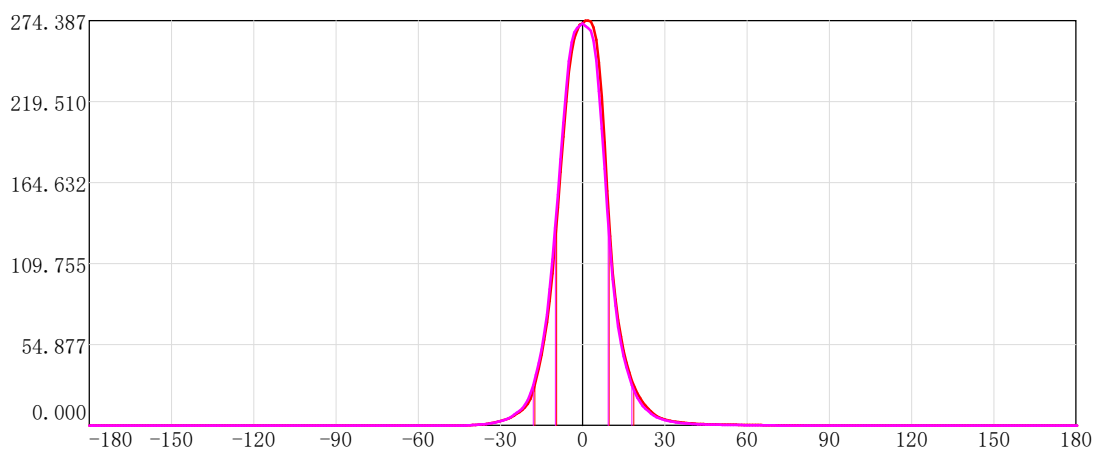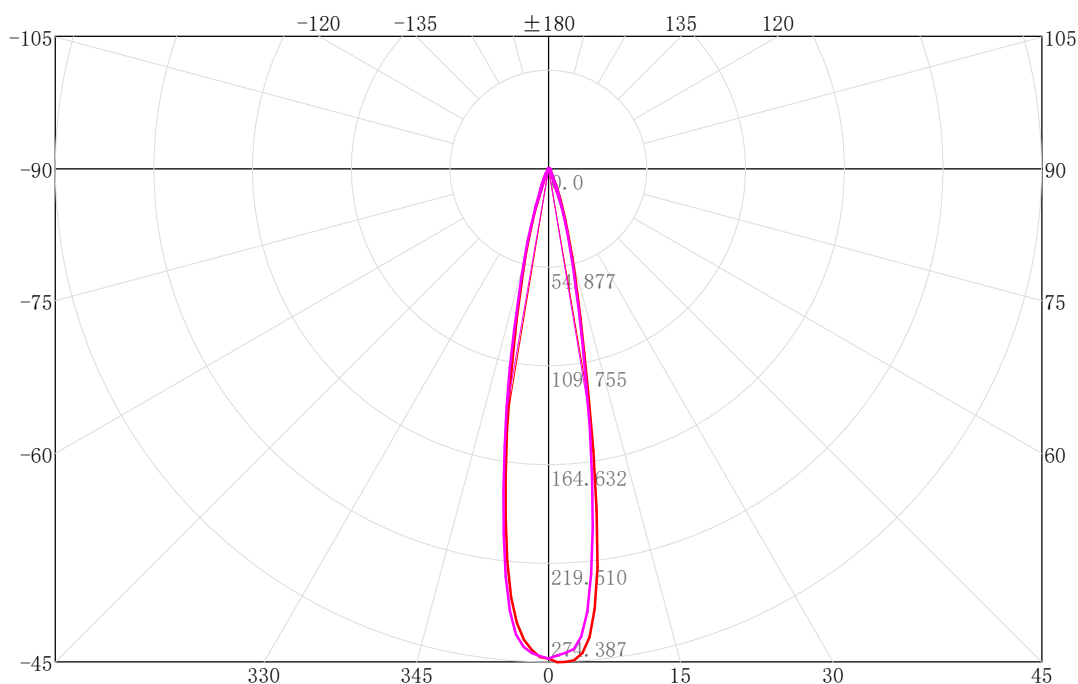

	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
—	C0.0_180.0 :	19.2	36.1	
—	C90.0_270.0 :	19.3	36.0	

IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

3D Light Intensity Distribution Modal

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

3D Light Intensity Distribution Modal



Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.26	0.26	0.66	0.66	47.0-48.0	0.03	39.07	0.07	98.99
1.0-2.0	0.78	1.04	1.97	2.63	48.0-49.0	0.03	39.10	0.07	99.06
2.0-3.0	1.28	2.32	3.25	5.87	49.0-50.0	0.03	39.12	0.06	99.12
3.0-4.0	1.76	4.08	4.46	10.34	50.0-51.0	0.02	39.15	0.06	99.18
4.0-5.0	2.18	6.26	5.53	15.87	51.0-52.0	0.02	39.17	0.06	99.24
5.0-6.0	2.50	8.77	6.35	22.21	52.0-53.0	0.02	39.19	0.06	99.30
6.0-7.0	2.70	11.47	6.84	29.05	53.0-54.0	0.02	39.21	0.05	99.35
7.0-8.0	2.76	14.23	6.99	36.04	54.0-55.0	0.02	39.23	0.05	99.40
8.0-9.0	2.69	16.92	6.83	42.87	55.0-56.0	0.02	39.25	0.05	99.45
9.0-10.0	2.53	19.45	6.41	49.28	56.0-57.0	0.02	39.27	0.05	99.49
10.0-11.0	2.31	21.76	5.85	55.14	57.0-58.0	0.02	39.29	0.04	99.54
11.0-12.0	2.07	23.84	5.25	60.39	58.0-59.0	0.02	39.30	0.04	99.58
12.0-13.0	1.85	25.69	4.69	65.08	59.0-60.0	0.02	39.32	0.04	99.62
13.0-14.0	1.66	27.35	4.20	69.28	60.0-61.0	0.01	39.33	0.04	99.65
14.0-15.0	1.48	28.83	3.75	73.03	61.0-62.0	0.01	39.35	0.03	99.69
15.0-16.0	1.31	30.14	3.32	76.35	62.0-63.0	0.01	39.36	0.03	99.72
16.0-17.0	1.14	31.28	2.90	79.25	63.0-64.0	0.01	39.37	0.03	99.75
17.0-18.0	0.99	32.27	2.50	81.75	64.0-65.0	0.01	39.38	0.03	99.78
18.0-19.0	0.85	33.12	2.15	83.90	65.0-66.0	0.01	39.39	0.03	99.80
19.0-20.0	0.73	33.85	1.86	85.76	66.0-67.0	0.01	39.40	0.02	99.83
20.0-21.0	0.64	34.49	1.62	87.38	67.0-68.0	0.01	39.41	0.02	99.85
21.0-22.0	0.56	35.05	1.43	88.81	68.0-69.0	0.01	39.42	0.02	99.87
22.0-23.0	0.50	35.55	1.26	90.07	69.0-70.0	0.01	39.43	0.02	99.89
23.0-24.0	0.44	36.00	1.13	91.20	70.0-71.0	0.01	39.43	0.02	99.91
24.0-25.0	0.39	36.39	0.99	92.19	71.0-72.0	0.01	39.44	0.01	99.92
25.0-26.0	0.34	36.73	0.86	93.05	72.0-73.0	0.01	39.44	0.01	99.93
26.0-27.0	0.29	37.02	0.74	93.79	73.0-74.0	0.00	39.45	0.01	99.95
27.0-28.0	0.26	37.28	0.65	94.44	74.0-75.0	0.00	39.45	0.01	99.96
28.0-29.0	0.23	37.50	0.58	95.02	75.0-76.0	0.00	39.46	0.01	99.97
29.0-30.0	0.20	37.71	0.51	95.53	76.0-77.0	0.00	39.46	0.01	99.97
30.0-31.0	0.18	37.88	0.45	95.98	77.0-78.0	0.00	39.46	0.01	99.98
31.0-32.0	0.16	38.04	0.40	96.38	78.0-79.0	0.00	39.46	0.00	99.98
32.0-33.0	0.14	38.18	0.35	96.73	79.0-80.0	0.00	39.46	0.00	99.99
33.0-34.0	0.12	38.30	0.31	97.03	80.0-81.0	0.00	39.47	0.00	99.99
34.0-35.0	0.11	38.41	0.27	97.30	81.0-82.0	0.00	39.47	0.00	99.99
35.0-36.0	0.09	38.50	0.24	97.54	82.0-83.0	0.00	39.47	0.00	99.99
36.0-37.0	0.08	38.58	0.21	97.76	83.0-84.0	0.00	39.47	0.00	99.99
37.0-38.0	0.08	38.66	0.19	97.95	84.0-85.0	0.00	39.47	0.00	99.99
38.0-39.0	0.07	38.73	0.17	98.12	85.0-86.0	0.00	39.47	0.00	100.00
39.0-40.0	0.06	38.79	0.15	98.27	86.0-87.0	0.00	39.47	0.00	100.00
40.0-41.0	0.05	38.84	0.13	98.40	87.0-88.0	0.00	39.47	0.00	100.00
41.0-42.0	0.05	38.88	0.11	98.51	88.0-89.0	0.00	39.47	0.00	100.00
42.0-43.0	0.04	38.92	0.10	98.61	89.0-90.0	0.00	39.47	0.00	100.00
43.0-44.0	0.03	38.96	0.09	98.70	90.0-91.0	0.00	39.47	0.00	100.00
44.0-45.0	0.03	38.99	0.08	98.78	91.0-92.0	0.00	39.47	0.00	100.00
45.0-46.0	0.03	39.02	0.07	98.85	92.0-93.0	0.00	39.47	0.00	100.00
46.0-47.0	0.03	39.04	0.07	98.92	93.0-94.0	0.00	39.47	0.00	100.00

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Zonal Flux Tabulation - (Cont.)


Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	39.47	0.00	100.00	141.0-142.0	0.00	39.47	0.00	100.00
95.0-96.0	0.00	39.47	0.00	100.00	142.0-143.0	0.00	39.47	0.00	100.00
96.0-97.0	0.00	39.47	0.00	100.00	143.0-144.0	0.00	39.47	0.00	100.00
97.0-98.0	0.00	39.47	0.00	100.00	144.0-145.0	0.00	39.47	0.00	100.00
98.0-99.0	0.00	39.47	0.00	100.00	145.0-146.0	0.00	39.47	0.00	100.00
99.0-100.0	0.00	39.47	0.00	100.00	146.0-147.0	0.00	39.47	0.00	100.00
100.0-101.0	0.00	39.47	0.00	100.00	147.0-148.0	0.00	39.47	0.00	100.00
101.0-102.0	0.00	39.47	0.00	100.00	148.0-149.0	0.00	39.47	0.00	100.00
102.0-103.0	0.00	39.47	0.00	100.00	149.0-150.0	0.00	39.47	0.00	100.00
103.0-104.0	0.00	39.47	0.00	100.00	150.0-151.0	0.00	39.47	0.00	100.00
104.0-105.0	0.00	39.47	0.00	100.00	151.0-152.0	0.00	39.47	0.00	100.00
105.0-106.0	0.00	39.47	0.00	100.00	152.0-153.0	0.00	39.47	0.00	100.00
106.0-107.0	0.00	39.47	0.00	100.00	153.0-154.0	0.00	39.47	0.00	100.00
107.0-108.0	0.00	39.47	0.00	100.00	154.0-155.0	0.00	39.47	0.00	100.00
108.0-109.0	0.00	39.47	0.00	100.00	155.0-156.0	0.00	39.47	0.00	100.00
109.0-110.0	0.00	39.47	0.00	100.00	156.0-157.0	0.00	39.47	0.00	100.00
110.0-111.0	0.00	39.47	0.00	100.00	157.0-158.0	0.00	39.47	0.00	100.00
111.0-112.0	0.00	39.47	0.00	100.00	158.0-159.0	0.00	39.47	0.00	100.00
112.0-113.0	0.00	39.47	0.00	100.00	159.0-160.0	0.00	39.47	0.00	100.00
113.0-114.0	0.00	39.47	0.00	100.00	160.0-161.0	0.00	39.47	0.00	100.00
114.0-115.0	0.00	39.47	0.00	100.00	161.0-162.0	0.00	39.47	0.00	100.00
115.0-116.0	0.00	39.47	0.00	100.00	162.0-163.0	0.00	39.47	0.00	100.00
116.0-117.0	0.00	39.47	0.00	100.00	163.0-164.0	0.00	39.47	0.00	100.00
117.0-118.0	0.00	39.47	0.00	100.00	164.0-165.0	0.00	39.47	0.00	100.00
118.0-119.0	0.00	39.47	0.00	100.00	165.0-166.0	0.00	39.47	0.00	100.00
119.0-120.0	0.00	39.47	0.00	100.00	166.0-167.0	0.00	39.47	0.00	100.00
120.0-121.0	0.00	39.47	0.00	100.00	167.0-168.0	0.00	39.47	0.00	100.00
121.0-122.0	0.00	39.47	0.00	100.00	168.0-169.0	0.00	39.47	0.00	100.00
122.0-123.0	0.00	39.47	0.00	100.00	169.0-170.0	0.00	39.47	0.00	100.00
123.0-124.0	0.00	39.47	0.00	100.00	170.0-171.0	0.00	39.47	0.00	100.00
124.0-125.0	0.00	39.47	0.00	100.00	171.0-172.0	0.00	39.47	0.00	100.00
125.0-126.0	0.00	39.47	0.00	100.00	172.0-173.0	0.00	39.47	0.00	100.00
126.0-127.0	0.00	39.47	0.00	100.00	173.0-174.0	0.00	39.47	0.00	100.00
127.0-128.0	0.00	39.47	0.00	100.00	174.0-175.0	0.00	39.47	0.00	100.00
128.0-129.0	0.00	39.47	0.00	100.00	175.0-176.0	0.00	39.47	0.00	100.00
129.0-130.0	0.00	39.47	0.00	100.00	176.0-177.0	0.00	39.47	0.00	100.00
130.0-131.0	0.00	39.47	0.00	100.00	177.0-178.0	0.00	39.47	0.00	100.00
131.0-132.0	0.00	39.47	0.00	100.00	178.0-179.0	0.00	39.47	0.00	100.00
132.0-133.0	0.00	39.47	0.00	100.00	179.0-180.0	0.00	39.47	0.00	100.00
133.0-134.0	0.00	39.47	0.00	100.00					
134.0-135.0	0.00	39.47	0.00	100.00					
135.0-136.0	0.00	39.47	0.00	100.00					
136.0-137.0	0.00	39.47	0.00	100.00					
137.0-138.0	0.00	39.47	0.00	100.00					
138.0-139.0	0.00	39.47	0.00	100.00					
139.0-140.0	0.00	39.47	0.00	100.00					
140.0-141.0	0.00	39.47	0.00	100.00					

IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

Rectangle ISO Lighting Intensity Diagram

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

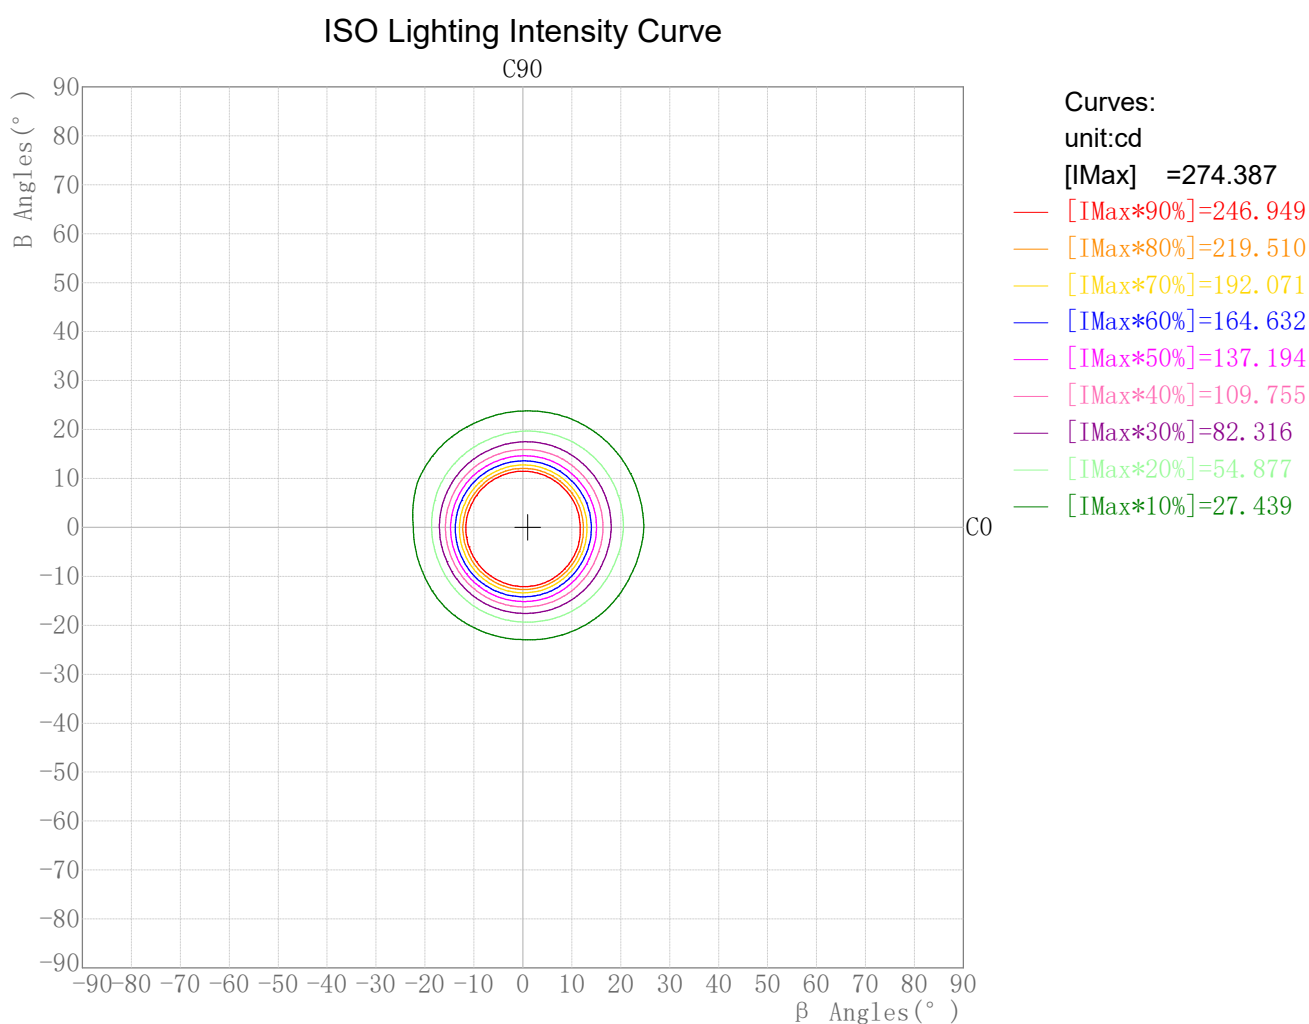


IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

Round ISO Lighting Intensity Diagram

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

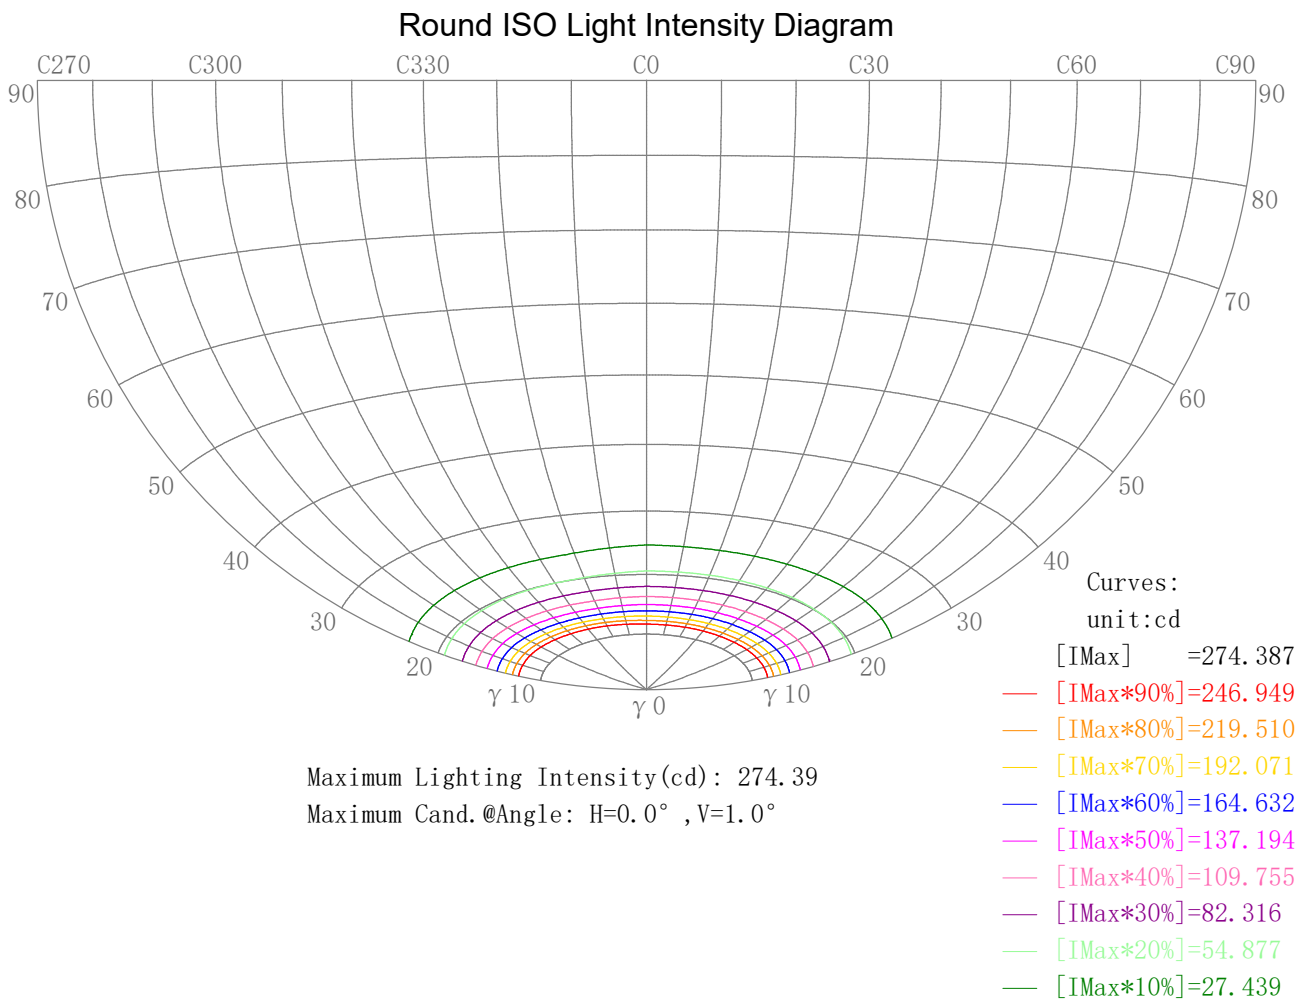


IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

Plane ISO-Illuminance Diagram

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

Plane ISO-Illuminance Curve

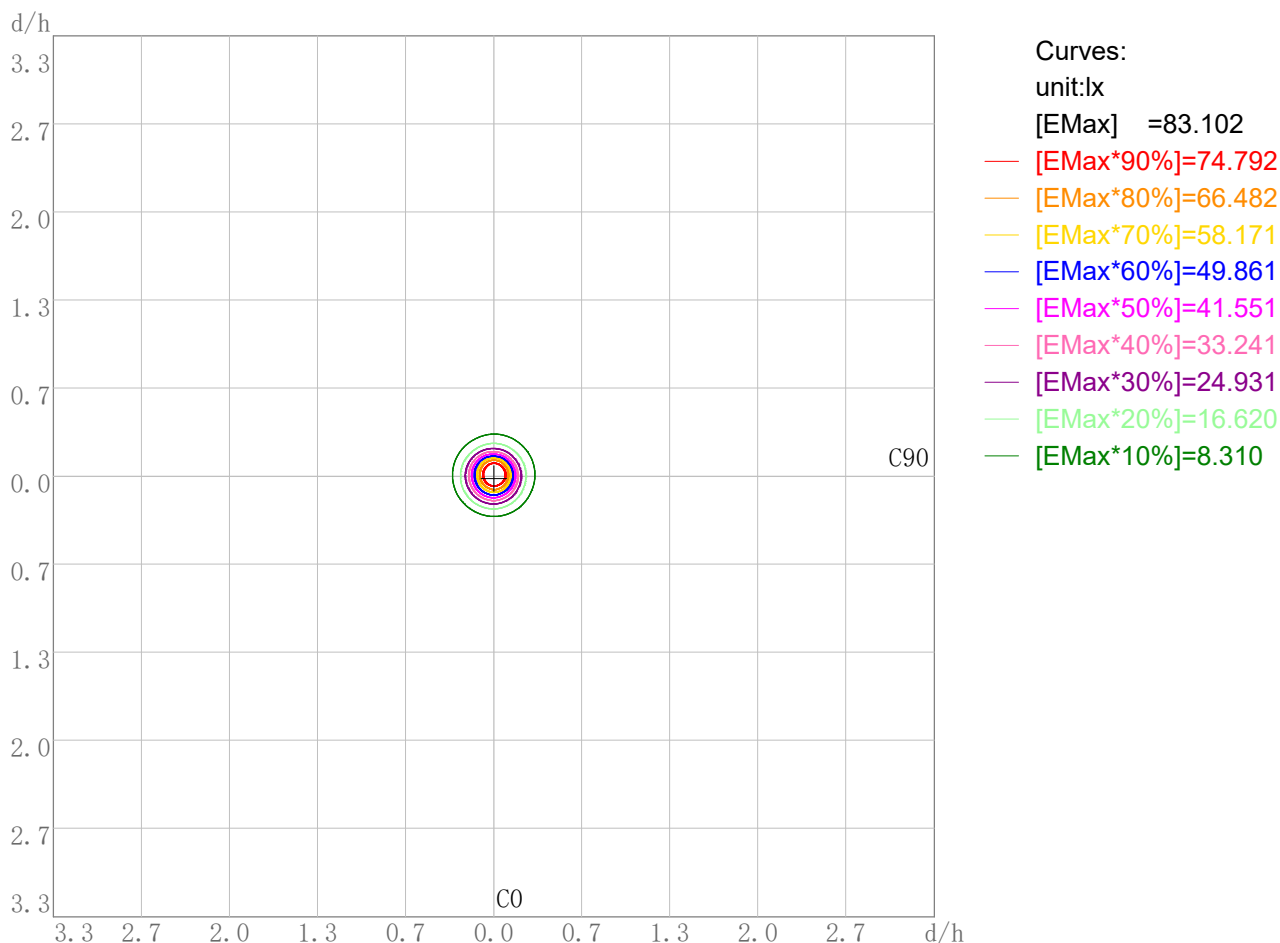

Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 83.10
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

3D Plane ISO Illuminance Diagram

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

3D Plane Illuminance Modal



Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0


IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

Space ISO Illuminance Diagram

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

Space ISO Illuminance Curve

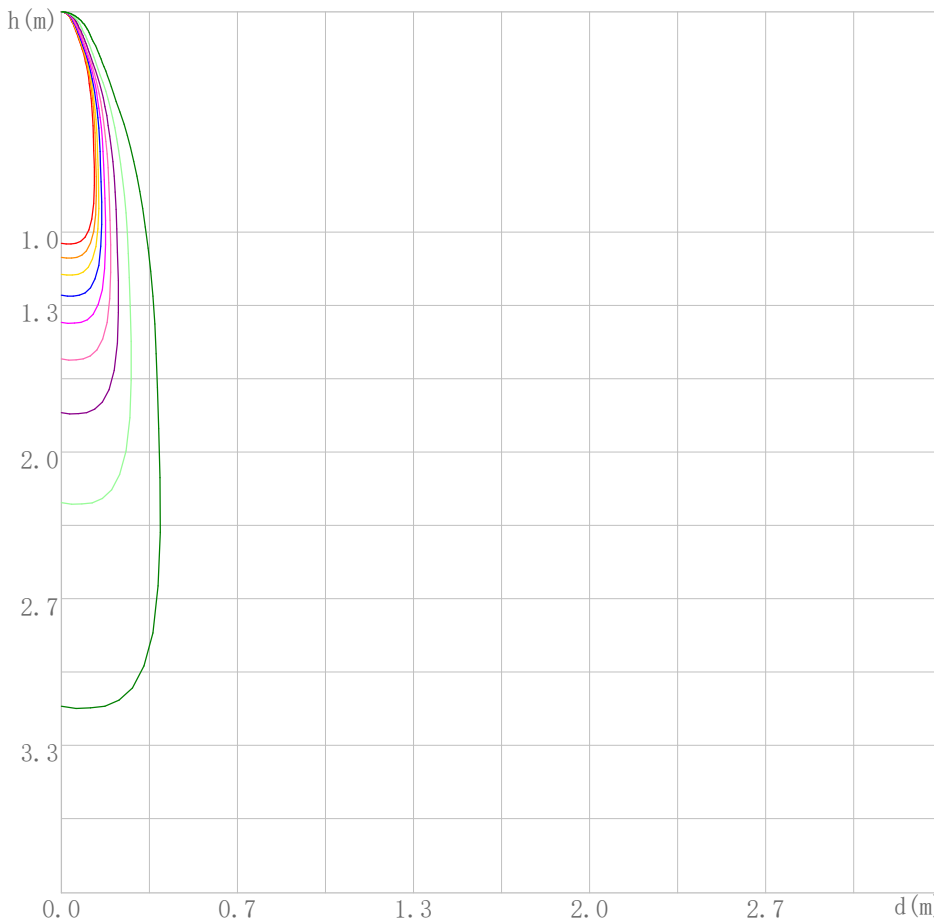

- Curves:
[Unit: lx]
[EMax] =274.262
- [EMax*90%]=246.836
 - [EMax*80%]=219.410
 - [EMax*70%]=191.983
 - [EMax*60%]=164.557
 - [EMax*50%]=137.131
 - [EMax*40%]=109.705
 - [EMax*30%]=82.279
 - [EMax*20%]=54.852
 - [EMax*10%]=27.426

Space Plane Maximum Illuminance and @Angle:274.26lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:274.387cd,0deg


IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

Illuminance-Distance Diagram

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

Illuminance-Distance Curve

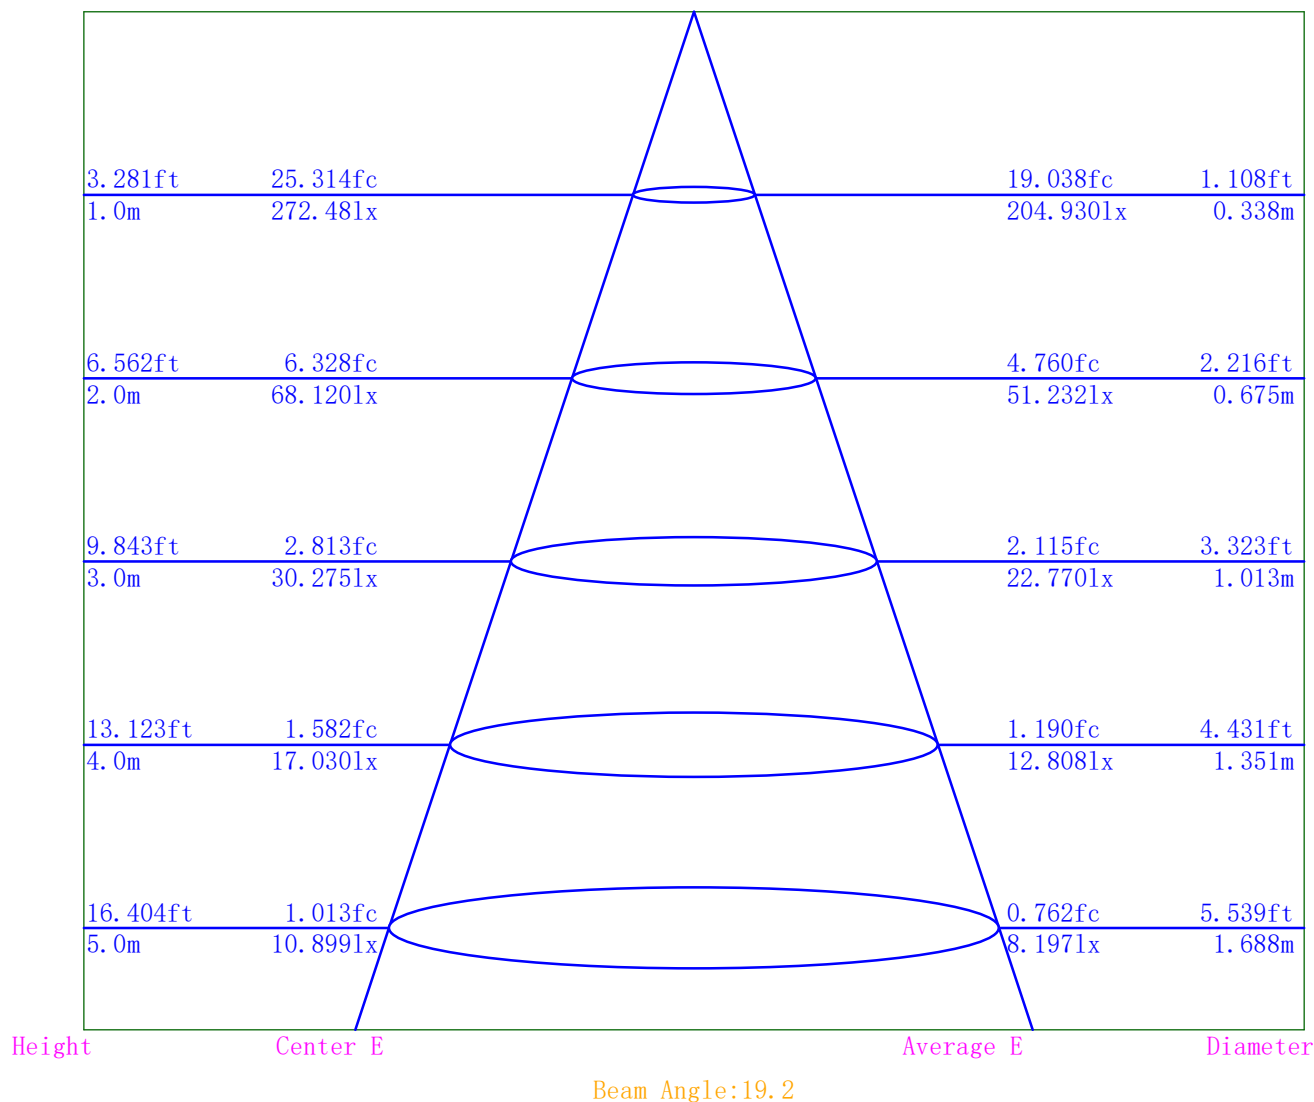

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Indoor Luminance Limiting Curves

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2024/01/04


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	2764	2358	2036	1788	1609	1474	1348	1381	1526
C90	2129	1762	1444	1149	930	664	346	0	0

Luminance Limiting Curve

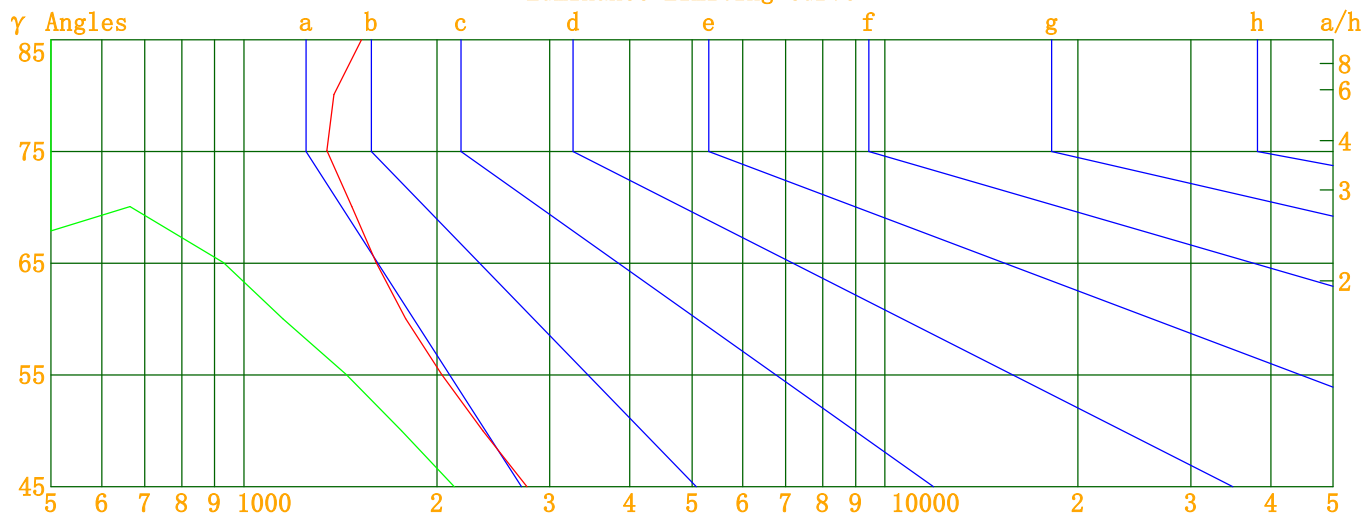


Luminous Size: Length(m)=-0.025 Width(m)=-0.025 Height(m)=0.000 Area(m^2)=0.000491
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —

IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

Indoor Budgetary Estimate Table

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

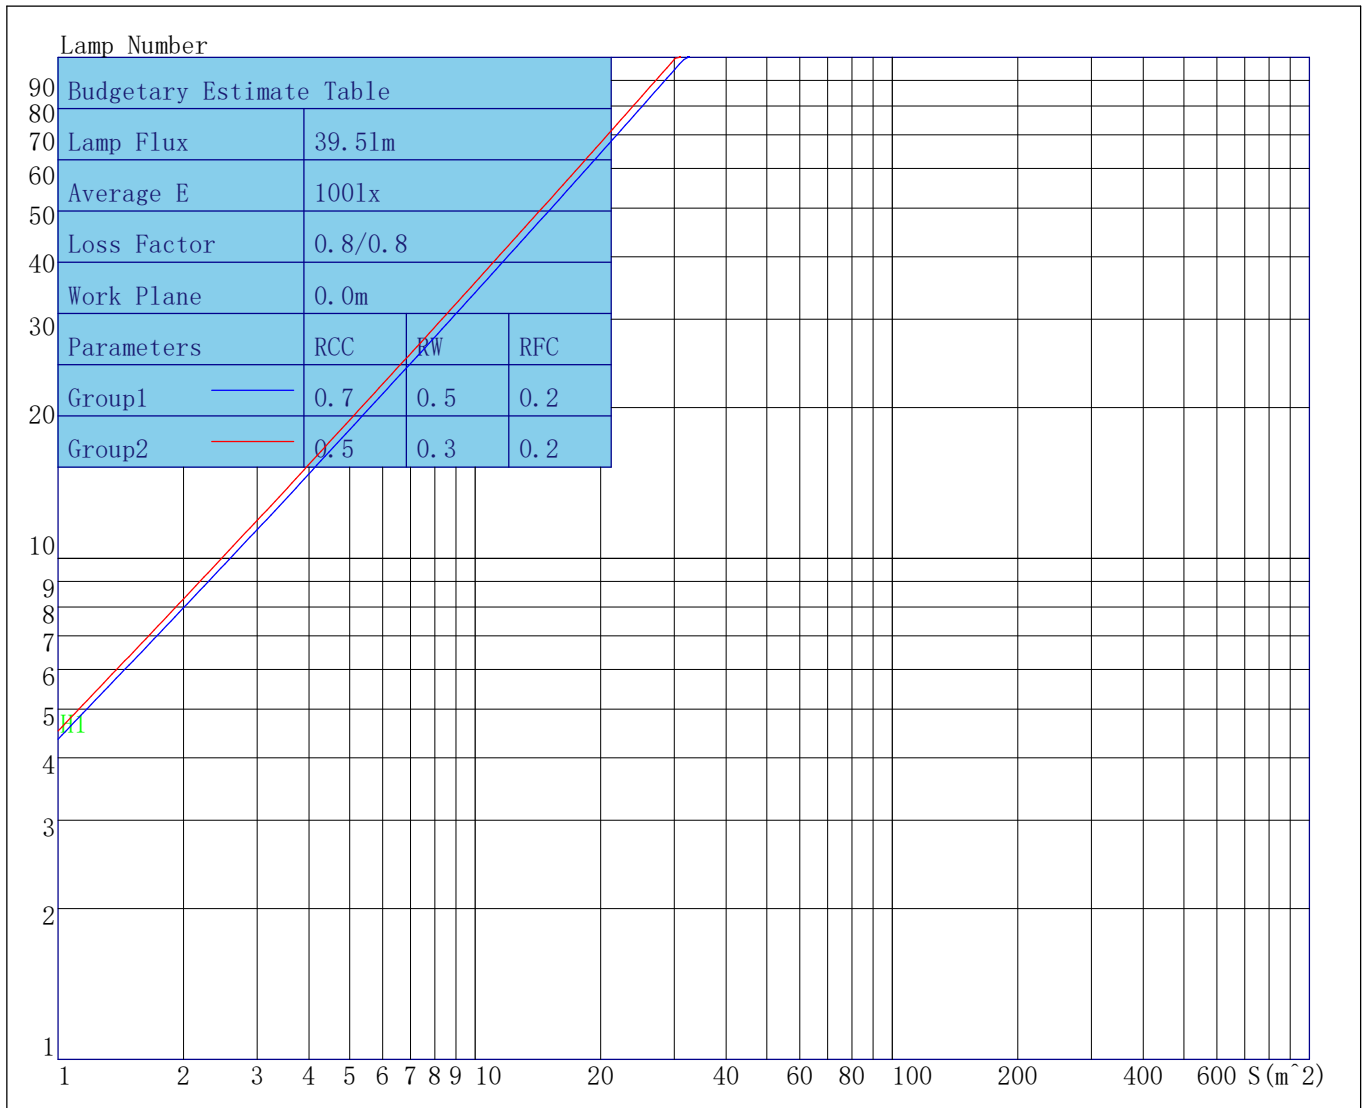

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
 Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
 Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

Indoor Coefficient of Utilization Table

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

Coefficients of Utilization - Zonal Cavity Method																					
Coef.	Effective Floor Cavity Reflectance RFC=0.20																				
RhoCC (%)	80				70				50				30				10				0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization (%)																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97			
2	112	109	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95			
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	96	95	93	92			
4	106	101	97	95	104	100	97	94	98	95	93	96	94	92	95	93	91	90			
5	103	98	94	91	102	97	94	91	96	93	90	94	92	90	93	91	89	88			
6	101	95	91	89	100	95	91	88	93	90	88	92	89	87	91	89	87	86			
7	98	93	89	86	97	92	89	86	91	88	86	90	87	85	89	87	85	84			
8	96	90	87	84	95	90	87	84	89	86	84	88	86	84	88	85	83	82			
9	94	88	85	82	94	88	85	82	87	84	82	87	84	82	86	83	82	81			
10	92	87	83	81	92	86	83	81	86	83	80	85	82	80	84	82	80	79			

IES Indoor Report

Photometric Filename: **AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES**

Unified Glare Rating Table

Lum. Name: AD21240	Lum. Catalog: Downlight	Test ID:
Lamp Name: B3535	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2024/01/04

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	5.9	6.8	6.3	7.1	7.4	6.2	7.1	6.5	7.4	7.7
	Y=3H	6.6	7.4	7.0	7.8	8.1	6.4	7.2	6.8	7.6	7.9
	Y=4H	7.0	7.7	7.4	8.1	8.5	6.4	7.2	6.8	7.5	7.9
	Y=6H	7.4	8.0	7.8	8.4	8.8	6.3	7.0	6.7	7.4	7.8
	Y=8H	7.5	8.2	8.0	8.6	9.0	6.3	6.9	6.7	7.3	7.7
	Y=12H	7.7	8.3	8.1	8.7	9.1	6.2	6.8	6.6	7.2	7.6
X=4H	Y=2H	5.8	6.5	6.2	6.9	7.3	6.3	7.0	6.7	7.3	7.7
	Y=3H	6.6	7.2	7.0	7.6	8.0	6.6	7.2	7.0	7.6	8.0
	Y=4H	7.0	7.5	7.4	7.9	8.4	6.6	7.1	7.0	7.6	8.0
	Y=6H	7.4	7.8	7.9	8.3	8.8	6.5	7.0	7.0	7.4	7.9
	Y=8H	7.6	8.0	8.0	8.4	8.9	6.4	6.8	6.9	7.3	7.8
	Y=12H	7.8	8.2	8.3	8.6	9.1	6.4	6.7	6.8	7.2	7.7
X=8H	Y=4H	6.8	7.2	7.3	7.7	8.2	6.5	6.9	7.0	7.4	7.8
	Y=6H	7.2	7.6	7.7	8.1	8.6	6.4	6.7	6.9	7.2	7.7
	Y=8H	7.4	7.7	7.9	8.2	8.7	6.3	6.6	6.8	7.1	7.6
	Y=12H	7.7	7.9	8.2	8.4	9.0	6.2	6.5	6.8	7.0	7.6
X=12H	Y=4H	6.7	7.1	7.2	7.6	8.1	6.4	6.8	6.9	7.3	7.8
	Y=6H	7.2	7.5	7.7	7.9	8.5	6.3	6.6	6.8	7.1	7.6
	Y=8H	7.4	7.6	7.9	8.1	8.7	6.2	6.5	6.8	7.0	7.6
Variations with the objerver position at spacings											
S=1.0H	0.4/-0.4					3.1/-7.8					
S=1.5H	1.2/-0.8					2.9/-6.6					
S=2.0H	2.5/-1.8					3.2/-6.4					
Reduced UGR Table:											
Nordic Standard Table:	BKO					BKO					
Correction Value	1.5					0.6					

o the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Candela Tabulation

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 0.0	272.48	272.48	272.48	272.48	272.48	272.48	272.48	272.48	272.48	272.48	272.48	272.48
γ 1.0	274.39	273.08	272.60	271.13	270.72	270.16	269.77	270.02	271.64	271.29	271.60	271.22
γ 2.0	274.33	272.53	270.97	270.74	269.42	267.52	266.46	265.79	267.71	268.15	269.35	269.12
γ 3.0	273.68	271.45	270.36	269.46	267.51	264.99	261.89	259.84	262.25	263.05	264.54	265.44
γ 4.0	269.84	266.99	265.12	263.59	260.86	257.51	253.54	250.96	253.18	253.00	255.11	256.96
γ 5.0	261.42	258.42	254.70	251.86	247.32	242.41	238.96	236.31	239.31	236.08	238.90	242.49
γ 6.0	245.96	244.19	237.74	233.16	226.49	220.34	218.20	215.99	219.50	214.89	217.67	222.33
γ 7.0	223.10	222.04	213.95	207.62	201.07	195.27	192.84	191.30	195.67	193.01	195.62	199.27
γ 8.0	191.79	192.43	184.24	179.13	174.03	168.09	166.61	166.04	171.81	171.04	173.82	175.94
γ 9.0	158.94	158.81	153.47	149.32	146.28	142.49	142.02	142.16	147.63	148.27	151.47	152.77
γ 10.0	128.49	127.36	124.11	121.99	120.45	118.42	119.41	119.86	124.48	124.84	127.64	129.63
γ 11.0	103.78	102.55	99.64	99.39	99.02	97.66	98.55	99.35	102.95	102.96	105.39	108.19
γ 12.0	85.37	84.25	81.82	81.49	81.18	80.19	80.48	81.62	84.42	85.01	87.22	89.26
γ 13.0	71.49	70.42	68.29	67.74	66.70	65.90	66.65	67.60	69.96	70.82	72.80	74.22
γ 14.0	60.28	59.29	57.37	56.90	55.82	55.01	55.86	56.48	58.19	58.73	60.56	61.62
γ 15.0	50.75	50.02	48.43	48.10	47.06	45.89	46.43	46.70	47.96	47.83	49.39	50.75
γ 16.0	42.81	42.16	40.93	40.57	39.49	38.01	38.08	38.08	38.68	38.18	39.54	41.07
γ 17.0	36.07	35.48	34.52	34.06	32.97	31.20	30.76	30.40	30.55	29.87	31.16	32.83
γ 18.0	30.44	29.98	29.14	28.47	27.32	25.31	24.77	24.13	23.47	22.82	23.95	25.74
γ 19.0	25.85	25.54	24.75	23.85	22.57	20.78	20.23	19.56	18.11	17.62	18.53	20.03
γ 20.0	22.00	21.80	21.00	20.03	18.77	17.35	16.79	16.21	14.66	14.33	15.04	16.05
γ 21.0	18.71	18.45	17.70	16.80	15.74	14.59	14.14	13.73	12.29	12.13	12.68	13.23
γ 22.0	15.82	15.51	14.82	14.11	13.32	12.39	12.12	11.93	10.56	10.50	10.93	11.18
γ 23.0	13.34	13.00	12.42	11.96	11.35	10.63	10.59	10.52	9.21	9.16	9.53	9.64
γ 24.0	11.30	10.93	10.53	10.27	9.68	9.16	9.13	9.10	8.01	7.89	8.30	8.38
γ 25.0	9.59	9.18	8.90	8.58	8.10	7.61	7.66	7.65	6.68	6.56	6.92	7.08
γ 26.0	7.81	7.56	7.26	6.99	6.69	6.41	6.52	6.59	5.54	5.47	5.75	5.76
γ 27.0	6.43	6.19	5.96	5.82	5.68	5.55	5.68	5.78	4.81	4.73	4.93	4.92
γ 28.0	5.46	5.22	5.05	4.98	4.93	4.87	4.99	5.11	4.18	4.11	4.27	4.23
γ 29.0	4.74	4.47	4.37	4.33	4.32	4.25	4.37	4.47	3.59	3.54	3.68	3.61
γ 30.0	4.17	3.86	3.78	3.79	3.77	3.70	3.80	3.88	3.05	2.98	3.10	3.03
γ 31.0	3.68	3.35	3.27	3.32	3.29	3.22	3.30	3.36	2.54	2.46	2.55	2.51
γ 32.0	3.26	2.92	2.84	2.91	2.87	2.80	2.84	2.90	2.11	2.02	2.05	2.05
γ 33.0	2.88	2.56	2.48	2.56	2.50	2.43	2.47	2.50	1.73	1.65	1.64	1.65
γ 34.0	2.56	2.26	2.20	2.26	2.20	2.14	2.16	2.17	1.41	1.34	1.31	1.32
γ 35.0	2.29	2.03	1.97	2.02	1.96	1.89	1.89	1.90	1.16	1.09	1.06	1.10
γ 36.0	2.08	1.84	1.79	1.82	1.76	1.70	1.68	1.67	0.94	0.89	0.86	0.90
γ 37.0	1.91	1.67	1.62	1.64	1.58	1.53	1.49	1.48	0.76	0.71	0.69	0.73
γ 38.0	1.73	1.51	1.49	1.48	1.42	1.36	1.32	1.30	0.60	0.55	0.55	0.58
γ 39.0	1.58	1.38	1.36	1.34	1.28	1.24	1.20	1.17	0.46	0.41	0.42	0.44
γ 40.0	1.45	1.26	1.24	1.22	1.16	1.12	1.09	1.05	0.34	0.31	0.31	0.34
γ 41.0	1.32	1.15	1.12	1.10	1.05	1.00	0.98	0.95	0.23	0.20	0.22	0.23
γ 42.0	1.19	1.02	0.99	0.98	0.93	0.89	0.88	0.87	0.13	0.11	0.11	0.13
γ 43.0	1.09	0.91	0.88	0.87	0.85	0.83	0.82	0.81	0.06	0.04	0.04	0.05
γ 44.0	1.02	0.86	0.81	0.81	0.79	0.77	0.77	0.76	0.01	0.00	0.00	0.00
γ 45.0	0.96	0.81	0.76	0.76	0.74	0.72	0.72	0.72	0.00	0.00	0.00	0.00
γ 46.0	0.90	0.77	0.72	0.71	0.70	0.69	0.68	0.68	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 47.0	0.86	0.73	0.68	0.67	0.65	0.65	0.65	0.64	0.00	0.00	0.00	0.00
γ 48.0	0.82	0.68	0.64	0.63	0.62	0.62	0.61	0.61	0.00	0.00	0.00	0.00
γ 49.0	0.78	0.64	0.60	0.60	0.59	0.58	0.57	0.58	0.00	0.00	0.00	0.00
γ 50.0	0.74	0.61	0.58	0.57	0.56	0.54	0.54	0.53	0.00	0.00	0.00	0.00
γ 51.0	0.70	0.58	0.54	0.54	0.53	0.53	0.51	0.51	0.00	0.00	0.00	0.00
γ 52.0	0.67	0.55	0.51	0.50	0.49	0.49	0.48	0.48	0.00	0.00	0.00	0.00
γ 53.0	0.64	0.52	0.48	0.47	0.46	0.46	0.45	0.45	0.00	0.00	0.00	0.00
γ 54.0	0.60	0.48	0.44	0.44	0.44	0.44	0.42	0.42	0.00	0.00	0.00	0.00
γ 55.0	0.57	0.45	0.43	0.41	0.41	0.41	0.40	0.40	0.00	0.00	0.00	0.00
γ 56.0	0.55	0.42	0.40	0.38	0.38	0.38	0.38	0.37	0.00	0.00	0.00	0.00
γ 57.0	0.53	0.40	0.37	0.36	0.35	0.36	0.35	0.35	0.00	0.00	0.00	0.00
γ 58.0	0.49	0.38	0.35	0.33	0.33	0.34	0.34	0.32	0.00	0.00	0.00	0.00
γ 59.0	0.46	0.35	0.32	0.30	0.30	0.30	0.32	0.30	0.00	0.00	0.00	0.00
γ 60.0	0.44	0.33	0.30	0.29	0.28	0.29	0.29	0.28	0.00	0.00	0.00	0.00
γ 61.0	0.41	0.31	0.28	0.27	0.26	0.27	0.27	0.26	0.00	0.00	0.00	0.00
γ 62.0	0.39	0.28	0.26	0.25	0.25	0.26	0.25	0.24	0.00	0.00	0.00	0.00
γ 63.0	0.37	0.26	0.25	0.23	0.23	0.23	0.23	0.22	0.00	0.00	0.00	0.00
γ 64.0	0.35	0.24	0.22	0.21	0.21	0.22	0.21	0.21	0.00	0.00	0.00	0.00
γ 65.0	0.33	0.22	0.21	0.20	0.19	0.20	0.19	0.19	0.00	0.00	0.00	0.00
γ 66.0	0.32	0.20	0.18	0.18	0.18	0.18	0.17	0.18	0.00	0.00	0.00	0.00
γ 67.0	0.30	0.19	0.17	0.16	0.16	0.16	0.16	0.17	0.00	0.00	0.00	0.00
γ 68.0	0.28	0.18	0.15	0.15	0.14	0.14	0.14	0.14	0.00	0.00	0.00	0.00
γ 69.0	0.26	0.16	0.13	0.13	0.13	0.13	0.13	0.12	0.00	0.00	0.00	0.00
γ 70.0	0.25	0.15	0.11	0.11	0.11	0.13	0.12	0.11	0.00	0.00	0.00	0.00
γ 71.0	0.22	0.14	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00	0.00	0.00
γ 72.0	0.22	0.13	0.08	0.09	0.08	0.08	0.08	0.09	0.00	0.00	0.00	0.00
γ 73.0	0.20	0.12	0.07	0.07	0.07	0.07	0.07	0.08	0.00	0.00	0.00	0.00
γ 74.0	0.18	0.10	0.06	0.06	0.06	0.07	0.07	0.06	0.00	0.00	0.00	0.00
γ 75.0	0.17	0.08	0.05	0.06	0.04	0.05	0.06	0.05	0.00	0.00	0.00	0.00
γ 76.0	0.16	0.07	0.04	0.04	0.03	0.03	0.04	0.04	0.00	0.00	0.00	0.00
γ 77.0	0.15	0.06	0.03	0.02	0.02	0.03	0.03	0.03	0.00	0.00	0.00	0.00
γ 78.0	0.14	0.05	0.02	0.02	0.00	0.01	0.02	0.02	0.00	0.00	0.00	0.00
γ 79.0	0.12	0.04	0.02	0.01	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00
γ 80.0	0.12	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 81.0	0.11	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 82.0	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 83.0	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 84.0	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 85.0	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 86.0	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 87.0	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 88.0	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 89.0	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 90.0	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 91.0	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 94.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 141.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 147.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 171.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 173.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 174.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 175.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 176.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 177.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 178.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 179.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
V/H	C270.0	C292.5	C315.0	C337.5								
γ 0.0	272.48	272.48	272.48	272.48								
γ 1.0	270.96	270.84	271.47	272.24								
γ 2.0	269.37	269.27	270.10	271.27								
γ 3.0	266.26	266.20	267.48	269.74								
γ 4.0	259.57	260.99	263.06	266.32								
γ 5.0	246.74	250.72	254.68	259.13								

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 6.0	227.89	235.00	240.96	245.53
γ 7.0	205.11	213.94	220.09	224.03
γ 8.0	180.50	189.00	194.04	196.26
γ 9.0	156.46	162.59	165.80	166.18
γ 10.0	133.91	137.65	137.29	135.86
γ 11.0	112.49	114.36	111.48	109.67
γ 12.0	92.37	93.14	90.80	88.86
γ 13.0	75.37	75.63	74.10	72.66
γ 14.0	62.30	62.43	60.70	59.82
γ 15.0	51.69	52.03	50.64	49.78
γ 16.0	42.32	42.92	42.27	41.74
γ 17.0	34.19	35.07	35.10	34.99
γ 18.0	27.26	28.56	29.08	29.25
γ 19.0	21.62	23.02	23.90	24.33
γ 20.0	17.35	18.67	19.61	20.32
γ 21.0	14.14	15.37	16.20	17.05
γ 22.0	11.73	12.76	13.47	14.28
γ 23.0	9.95	10.66	11.28	11.97
γ 24.0	8.61	9.02	9.54	10.07
γ 25.0	7.28	7.72	8.05	8.47
γ 26.0	5.94	6.28	6.63	6.89
γ 27.0	4.90	5.13	5.28	5.45
γ 28.0	4.16	4.31	4.39	4.45
γ 29.0	3.53	3.66	3.72	3.78
γ 30.0	2.99	3.10	3.16	3.23
γ 31.0	2.50	2.60	2.67	2.76
γ 32.0	2.06	2.16	2.24	2.34
γ 33.0	1.68	1.80	1.86	1.97
γ 34.0	1.38	1.48	1.55	1.64
γ 35.0	1.15	1.22	1.29	1.37
γ 36.0	0.95	1.03	1.07	1.16
γ 37.0	0.78	0.85	0.89	0.96
γ 38.0	0.62	0.68	0.73	0.79
γ 39.0	0.49	0.54	0.59	0.63
γ 40.0	0.38	0.41	0.45	0.49
γ 41.0	0.27	0.31	0.33	0.37
γ 42.0	0.16	0.20	0.22	0.25
γ 43.0	0.07	0.09	0.10	0.13
γ 44.0	0.00	0.02	0.03	0.04
γ 45.0	0.00	0.00	0.00	0.00
γ 46.0	0.00	0.00	0.00	0.00
γ 47.0	0.00	0.00	0.00	0.00
γ 48.0	0.00	0.00	0.00	0.00
γ 49.0	0.00	0.00	0.00	0.00
γ 50.0	0.00	0.00	0.00	0.00
γ 51.0	0.00	0.00	0.00	0.00
γ 52.0	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 53.0	0.00	0.00	0.00	0.00
γ 54.0	0.00	0.00	0.00	0.00
γ 55.0	0.00	0.00	0.00	0.00
γ 56.0	0.00	0.00	0.00	0.00
γ 57.0	0.00	0.00	0.00	0.00
γ 58.0	0.00	0.00	0.00	0.00
γ 59.0	0.00	0.00	0.00	0.00
γ 60.0	0.00	0.00	0.00	0.00
γ 61.0	0.00	0.00	0.00	0.00
γ 62.0	0.00	0.00	0.00	0.00
γ 63.0	0.00	0.00	0.00	0.00
γ 64.0	0.00	0.00	0.00	0.00
γ 65.0	0.00	0.00	0.00	0.00
γ 66.0	0.00	0.00	0.00	0.00
γ 67.0	0.00	0.00	0.00	0.00
γ 68.0	0.00	0.00	0.00	0.00
γ 69.0	0.00	0.00	0.00	0.00
γ 70.0	0.00	0.00	0.00	0.00
γ 71.0	0.00	0.00	0.00	0.00
γ 72.0	0.00	0.00	0.00	0.00
γ 73.0	0.00	0.00	0.00	0.00
γ 74.0	0.00	0.00	0.00	0.00
γ 75.0	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00	0.00	0.00
γ 80.0	0.00	0.00	0.00	0.00
γ 81.0	0.00	0.00	0.00	0.00
γ 82.0	0.00	0.00	0.00	0.00
γ 83.0	0.00	0.00	0.00	0.00
γ 84.0	0.00	0.00	0.00	0.00
γ 85.0	0.00	0.00	0.00	0.00
γ 86.0	0.00	0.00	0.00	0.00
γ 87.0	0.00	0.00	0.00	0.00
γ 88.0	0.00	0.00	0.00	0.00
γ 89.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.00	0.00
γ 140.0	0.00	0.00	0.00	0.00
γ 141.0	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00

IES Indoor Report

Photometric Filename:AD21240-1W-B3535-3090-LDK14.8-15D-AIDIming-350mA.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 147.0	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.00	0.00
γ 170.0	0.00	0.00	0.00	0.00
γ 171.0	0.00	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.00	0.00
γ 173.0	0.00	0.00	0.00	0.00
γ 174.0	0.00	0.00	0.00	0.00
γ 175.0	0.00	0.00	0.00	0.00
γ 176.0	0.00	0.00	0.00	0.00
γ 177.0	0.00	0.00	0.00	0.00
γ 178.0	0.00	0.00	0.00	0.00
γ 179.0	0.00	0.00	0.00	0.00
γ 180.0	0.00	0.00	0.00	0.00