

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES



Indoor Luminaire Photometric Data

Description Information

Luminaire Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Date: 2023/06/30
Manufacture: -	Shld. Ang(°):36	Test Machine:GON-2000
Test Lab: Test	Frequency(Hz):50	Lamp CCT(K): 3000 Ra: 90
Lum. Size(W*L*H):0.066m*0.066m*0.000m	Lum. Area(m2):0.003	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=22.5 γ=1.0	Temp.(°C): 25
		Humidity(%): 50.0

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 962.000	Luminaire Flux(lm): 962.557	Field Angle(10%Imax): 64.8(°)	
Rated Power(W): 15	Luminaire Efficiency: 100.06%	Down Lumens&Percent: 937.629lm 97.41%	
Rated Voltage(V): 220	Luminaire EER(lm/W): 68.607	Up Lumens&Percent: 24.928lm 2.59%	
Tested Power(W): 14.030	Max. Candela(cd): 1793.594	S/MH: C0_a180=0.718 C90_270=0.725	
Lamps' Inside: 1	Max Cand@Ang.(°): C=180.0 γ=1.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf):220.6, 0.109, 0.581	Beam Angle(50%Imax): 43.3(°)	ErP Φ use(90°): 908.867lm	
Lamp Size(W*L*H):0.066m*0.066m*0.000m	Left=-21.4°, Right=21.8°	IRF(%): 404.123	

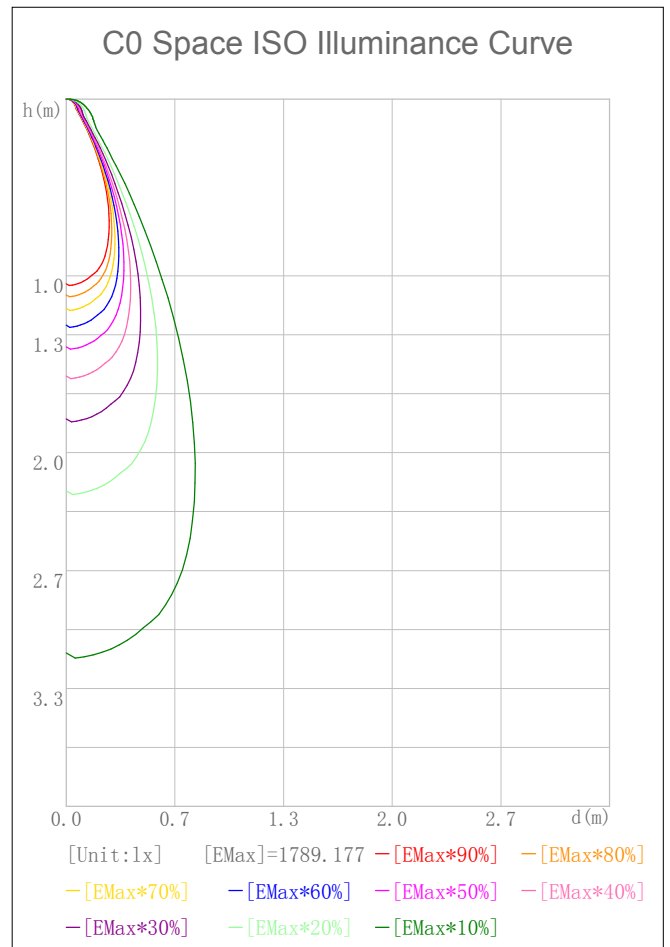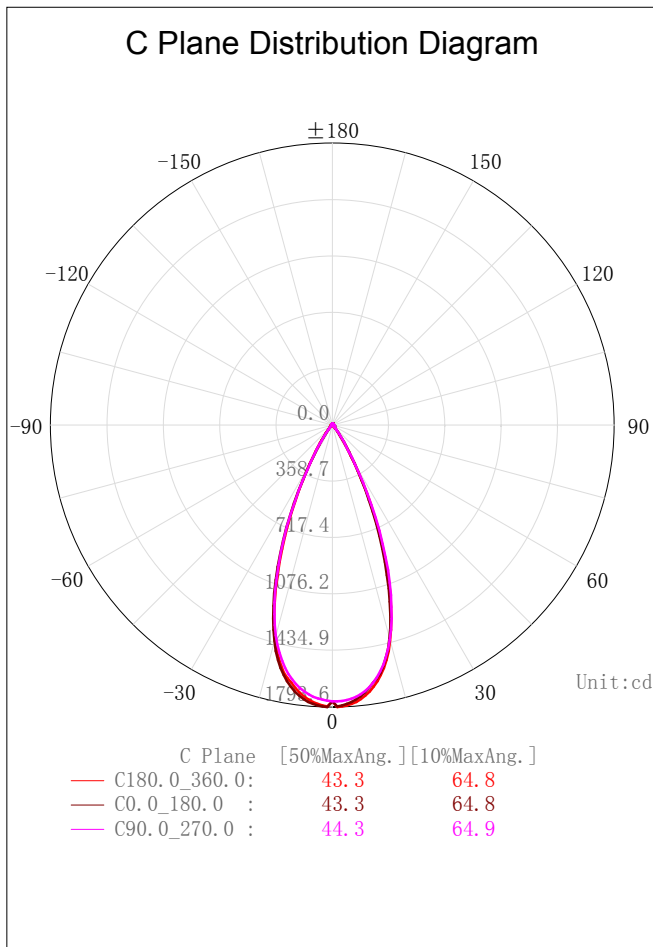



IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

2D Plane Light Intensity Distribution Curve

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

C Plane Distribution Diagram

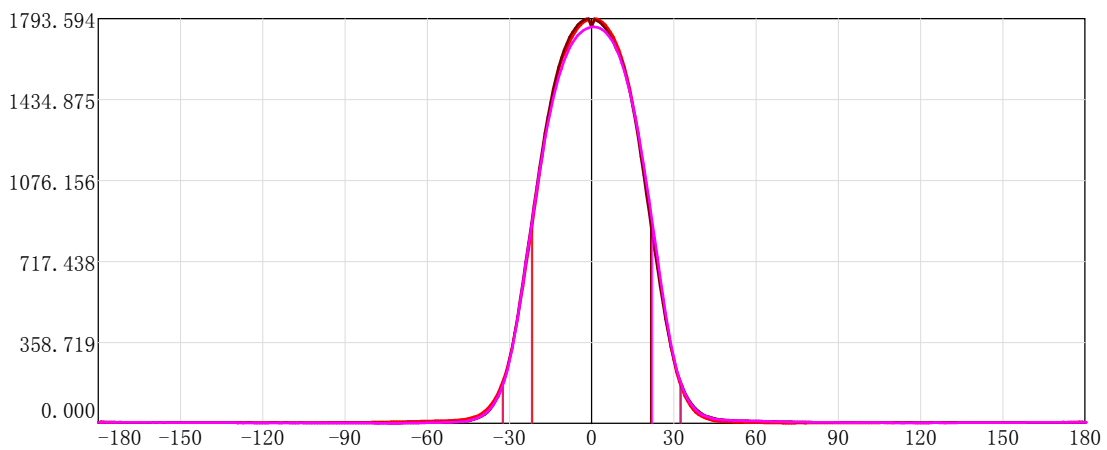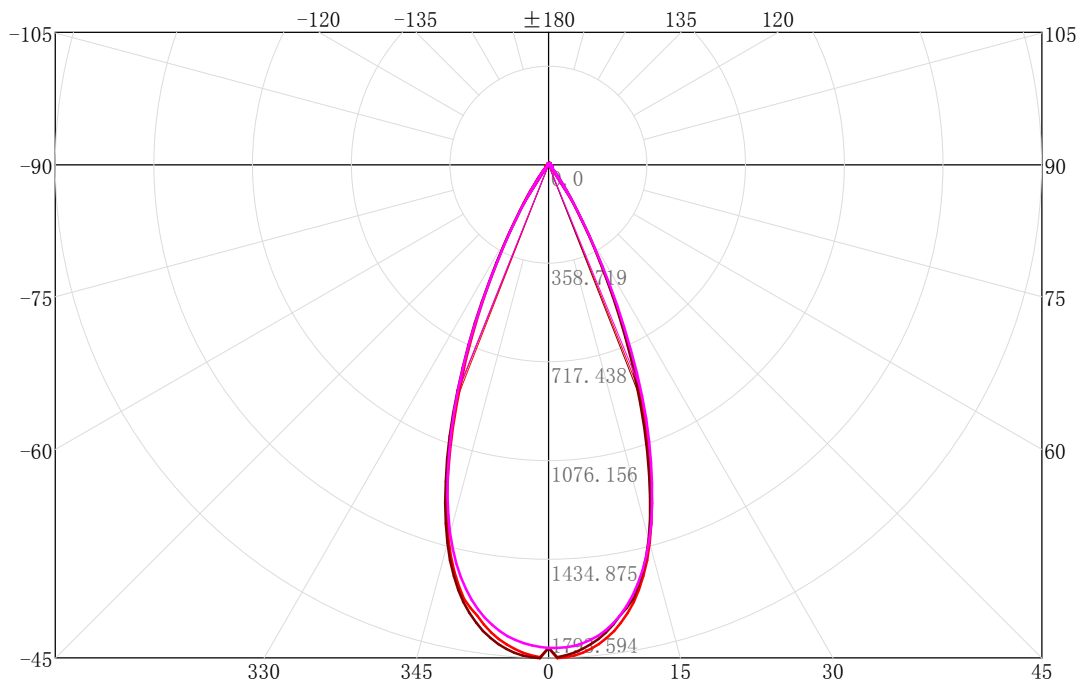

	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
—	C180.0_360.0:	43.3	64.8	
—	C0.0_180.0 :	43.3	64.8	
—	C90.0_270.0 :	44.3	64.9	


IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

3D Light Intensity Distribution Modal

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

3D Light Intensity Distribution Modal

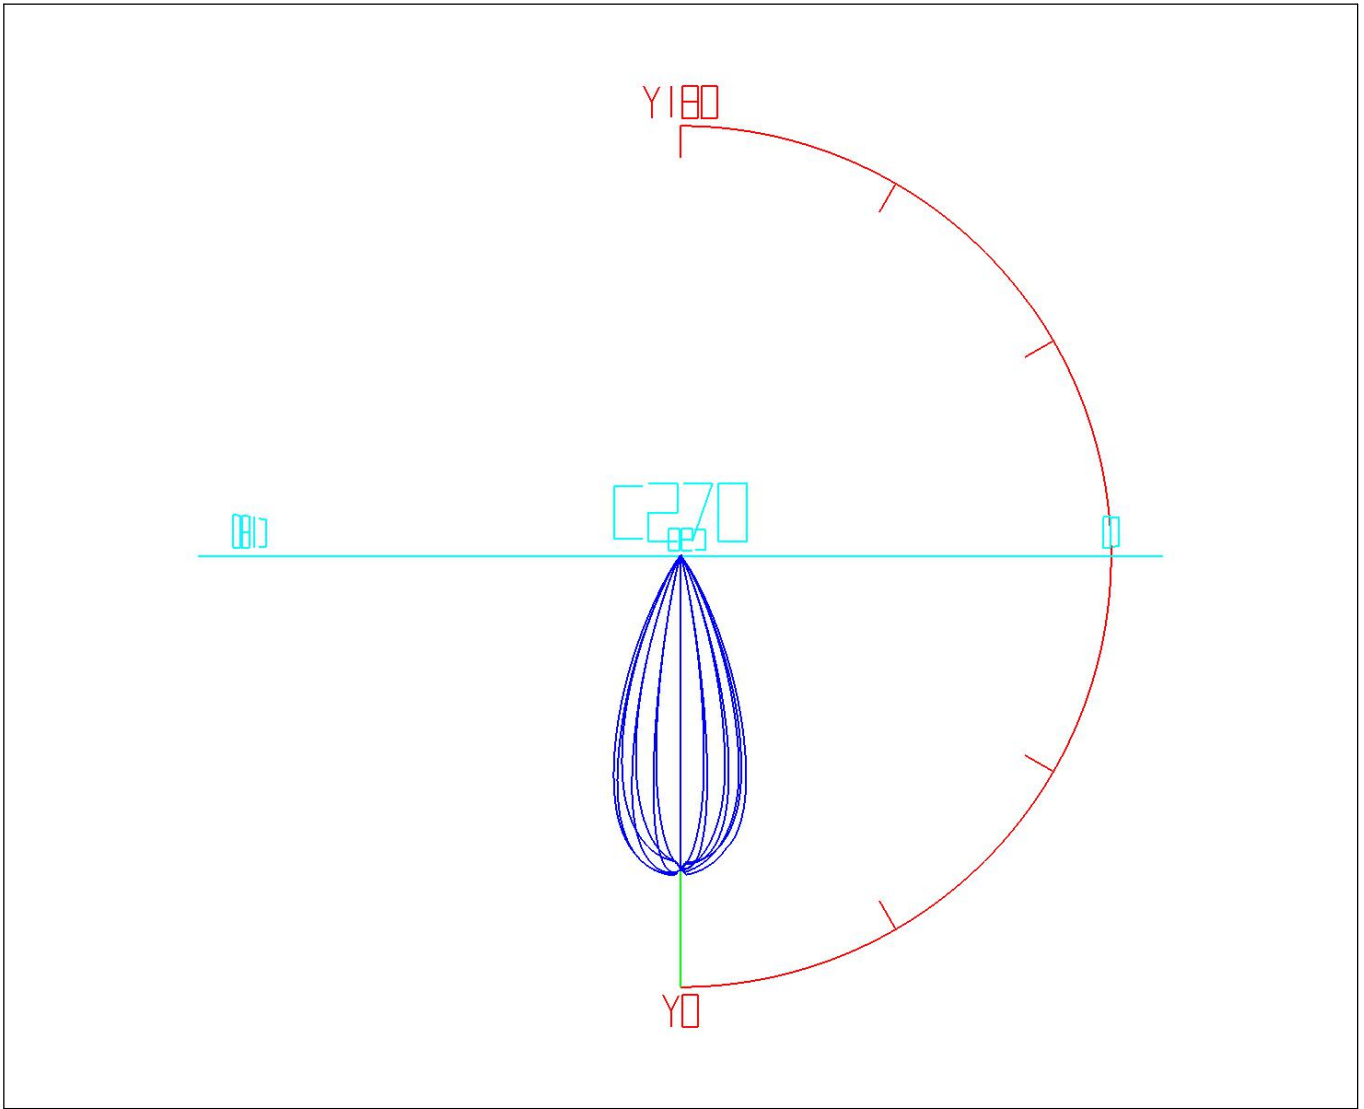

Curves: 3D Model ——— Fixture ——— Vert. HUD ——— Hori. HUD ———
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	1.68	1.68	0.17	0.17	47.0-48.0	1.00	912.21	0.10	94.82
1.0-2.0	5.03	6.71	0.52	0.70	48.0-49.0	0.95	913.16	0.10	94.92
2.0-3.0	8.37	15.08	0.87	1.57	49.0-50.0	0.92	914.08	0.10	95.02
3.0-4.0	11.66	26.74	1.21	2.78	50.0-51.0	0.89	914.97	0.09	95.11
4.0-5.0	14.90	41.64	1.55	4.33	51.0-52.0	0.86	915.83	0.09	95.20
5.0-6.0	18.06	59.70	1.88	6.21	52.0-53.0	0.83	916.66	0.09	95.29
6.0-7.0	21.13	80.83	2.20	8.40	53.0-54.0	0.81	917.47	0.08	95.37
7.0-8.0	24.08	104.91	2.50	10.91	54.0-55.0	0.79	918.25	0.08	95.45
8.0-9.0	26.88	131.80	2.79	13.70	55.0-56.0	0.77	919.02	0.08	95.53
9.0-10.0	29.52	161.32	3.07	16.77	56.0-57.0	0.76	919.78	0.08	95.61
10.0-11.0	31.97	193.28	3.32	20.09	57.0-58.0	0.74	920.52	0.08	95.69
11.0-12.0	34.18	227.46	3.55	23.64	58.0-59.0	0.73	921.25	0.08	95.76
12.0-13.0	36.13	263.59	3.76	27.40	59.0-60.0	0.71	921.96	0.07	95.84
13.0-14.0	37.78	301.37	3.93	31.33	60.0-61.0	0.70	922.65	0.07	95.91
14.0-15.0	39.07	340.44	4.06	35.39	61.0-62.0	0.68	923.33	0.07	95.98
15.0-16.0	39.96	380.40	4.15	39.54	62.0-63.0	0.66	924.00	0.07	96.05
16.0-17.0	40.43	420.83	4.20	43.75	63.0-64.0	0.65	924.65	0.07	96.12
17.0-18.0	40.48	461.31	4.21	47.95	64.0-65.0	0.63	925.27	0.07	96.18
18.0-19.0	40.13	501.44	4.17	52.12	65.0-66.0	0.61	925.88	0.06	96.25
19.0-20.0	39.38	540.82	4.09	56.22	66.0-67.0	0.58	926.46	0.06	96.31
20.0-21.0	38.24	579.06	3.97	60.19	67.0-68.0	0.57	927.03	0.06	96.36
21.0-22.0	36.73	615.79	3.82	64.01	68.0-69.0	0.55	927.58	0.06	96.42
22.0-23.0	34.89	650.68	3.63	67.64	69.0-70.0	0.54	928.12	0.06	96.48
23.0-24.0	32.75	683.43	3.40	71.04	70.0-71.0	0.53	928.65	0.06	96.53
24.0-25.0	30.33	713.76	3.15	74.20	71.0-72.0	0.52	929.17	0.05	96.59
25.0-26.0	27.69	741.44	2.88	77.07	72.0-73.0	0.51	929.69	0.05	96.64
26.0-27.0	24.91	766.36	2.59	79.66	73.0-74.0	0.50	930.19	0.05	96.69
27.0-28.0	22.11	788.46	2.30	81.96	74.0-75.0	0.50	930.69	0.05	96.75
28.0-29.0	19.36	807.82	2.01	83.97	75.0-76.0	0.49	931.18	0.05	96.80
29.0-30.0	16.75	824.58	1.74	85.71	76.0-77.0	0.49	931.67	0.05	96.85
30.0-31.0	14.35	838.93	1.49	87.21	77.0-78.0	0.48	932.15	0.05	96.90
31.0-32.0	12.19	851.12	1.27	88.47	78.0-79.0	0.48	932.62	0.05	96.95
32.0-33.0	10.30	861.42	1.07	89.54	79.0-80.0	0.47	933.10	0.05	97.00
33.0-34.0	8.69	870.11	0.90	90.45	80.0-81.0	0.47	933.57	0.05	97.04
34.0-35.0	7.31	877.42	0.76	91.21	81.0-82.0	0.47	934.03	0.05	97.09
35.0-36.0	6.14	883.57	0.64	91.85	82.0-83.0	0.46	934.49	0.05	97.14
36.0-37.0	5.13	888.69	0.53	92.38	83.0-84.0	0.46	934.95	0.05	97.19
37.0-38.0	4.25	892.95	0.44	92.82	84.0-85.0	0.45	935.40	0.05	97.24
38.0-39.0	3.52	896.47	0.37	93.19	85.0-86.0	0.45	935.86	0.05	97.28
39.0-40.0	2.94	899.41	0.31	93.49	86.0-87.0	0.45	936.30	0.05	97.33
40.0-41.0	2.49	901.90	0.26	93.75	87.0-88.0	0.44	936.75	0.05	97.37
41.0-42.0	2.15	904.05	0.22	93.98	88.0-89.0	0.44	937.19	0.05	97.42
42.0-43.0	1.86	905.91	0.19	94.17	89.0-90.0	0.44	937.63	0.05	97.47
43.0-44.0	1.61	907.52	0.17	94.34	90.0-91.0	0.43	938.06	0.05	97.51
44.0-45.0	1.39	908.91	0.14	94.48	91.0-92.0	0.43	938.50	0.05	97.56
45.0-46.0	1.21	910.12	0.13	94.61	92.0-93.0	0.44	938.93	0.05	97.60
46.0-47.0	1.09	911.21	0.11	94.72	93.0-94.0	0.44	939.37	0.05	97.65

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Zonal Flux Tabulation - (Cont.)


Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.43	939.80	0.05	97.69	141.0-142.0	0.28	955.97	0.03	99.37
95.0-96.0	0.43	940.23	0.04	97.74	142.0-143.0	0.27	956.24	0.03	99.40
96.0-97.0	0.43	940.66	0.04	97.78	143.0-144.0	0.27	956.51	0.03	99.43
97.0-98.0	0.42	941.08	0.04	97.83	144.0-145.0	0.27	956.78	0.03	99.46
98.0-99.0	0.42	941.50	0.04	97.87	145.0-146.0	0.27	957.04	0.03	99.48
99.0-100.0	0.42	941.92	0.04	97.91	146.0-147.0	0.26	957.31	0.03	99.51
100.0-101.0	0.41	942.33	0.04	97.96	147.0-148.0	0.26	957.57	0.03	99.54
101.0-102.0	0.40	942.74	0.04	98.00	148.0-149.0	0.26	957.82	0.03	99.57
102.0-103.0	0.40	943.14	0.04	98.04	149.0-150.0	0.26	958.08	0.03	99.59
103.0-104.0	0.40	943.54	0.04	98.08	150.0-151.0	0.25	958.33	0.03	99.62
104.0-105.0	0.39	943.93	0.04	98.12	151.0-152.0	0.25	958.58	0.03	99.64
105.0-106.0	0.39	944.32	0.04	98.16	152.0-153.0	0.25	958.83	0.03	99.67
106.0-107.0	0.39	944.71	0.04	98.20	153.0-154.0	0.25	959.08	0.03	99.70
107.0-108.0	0.38	945.10	0.04	98.24	154.0-155.0	0.24	959.32	0.03	99.72
108.0-109.0	0.38	945.48	0.04	98.28	155.0-156.0	0.23	959.55	0.02	99.75
109.0-110.0	0.37	945.85	0.04	98.32	156.0-157.0	0.23	959.78	0.02	99.77
110.0-111.0	0.37	946.21	0.04	98.36	157.0-158.0	0.22	960.00	0.02	99.79
111.0-112.0	0.37	946.58	0.04	98.40	158.0-159.0	0.21	960.21	0.02	99.81
112.0-113.0	0.36	946.94	0.04	98.43	159.0-160.0	0.20	960.41	0.02	99.83
113.0-114.0	0.36	947.30	0.04	98.47	160.0-161.0	0.19	960.60	0.02	99.85
114.0-115.0	0.36	947.65	0.04	98.51	161.0-162.0	0.19	960.79	0.02	99.87
115.0-116.0	0.35	948.01	0.04	98.55	162.0-163.0	0.18	960.97	0.02	99.89
116.0-117.0	0.35	948.35	0.04	98.58	163.0-164.0	0.17	961.14	0.02	99.91
117.0-118.0	0.34	948.70	0.04	98.62	164.0-165.0	0.16	961.30	0.02	99.93
118.0-119.0	0.34	949.04	0.04	98.65	165.0-166.0	0.15	961.46	0.02	99.94
119.0-120.0	0.34	949.38	0.04	98.69	166.0-167.0	0.15	961.60	0.02	99.96
120.0-121.0	0.33	949.71	0.03	98.72	167.0-168.0	0.14	961.74	0.01	99.97
121.0-122.0	0.33	950.04	0.03	98.76	168.0-169.0	0.13	961.87	0.01	99.99
122.0-123.0	0.32	950.36	0.03	98.79	169.0-170.0	0.12	961.98	0.01	100.00
123.0-124.0	0.32	950.68	0.03	98.82	170.0-171.0	0.11	962.09	0.01	100.01
124.0-125.0	0.32	951.00	0.03	98.86	171.0-172.0	0.10	962.19	0.01	100.02
125.0-126.0	0.31	951.31	0.03	98.89	172.0-173.0	0.09	962.27	0.01	100.03
126.0-127.0	0.31	951.62	0.03	98.92	173.0-174.0	0.07	962.35	0.01	100.04
127.0-128.0	0.31	951.93	0.03	98.95	174.0-175.0	0.06	962.41	0.01	100.04
128.0-129.0	0.30	952.23	0.03	98.98	175.0-176.0	0.05	962.46	0.01	100.05
129.0-130.0	0.30	952.54	0.03	99.02	176.0-177.0	0.04	962.50	0.00	100.05
130.0-131.0	0.30	952.84	0.03	99.05	177.0-178.0	0.03	962.53	0.00	100.06
131.0-132.0	0.30	953.14	0.03	99.08	178.0-179.0	0.02	962.55	0.00	100.06
132.0-133.0	0.29	953.43	0.03	99.11	179.0-180.0	0.01	962.56	0.00	100.06
133.0-134.0	0.29	953.72	0.03	99.14					
134.0-135.0	0.29	954.01	0.03	99.17					
135.0-136.0	0.29	954.30	0.03	99.20					
136.0-137.0	0.28	954.58	0.03	99.23					
137.0-138.0	0.28	954.86	0.03	99.26					
138.0-139.0	0.28	955.14	0.03	99.29					
139.0-140.0	0.28	955.42	0.03	99.32					
140.0-141.0	0.28	955.70	0.03	99.34					

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Rectangle ISO Lighting Intensity Diagram

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

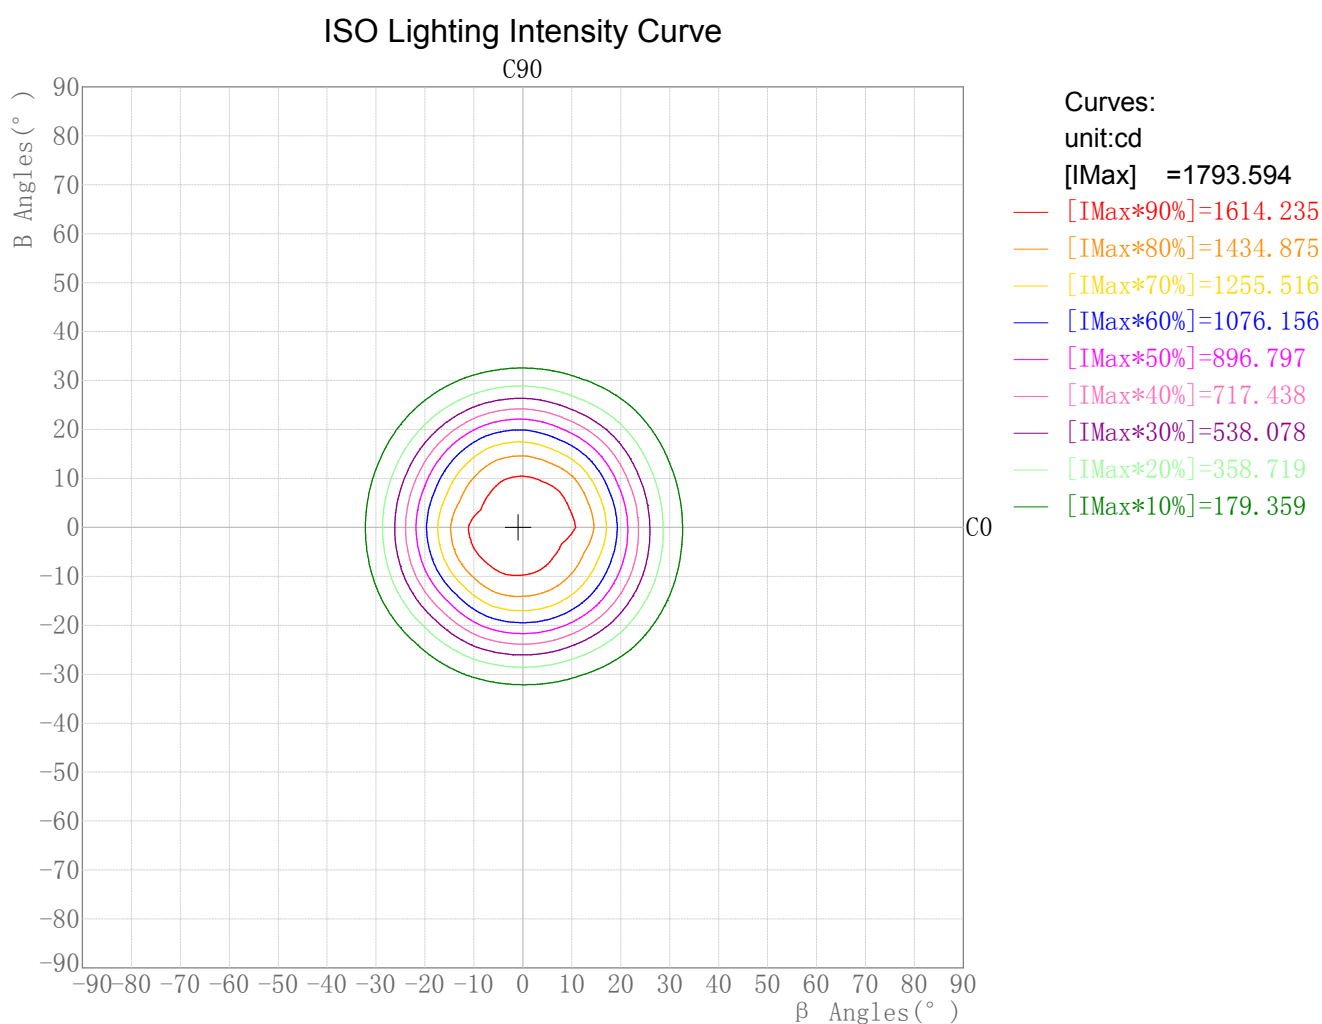


Maximum Light Intensity(cd): 1793.59
Maximum Cand.@Angle: H=-1.0°,V=0.0°

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Round ISO Lighting Intensity Diagram

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

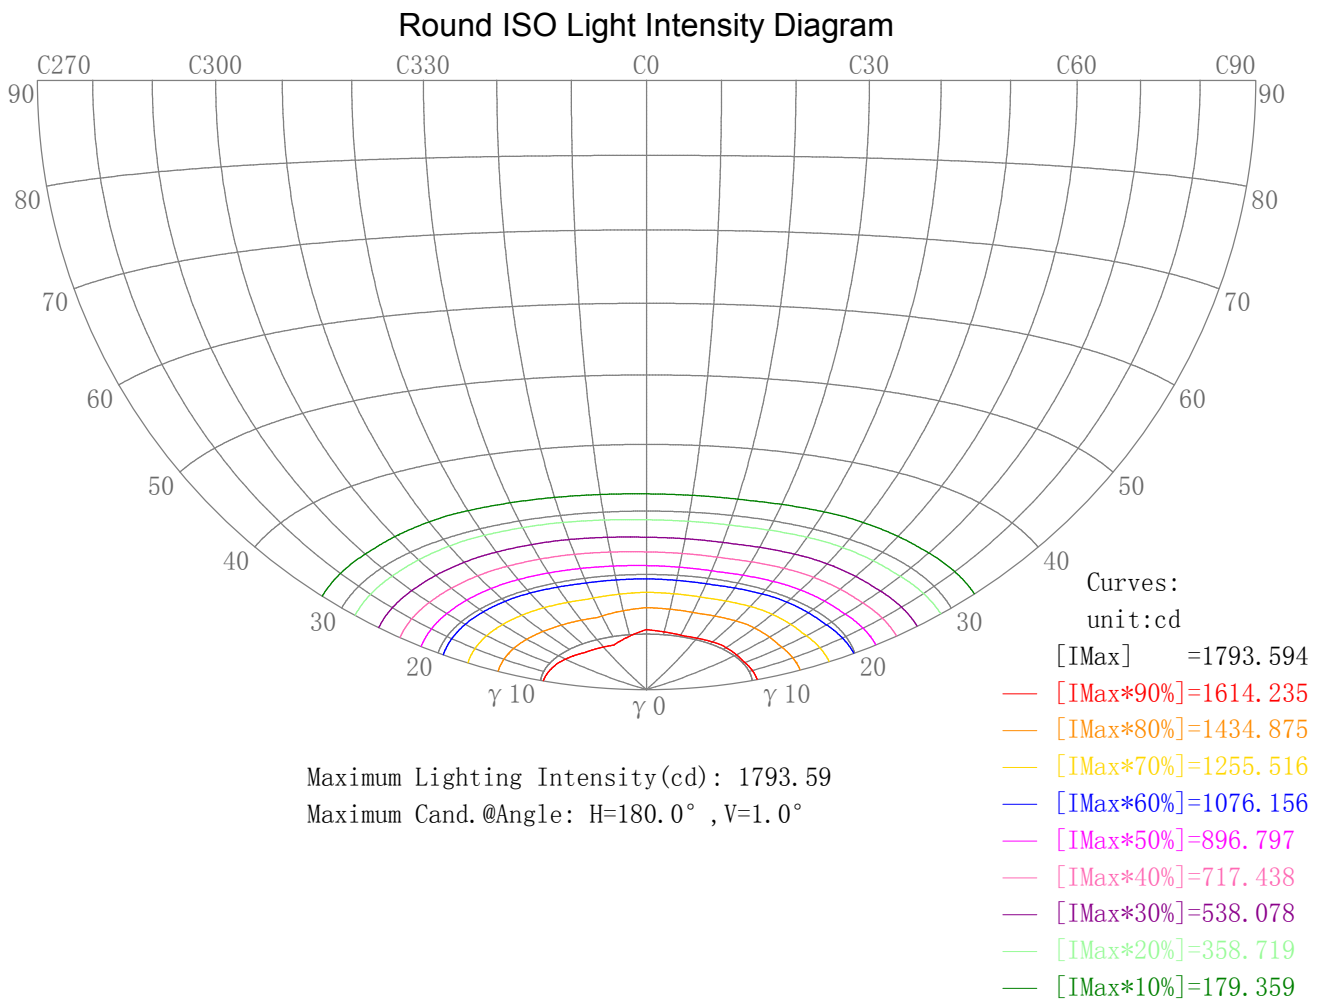


IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Plane ISO-Illuminance Diagram

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

Plane ISO-Illuminance Curve

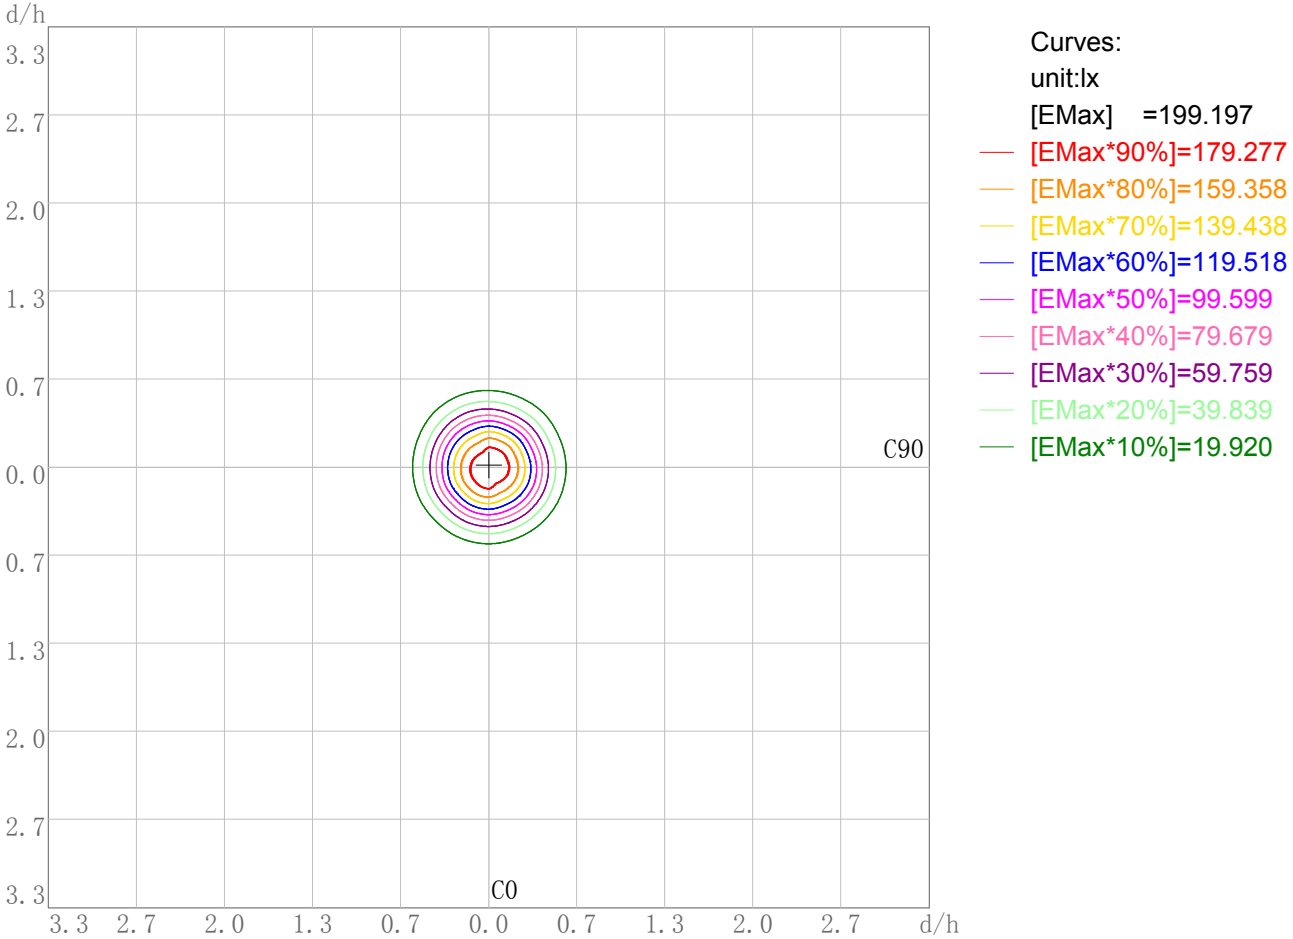

Working Plane Luminaire Mounting Height(m): 3.00
 Working Plane Maximum Illuminance(lx): 199.20
 Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.0


IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

3D Plane ISO Illuminance Diagram

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

3D Plane Illuminance Modal

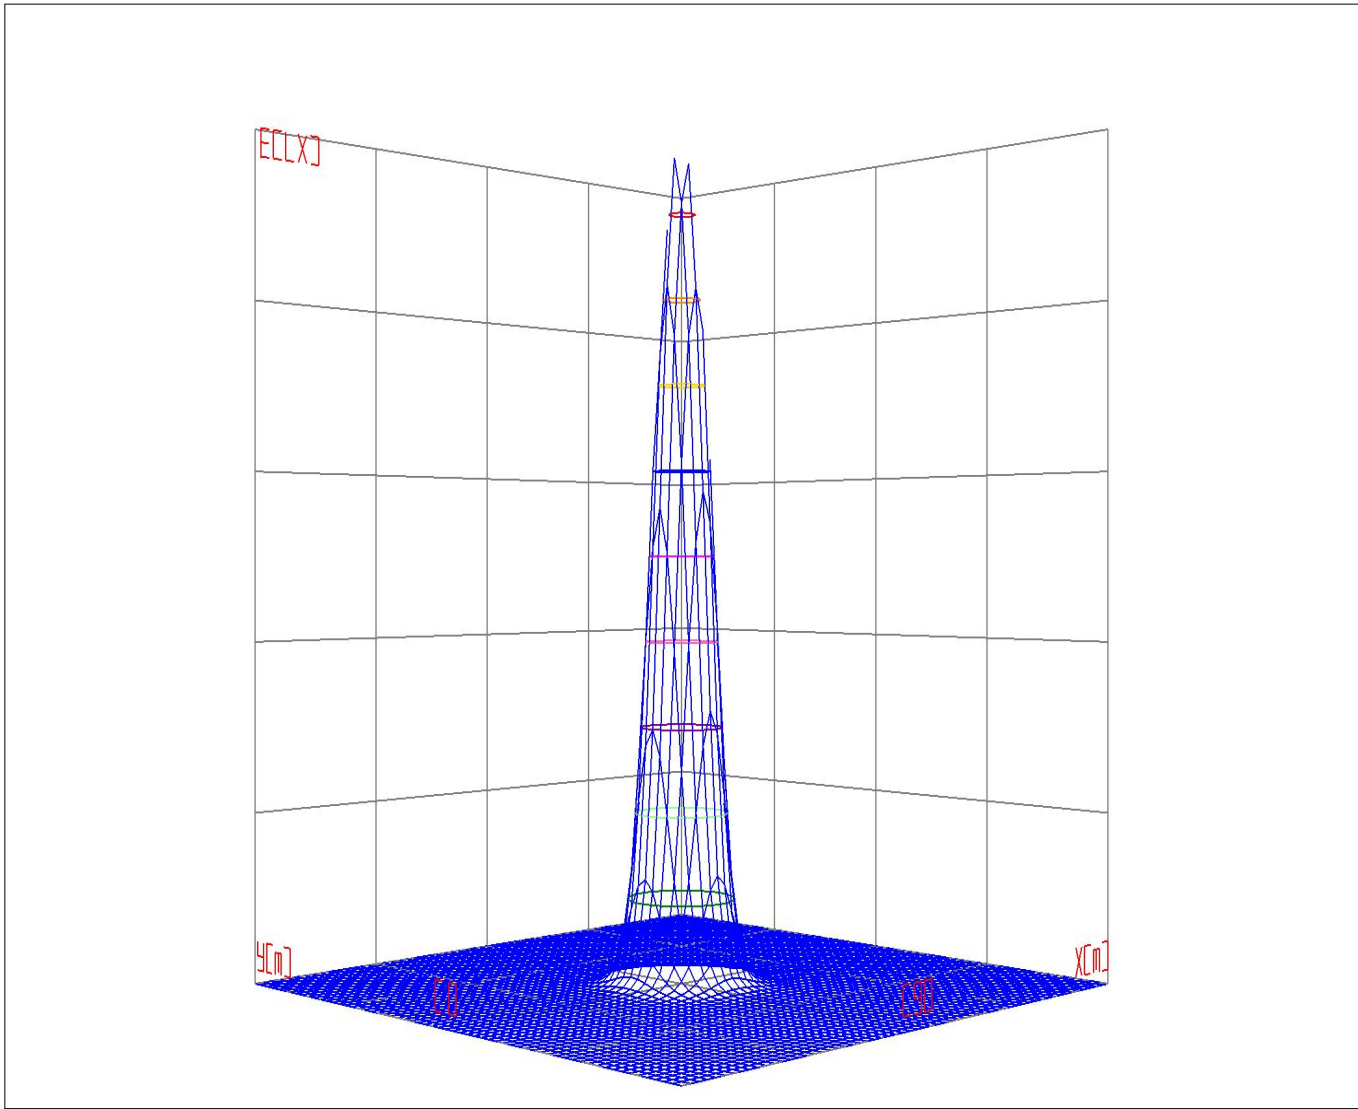

Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0


IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Space ISO Illuminance Diagram

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

Space ISO Illuminance Curve

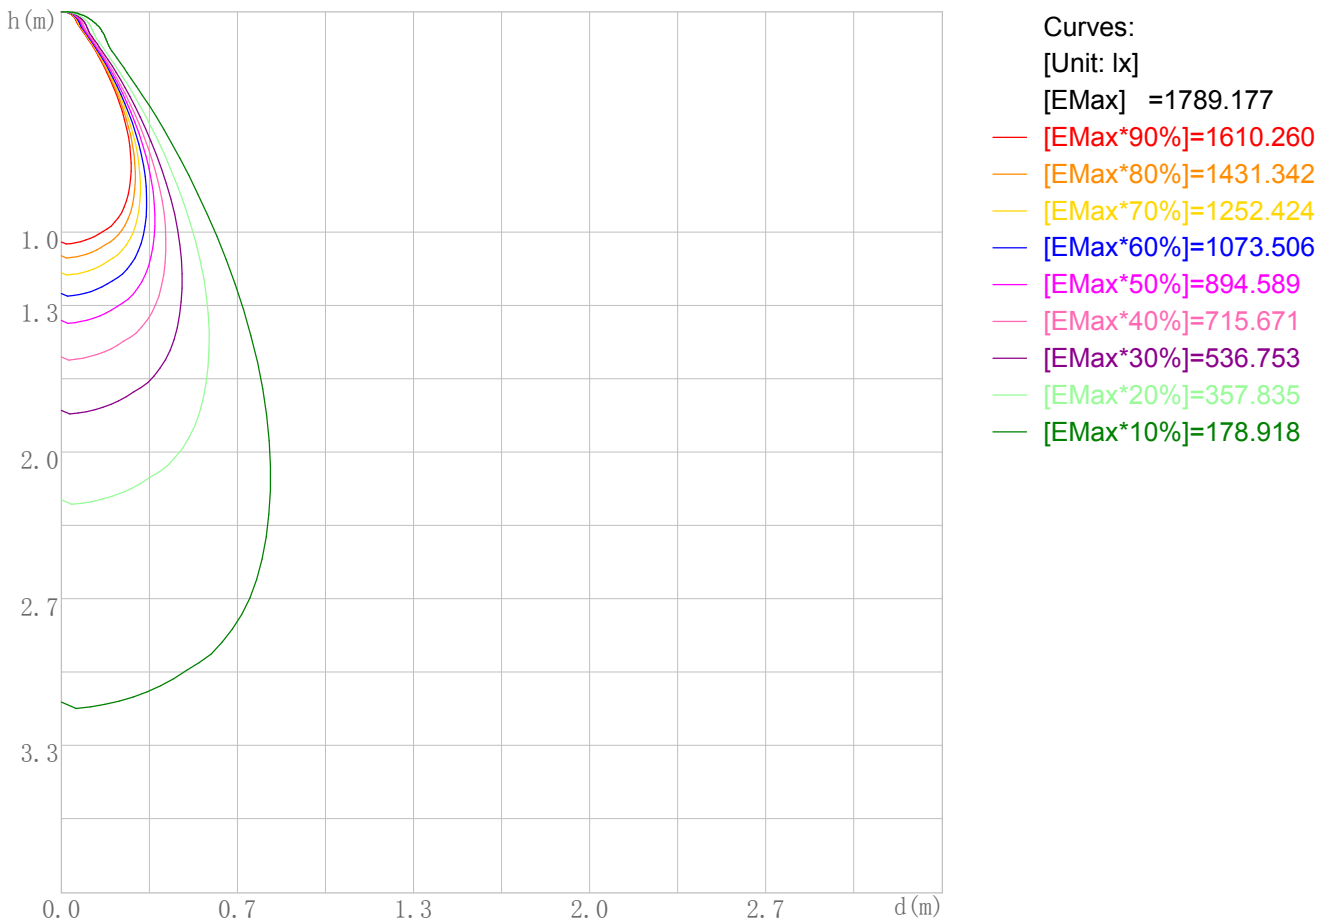

Space Plane Maximum Illuminance and @Angle:1789.18lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:1789.995cd,0deg


IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Illuminance-Distance Diagram

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

Illuminance-Distance Curve

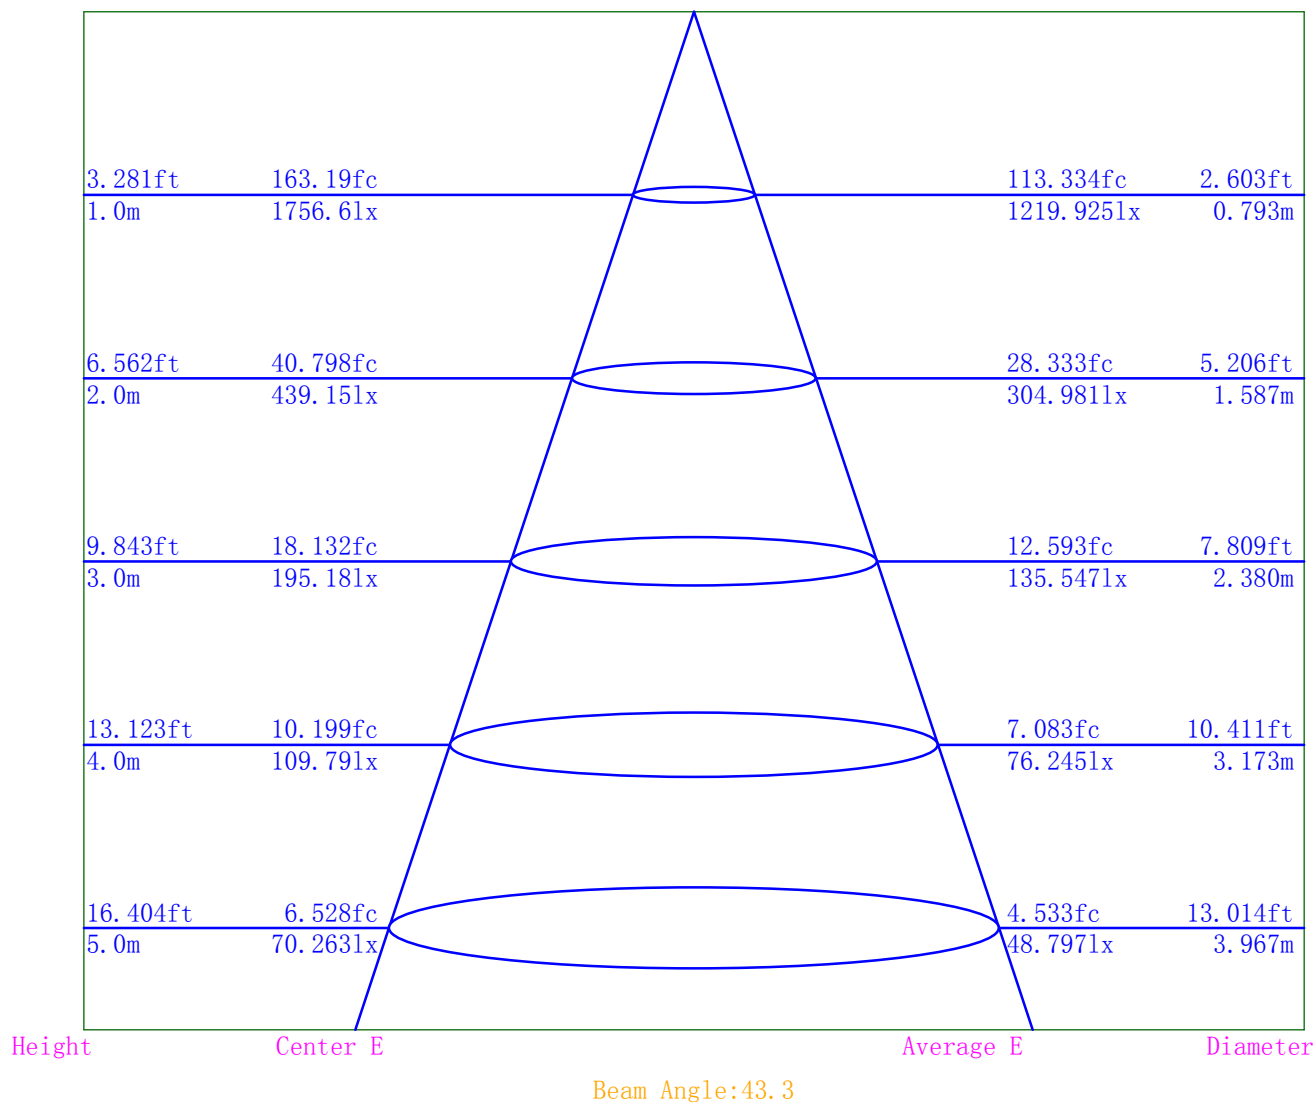

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Indoor Luminance Limiting Curves

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine:GON-2000	Test Date: 2023/06/30


Glare Grade Table

GI	Quality	Using Illuminance							
		a	b	c	d	e	f	g	h
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	9264	6879	6494	6532	6988	7190	8278	11078	19683
C90	8329	6473	6159	6308	6573	6896	7971	10418	18331

Luminance Limiting Curve

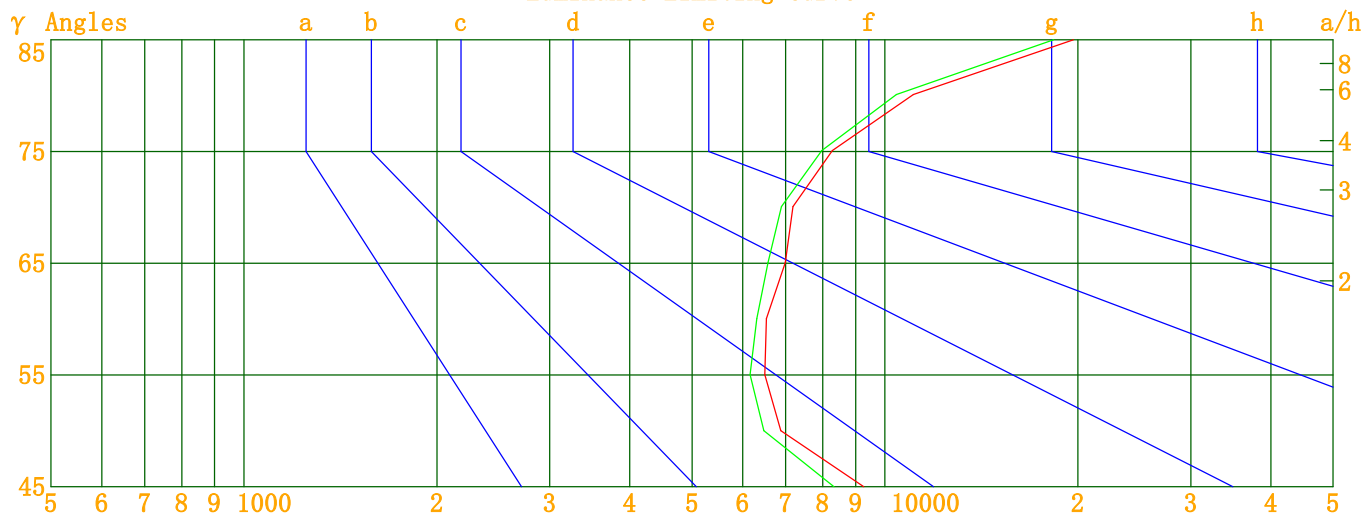


Luminous Size: Length(m)=-0.066 Width(m)=-0.066 Height(m)=0.000 Area(m^2)=0.003421
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Indoor Budgetary Estimate Table

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine: GON-2000	Test Date: 2023/06/30

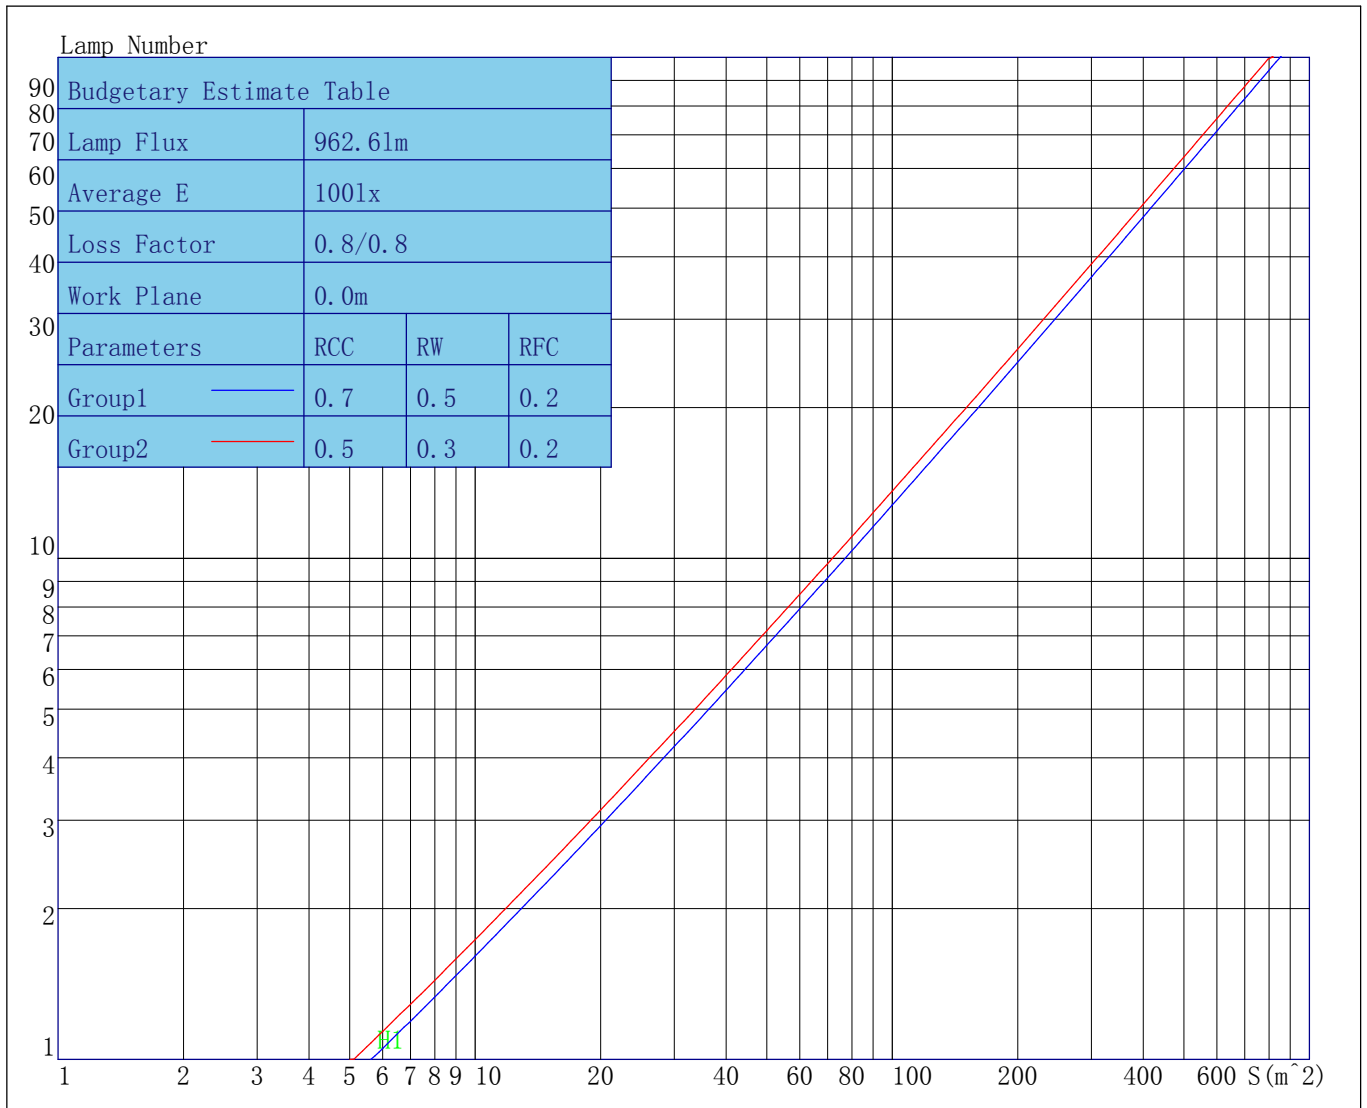

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
 Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
 Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Indoor Coefficient of Utilization Table

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine:GON-2000	Test Date: 2023/06/30

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	118	118	118	118	115	115	115	115	110	110	110	105	105	105	100	100	100	97
1	113	111	108	106	111	108	106	104	104	102	101	100	98	97	96	95	94	92
2	108	104	100	97	106	102	99	96	98	96	93	95	93	91	92	90	89	87
3	104	98	93	90	102	96	92	89	93	90	87	91	88	86	88	86	84	82
4	99	93	88	84	97	91	87	83	89	85	82	87	84	81	85	82	80	78
5	95	88	83	79	94	87	82	79	85	81	78	83	79	77	81	78	76	74
6	91	84	78	75	90	83	78	74	81	77	74	79	76	73	78	75	72	71
7	88	80	74	71	86	79	74	70	77	73	70	76	72	69	75	72	69	68
8	84	76	71	67	83	75	71	67	74	70	67	73	69	66	72	68	66	65
9	81	73	68	64	80	72	67	64	71	67	64	70	66	63	69	66	63	62
10	78	70	65	61	77	69	64	61	68	64	61	67	63	61	67	63	60	59

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Unified Glare Rating Table

Lum. Name: AW12540	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1204C9	Lamp Catalog: COB	Test Lab: Test
Manufacture: -	Test Machine:GON-2000	Test Date: 2023/06/30

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	14.3	15.3	14.8	15.6	16.0	14.5	15.4	14.9	15.7	16.1
	Y=3H	14.9	15.7	15.3	16.1	16.5	15.1	15.9	15.6	16.3	16.8
	Y=4H	15.3	16.1	15.8	16.5	17.0	15.6	16.4	16.1	16.8	17.3
	Y=6H	16.1	16.8	16.6	17.2	17.7	16.3	17.0	16.8	17.4	17.9
	Y=8H	16.6	17.2	17.1	17.7	18.1	16.8	17.4	17.3	17.9	18.4
	Y=12H	17.2	17.8	17.7	18.3	18.8	17.3	18.0	17.8	18.4	18.9
X=4H	Y=2H	14.3	15.0	14.7	15.4	15.9	14.5	15.3	15.0	15.7	16.1
	Y=3H	15.0	15.6	15.4	16.0	16.5	15.5	16.1	15.9	16.6	17.0
	Y=4H	15.6	16.2	16.1	16.6	17.1	16.2	16.8	16.7	17.2	17.7
	Y=6H	16.6	17.1	17.1	17.6	18.1	17.2	17.6	17.7	18.1	18.7
	Y=8H	17.2	17.7	17.8	18.2	18.7	17.8	18.2	18.3	18.7	19.3
	Y=12H	18.1	18.5	18.7	19.0	19.6	18.5	18.9	19.0	19.4	20.0
X=8H	Y=4H	15.7	16.2	16.3	16.7	17.2	16.5	16.9	17.0	17.4	18.0
	Y=6H	17.0	17.3	17.5	17.8	18.4	17.8	18.1	18.3	18.7	19.2
	Y=8H	17.8	18.1	18.4	18.7	19.2	18.6	18.9	19.1	19.4	20.0
	Y=12H	18.9	19.2	19.5	19.7	20.4	19.5	19.8	20.1	20.4	21.0
X=12H	Y=4H	15.8	16.1	16.3	16.7	17.2	16.6	16.9	17.1	17.5	18.0
	Y=6H	17.1	17.4	17.6	17.9	18.5	17.9	18.2	18.5	18.8	19.4
	Y=8H	18.0	18.3	18.6	18.8	19.4	18.9	19.1	19.4	19.7	20.3
Variations with the objverer position at spacings											
S=1.0H	0.0/-0.1					0.1/-0.1					
S=1.5H	0.1/-0.2					0.2/-0.2					
S=2.0H	0.2/-0.4					0.1/-0.1					
Reduced UGR Table:											
Nordic Standard Table:	BKO					BKO					
Correction Value	3.1					3.4					

o the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Candela Tabulation

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 0.0	1756.59	1756.59	1756.59	1756.59	1756.59	1756.59	1756.59	1756.59	1756.59	1756.59	1756.59	1756.59
γ 1.0	1789.99	1777.72	1770.20	1762.72	1756.87	1746.92	1724.92	1719.70	1793.59	1780.10	1769.35	1761.39
γ 2.0	1784.28	1772.78	1766.57	1759.93	1755.57	1746.22	1723.75	1717.66	1791.63	1777.64	1765.20	1757.62
γ 3.0	1776.03	1764.67	1760.54	1754.38	1751.57	1743.09	1720.27	1713.10	1786.85	1772.19	1758.82	1751.59
γ 4.0	1764.67	1753.77	1751.84	1745.87	1744.54	1736.44	1714.13	1706.04	1778.49	1763.60	1749.07	1742.99
γ 5.0	1750.73	1740.28	1739.68	1734.09	1734.35	1727.22	1704.98	1695.91	1766.92	1751.89	1736.92	1731.34
γ 6.0	1733.72	1724.10	1724.86	1719.52	1721.10	1714.73	1692.72	1682.48	1751.74	1737.22	1721.91	1716.86
γ 7.0	1713.09	1704.49	1706.57	1701.00	1704.58	1698.89	1676.80	1665.78	1733.23	1719.42	1703.75	1698.78
γ 8.0	1688.16	1681.10	1684.78	1678.45	1683.91	1678.93	1657.23	1645.58	1710.83	1698.15	1681.53	1677.54
γ 9.0	1659.46	1653.73	1659.00	1650.98	1659.04	1655.37	1633.19	1621.69	1684.71	1673.08	1655.71	1652.30
γ 10.0	1635.96	1622.05	1629.15	1620.21	1629.84	1627.60	1604.78	1593.48	1654.55	1643.62	1625.20	1622.59
γ 11.0	1607.83	1585.78	1595.32	1585.17	1596.38	1595.35	1572.51	1560.68	1620.04	1609.53	1590.46	1589.13
γ 12.0	1565.76	1545.44	1557.34	1544.59	1558.23	1558.47	1535.46	1523.23	1580.18	1570.64	1550.14	1550.90
γ 13.0	1519.34	1500.29	1513.42	1499.63	1515.21	1517.31	1493.34	1480.45	1534.04	1526.36	1505.22	1507.36
γ 14.0	1466.57	1448.40	1463.40	1448.65	1467.21	1470.95	1446.82	1431.84	1481.33	1475.15	1453.08	1457.81
γ 15.0	1406.06	1388.90	1405.83	1391.36	1413.55	1419.80	1394.89	1376.98	1421.83	1416.13	1394.06	1402.00
γ 16.0	1338.14	1320.96	1339.29	1325.98	1353.72	1362.60	1336.49	1315.58	1356.32	1350.29	1327.68	1338.86
γ 17.0	1262.19	1245.52	1265.21	1254.15	1287.66	1299.20	1272.50	1249.54	1285.47	1278.42	1254.84	1270.27
γ 18.0	1182.31	1165.57	1187.35	1178.81	1217.38	1231.58	1205.22	1180.62	1210.34	1201.96	1176.46	1197.39
γ 19.0	1100.13	1082.74	1107.06	1102.13	1144.56	1159.92	1135.30	1108.31	1131.85	1121.75	1095.21	1120.51
γ 20.0	1016.84	998.60	1024.59	1023.52	1068.57	1083.59	1060.68	1031.49	1050.16	1038.93	1011.51	1040.34
γ 21.0	932.89	914.62	940.75	943.41	989.14	1002.44	980.72	951.23	966.90	955.64	927.96	958.58
γ 22.0	849.76	831.82	858.01	861.15	906.86	918.17	897.38	869.37	883.46	873.68	845.59	875.97
γ 23.0	767.62	750.83	776.09	778.10	822.33	831.48	811.91	786.61	799.80	792.30	763.57	793.18
γ 24.0	687.20	671.94	695.49	695.19	736.47	744.32	725.51	703.55	715.67	711.01	682.78	710.09
γ 25.0	608.50	595.34	616.60	612.69	650.76	657.93	640.37	621.40	633.34	629.72	602.45	627.87
γ 26.0	533.38	521.65	540.32	533.12	567.69	574.14	557.51	541.62	552.66	549.74	523.21	547.22
γ 27.0	462.44	452.23	468.95	458.84	489.22	494.54	478.57	465.48	475.50	472.53	447.67	469.48
γ 28.0	397.53	388.39	402.64	391.16	416.68	420.73	405.89	394.09	402.98	400.03	377.07	397.54
γ 29.0	338.64	330.53	342.89	330.95	351.08	353.69	339.65	328.68	337.53	333.64	313.52	331.94
γ 30.0	285.96	278.99	289.27	278.53	292.84	293.71	281.70	270.83	278.86	275.23	258.19	274.21
γ 31.0	240.24	233.97	242.54	233.09	242.05	242.01	231.67	221.35	228.50	225.36	211.01	224.59
γ 32.0	200.49	195.07	202.20	193.57	199.20	198.76	189.22	180.52	185.72	183.32	171.28	182.69
γ 33.0	166.79	162.66	168.33	160.27	164.02	163.23	153.80	147.25	151.02	148.65	139.07	148.61
γ 34.0	138.84	135.91	140.17	133.28	134.94	133.73	125.00	119.90	122.25	120.50	112.72	120.66
γ 35.0	115.48	113.64	117.00	110.68	110.95	109.44	101.47	97.62	98.82	97.11	91.11	97.83
γ 36.0	95.97	95.12	97.98	92.36	91.32	89.46	81.89	79.01	79.34	77.42	72.52	78.84
γ 37.0	79.91	79.32	81.74	76.86	74.82	72.64	65.04	63.49	63.08	60.84	57.07	62.61
γ 38.0	66.31	65.84	68.07	63.68	60.67	58.17	51.38	51.38	49.79	47.55	44.84	49.16
γ 39.0	54.72	54.68	56.83	52.96	49.31	46.85	41.57	42.32	39.31	37.49	35.80	39.18
γ 40.0	45.45	45.61	47.33	44.12	40.92	38.72	35.15	35.87	32.06	30.59	29.24	32.03
γ 41.0	38.46	38.56	39.84	37.59	35.01	33.51	30.57	31.11	26.73	25.43	24.42	26.56
γ 42.0	33.20	33.34	34.14	32.58	30.62	29.03	26.89	27.00	21.92	20.98	19.75	21.86
γ 43.0	29.34	29.19	30.18	28.53	26.64	25.03	23.54	23.32	17.81	17.17	16.04	17.82
γ 44.0	25.62	25.63	26.22	24.74	23.08	22.15	20.83	20.26	14.61	13.83	13.20	14.19
γ 45.0	22.41	22.46	22.66	21.46	20.15	19.38	18.68	18.08	11.93	11.31	10.79	11.52
γ 46.0	20.01	19.58	19.78	18.78	17.94	17.48	16.96	16.70	9.99	9.74	9.38	9.59

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 47.0	17.94	17.65	17.62	17.03	16.46	16.16	15.91	15.61	8.86	8.71	8.60	8.54
γ 48.0	16.57	16.37	16.16	15.53	15.54	15.22	15.55	14.94	8.27	7.99	7.72	7.90
γ 49.0	15.65	15.47	15.09	14.89	14.91	14.77	15.07	14.66	7.60	7.46	6.91	7.41
γ 50.0	15.13	14.85	14.50	14.26	14.23	14.43	14.59	14.15	7.12	6.89	6.61	6.96
γ 51.0	14.36	14.43	13.90	13.90	13.60	13.90	13.86	13.44	6.77	6.49	6.39	6.55
γ 52.0	14.03	13.94	13.39	13.28	13.20	13.55	13.52	13.12	5.90	6.15	5.79	5.88
γ 53.0	13.33	13.41	12.95	12.90	12.90	13.02	12.93	12.94	5.82	5.75	5.52	5.51
γ 54.0	13.16	12.88	12.42	12.63	12.44	12.58	12.86	12.64	5.43	5.28	5.19	5.24
γ 55.0	12.74	12.68	11.98	12.38	12.09	11.93	12.64	12.45	5.18	4.82	4.84	4.87
γ 56.0	12.45	12.62	11.76	12.00	11.84	11.97	12.22	12.13	4.92	4.52	4.58	4.81
γ 57.0	12.47	12.27	11.19	11.54	11.61	11.75	11.80	11.84	4.76	4.49	4.32	4.55
γ 58.0	12.03	11.86	11.05	11.33	11.40	11.43	11.61	11.61	4.32	4.27	4.07	4.11
γ 59.0	11.71	11.59	10.90	11.03	11.02	11.04	11.25	11.36	4.10	3.81	3.90	3.84
γ 60.0	11.17	11.49	10.60	10.73	10.79	10.94	11.11	11.10	3.83	3.48	3.73	3.75
γ 61.0	11.20	11.23	10.48	10.63	10.66	10.63	10.80	10.73	3.72	3.36	3.53	3.63
γ 62.0	10.80	10.80	10.49	10.50	10.35	10.37	10.57	10.31	3.67	3.28	3.20	3.23
γ 63.0	10.59	10.48	10.11	10.20	9.99	9.94	10.54	9.97	3.47	3.06	2.93	3.10
γ 64.0	10.43	10.19	9.59	9.93	9.80	9.65	10.28	9.54	3.24	2.79	2.82	3.01
γ 65.0	10.10	10.00	9.46	9.69	9.50	9.49	9.99	9.33	2.86	2.58	2.43	2.71
γ 66.0	9.73	9.82	9.16	9.34	9.15	9.16	9.60	9.15	2.58	2.43	2.29	2.22
γ 67.0	9.33	9.35	8.83	8.94	8.91	8.64	9.22	8.85	2.39	2.31	2.51	2.06
γ 68.0	8.92	8.95	8.27	8.53	8.61	8.50	8.64	8.68	2.40	2.34	2.30	2.03
γ 69.0	8.88	8.62	8.15	8.50	8.34	8.27	8.33	8.41	2.47	2.21	2.21	1.98
γ 70.0	8.41	8.33	8.10	8.14	8.07	8.00	8.34	8.17	1.99	2.03	1.93	2.29
γ 71.0	8.24	8.19	7.93	7.83	7.74	7.99	8.08	7.90	2.10	2.03	2.07	2.18
γ 72.0	8.10	7.87	7.76	7.64	7.65	7.78	8.03	7.79	2.04	1.95	1.98	2.30
γ 73.0	7.82	7.75	7.47	7.33	7.54	7.62	7.64	7.63	1.96	1.80	2.10	2.19
γ 74.0	7.53	7.58	7.29	7.33	7.27	7.54	7.48	7.42	2.12	1.83	2.07	2.16
γ 75.0	7.33	7.50	6.96	7.13	7.06	7.32	7.35	7.23	2.33	1.98	2.06	2.01
γ 76.0	7.23	7.46	6.99	6.76	6.87	6.90	7.21	7.02	2.57	1.90	2.30	2.09
γ 77.0	7.24	7.00	6.74	6.40	6.73	6.73	6.73	6.93	2.45	2.01	2.30	2.27
γ 78.0	7.11	6.76	6.68	6.46	6.52	6.59	6.71	6.84	2.13	2.05	2.24	2.30
γ 79.0	6.84	6.76	6.35	6.27	6.29	6.34	6.80	6.62	2.29	2.15	2.33	2.32
γ 80.0	6.58	6.66	6.45	6.21	6.19	6.16	6.74	6.29	2.24	2.29	2.59	2.38
γ 81.0	6.26	6.54	6.37	6.06	6.12	6.17	6.54	6.13	2.45	2.37	2.64	2.34
γ 82.0	6.10	6.39	6.26	5.93	5.95	5.83	6.34	5.93	2.52	2.42	2.71	2.36
γ 83.0	6.22	6.32	5.94	5.68	5.55	5.90	6.29	5.78	2.33	2.56	2.63	2.23
γ 84.0	6.03	6.19	5.92	5.78	5.34	5.63	6.20	5.84	2.48	2.60	2.58	2.43
γ 85.0	5.87	6.04	5.82	5.28	5.47	5.67	6.06	5.68	2.69	2.61	2.71	2.32
γ 86.0	5.81	5.97	5.59	5.33	5.44	5.59	5.91	5.48	2.57	2.48	2.79	2.42
γ 87.0	5.65	5.83	5.57	5.28	5.23	5.42	5.70	5.36	2.90	2.47	2.62	2.49
γ 88.0	5.69	5.63	5.51	5.36	5.03	5.09	5.56	5.33	2.53	2.55	2.84	2.64
γ 89.0	5.47	5.46	5.47	5.05	4.91	5.26	5.66	5.43	2.80	2.60	2.95	2.53
γ 90.0	5.14	5.36	5.21	5.08	5.00	5.07	5.35	5.25	2.71	2.61	2.81	2.77
γ 91.0	5.34	5.23	4.99	4.94	4.86	4.86	5.16	5.12	2.95	2.72	2.65	2.76
γ 92.0	5.18	5.21	5.21	5.03	4.68	4.95	5.14	5.25	3.01	2.69	2.72	2.86
γ 93.0	5.37	5.10	5.10	4.78	4.72	4.69	5.16	5.12	2.97	2.83	3.07	2.84

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 94.0	5.26	5.09	5.24	4.87	4.64	4.90	4.96	4.82	2.99	3.06	2.98	3.07
γ 95.0	5.08	5.15	4.97	4.69	4.73	4.61	4.95	4.76	2.99	3.01	3.06	2.77
γ 96.0	5.05	5.04	4.90	4.72	4.78	4.56	4.88	4.81	3.27	3.00	3.06	2.95
γ 97.0	4.95	4.95	4.78	4.58	4.82	4.45	4.89	4.80	2.98	3.02	3.23	2.93
γ 98.0	5.03	4.78	4.76	4.76	4.59	4.52	4.58	4.86	3.21	3.07	3.40	2.96
γ 99.0	4.77	4.74	4.53	4.39	4.38	4.24	4.57	4.81	3.33	3.19	3.19	3.03
γ 100.0	4.60	4.65	4.43	4.12	4.52	4.47	4.56	4.68	3.54	3.28	3.16	3.16
γ 101.0	4.67	4.55	4.36	4.37	4.32	4.17	4.50	4.57	3.40	3.45	2.98	2.98
γ 102.0	4.42	4.53	4.20	3.99	4.03	4.11	4.40	4.41	3.50	3.42	3.05	3.18
γ 103.0	4.32	4.43	4.16	4.07	4.11	4.28	4.42	4.30	3.45	3.45	3.13	2.96
γ 104.0	4.46	4.46	4.14	3.96	4.19	4.11	4.42	4.22	3.49	3.45	2.96	2.93
γ 105.0	4.26	4.32	4.11	4.06	4.05	4.17	4.30	4.23	3.35	3.46	3.11	3.09
γ 106.0	4.07	4.37	4.04	4.32	3.98	4.07	4.18	4.35	3.55	3.41	3.29	3.19
γ 107.0	4.10	4.36	4.07	4.15	3.86	3.92	4.04	4.20	3.35	3.40	3.28	3.39
γ 108.0	4.20	4.21	4.01	3.97	3.68	3.85	4.03	4.09	3.53	3.32	3.32	3.14
γ 109.0	3.87	4.08	4.08	3.66	3.66	3.71	4.08	4.18	3.35	3.21	3.24	3.29
γ 110.0	3.84	3.87	3.92	3.88	3.52	3.73	4.03	4.05	3.47	3.41	3.28	3.48
γ 111.0	3.95	3.88	3.97	3.71	3.54	3.91	3.79	3.99	3.57	3.47	3.26	3.20
γ 112.0	3.88	3.99	4.00	3.79	3.47	3.64	3.84	4.17	3.69	3.48	3.26	3.16
γ 113.0	3.99	3.88	3.96	3.70	3.35	3.83	3.64	4.27	3.33	3.41	3.32	3.11
γ 114.0	3.93	3.82	3.90	3.71	3.48	3.73	3.67	4.20	3.35	3.39	3.28	3.24
γ 115.0	4.15	3.75	3.89	3.69	3.45	3.66	3.79	3.99	3.55	3.43	3.21	3.10
γ 116.0	4.04	3.82	3.77	3.63	3.43	3.56	3.81	3.99	3.59	3.32	3.30	3.39
γ 117.0	3.70	3.83	3.54	3.79	3.36	3.31	3.84	4.01	3.82	3.43	3.34	3.32
γ 118.0	3.79	3.62	3.74	3.76	3.36	3.36	3.82	3.94	3.42	3.40	3.28	3.32
γ 119.0	3.81	3.63	3.83	3.90	3.33	3.26	3.77	3.95	3.33	3.36	3.30	3.35
γ 120.0	4.11	3.77	3.88	3.55	3.32	3.37	3.67	3.92	3.44	3.46	3.22	3.38
γ 121.0	3.78	3.83	3.87	3.55	3.42	3.35	3.59	3.86	3.50	3.48	3.14	3.32
γ 122.0	3.89	3.66	3.68	3.48	3.40	3.32	3.41	3.85	3.54	3.58	3.24	3.12
γ 123.0	4.07	3.57	3.83	3.54	3.37	3.61	3.56	3.86	3.46	3.60	3.37	3.22
γ 124.0	3.87	3.58	3.48	3.54	3.41	3.26	3.57	3.87	3.58	3.60	3.50	3.29
γ 125.0	4.03	3.49	3.42	3.61	3.64	3.38	3.61	3.87	3.69	3.62	3.41	3.55
γ 126.0	3.61	3.55	3.65	3.69	3.66	3.40	3.70	3.87	3.57	3.57	3.21	3.41
γ 127.0	3.64	3.57	3.74	3.44	3.57	3.47	3.42	3.98	3.49	3.52	3.18	3.30
γ 128.0	3.84	3.41	3.84	3.66	3.51	3.40	3.68	4.07	3.60	3.42	3.19	3.36
γ 129.0	3.67	3.75	3.76	3.65	3.46	3.46	3.61	3.91	3.50	3.55	3.22	3.46
γ 130.0	3.73	3.96	3.69	3.54	3.46	3.38	3.57	3.81	3.59	3.70	3.34	3.44
γ 131.0	3.93	3.76	3.91	3.47	3.51	3.49	3.69	3.85	3.57	3.68	3.43	3.19
γ 132.0	3.74	3.74	3.82	3.47	3.54	3.55	3.61	3.92	3.68	3.65	3.42	3.13
γ 133.0	3.68	3.83	3.73	3.69	3.51	3.47	3.56	3.87	3.70	3.57	3.71	3.43
γ 134.0	3.78	3.96	3.69	3.80	3.56	3.54	3.63	3.95	3.62	3.53	3.44	3.55
γ 135.0	3.85	3.89	3.88	3.75	3.60	3.54	3.85	4.08	3.67	3.73	3.60	3.40
γ 136.0	3.93	3.97	3.77	3.63	3.66	3.46	3.67	4.08	3.85	3.66	3.64	3.61
γ 137.0	3.75	4.12	3.79	3.54	3.76	3.36	3.72	4.20	3.74	3.52	3.77	3.73
γ 138.0	3.73	4.05	3.71	3.52	3.81	3.73	3.77	4.34	3.84	3.62	3.69	3.55
γ 139.0	3.96	3.97	3.69	3.72	3.95	3.80	3.77	4.31	3.99	3.83	3.84	3.68
γ 140.0	4.25	4.02	3.91	3.77	3.77	3.91	3.77	4.28	3.98	3.93	3.80	3.52

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Candela Tabulation - (Cont.)

V/H	C0. 0	C22. 5	C45. 0	C67. 5	C90. 0	C112. 5	C135. 0	C157. 5	C180. 0	C202. 5	C225. 0	C247. 5
γ 141. 0	4. 37	4. 16	3. 96	3. 84	3. 67	3. 92	4. 07	4. 44	3. 86	4. 04	3. 86	3. 67
γ 142. 0	4. 09	4. 28	3. 84	3. 94	3. 86	4. 08	4. 13	4. 33	4. 20	4. 05	4. 02	3. 84
γ 143. 0	4. 16	4. 37	3. 85	4. 09	3. 83	4. 18	4. 11	4. 22	3. 99	4. 07	3. 84	3. 89
γ 144. 0	4. 16	4. 47	4. 11	4. 11	3. 82	4. 36	4. 41	4. 35	4. 08	4. 23	4. 16	4. 11
γ 145. 0	4. 25	4. 49	4. 12	4. 31	3. 87	4. 18	4. 52	4. 52	4. 26	4. 25	4. 05	4. 17
γ 146. 0	4. 55	4. 44	4. 22	4. 47	3. 91	4. 32	4. 39	4. 65	4. 43	4. 27	4. 20	4. 09
γ 147. 0	4. 63	4. 65	4. 31	4. 49	3. 95	4. 56	4. 32	4. 71	4. 45	4. 27	4. 22	4. 22
γ 148. 0	4. 74	4. 76	4. 26	4. 47	4. 18	4. 23	4. 47	4. 73	4. 65	4. 39	4. 30	3. 98
γ 149. 0	4. 60	4. 64	4. 59	4. 45	4. 36	4. 74	4. 59	4. 75	4. 58	4. 57	4. 43	4. 26
γ 150. 0	5. 07	4. 80	4. 68	4. 42	4. 38	4. 78	4. 86	4. 91	4. 70	4. 66	4. 43	4. 36
γ 151. 0	4. 95	4. 91	4. 67	4. 54	4. 46	4. 70	4. 57	5. 11	5. 00	4. 75	4. 43	4. 47
γ 152. 0	5. 19	5. 01	4. 83	4. 78	4. 64	4. 76	4. 55	5. 01	4. 66	4. 66	4. 45	4. 50
γ 153. 0	5. 23	5. 19	5. 00	4. 98	4. 80	4. 78	4. 74	5. 03	4. 80	4. 68	4. 81	4. 89
γ 154. 0	5. 34	5. 25	4. 93	5. 07	4. 84	4. 74	4. 91	5. 39	5. 04	4. 93	4. 80	4. 64
γ 155. 0	5. 43	5. 25	5. 00	4. 94	4. 84	4. 82	5. 15	5. 51	5. 10	5. 10	4. 88	4. 66
γ 156. 0	5. 66	5. 33	5. 10	5. 09	4. 83	4. 88	5. 18	5. 41	5. 23	5. 26	4. 87	4. 95
γ 157. 0	5. 59	5. 38	5. 38	5. 08	4. 82	5. 14	5. 28	5. 41	5. 07	5. 20	5. 03	5. 02
γ 158. 0	5. 73	5. 52	5. 23	5. 06	4. 88	5. 18	5. 18	5. 56	5. 37	5. 21	5. 24	5. 12
γ 159. 0	5. 68	5. 50	5. 32	5. 19	5. 04	4. 98	5. 17	5. 45	5. 28	5. 12	5. 37	5. 09
γ 160. 0	5. 42	5. 47	5. 22	5. 37	5. 06	4. 88	5. 42	5. 47	5. 52	5. 17	5. 50	5. 17
γ 161. 0	5. 69	5. 53	5. 38	5. 32	5. 13	5. 09	5. 49	5. 49	5. 33	5. 16	5. 32	5. 19
γ 162. 0	5. 93	5. 63	5. 03	5. 38	5. 35	5. 18	5. 62	5. 62	5. 50	5. 29	5. 38	5. 21
γ 163. 0	5. 79	5. 63	5. 26	5. 29	5. 43	5. 23	5. 38	5. 95	5. 42	5. 45	5. 52	5. 20
γ 164. 0	5. 93	5. 52	5. 68	5. 62	5. 35	5. 30	5. 52	5. 79	5. 56	5. 42	5. 47	5. 30
γ 165. 0	6. 08	5. 42	5. 49	5. 59	5. 39	5. 39	5. 52	5. 67	5. 51	5. 55	5. 55	5. 53
γ 166. 0	6. 23	5. 55	5. 49	5. 67	5. 55	5. 47	5. 76	5. 79	5. 76	5. 62	5. 71	5. 61
γ 167. 0	6. 26	5. 66	5. 41	5. 74	5. 67	5. 63	5. 82	5. 86	5. 83	5. 44	5. 88	5. 58
γ 168. 0	6. 34	5. 64	5. 51	5. 95	5. 68	5. 55	5. 88	6. 01	5. 78	5. 59	5. 89	5. 52
γ 169. 0	6. 24	5. 69	5. 63	5. 68	5. 72	5. 78	5. 83	6. 12	5. 79	5. 78	5. 94	5. 66
γ 170. 0	6. 22	5. 64	5. 61	5. 67	5. 91	5. 86	5. 92	6. 18	5. 91	6. 00	5. 98	5. 69
γ 171. 0	6. 17	5. 68	5. 82	5. 89	5. 92	5. 82	5. 97	6. 32	6. 02	6. 17	5. 96	5. 83
γ 172. 0	6. 40	5. 82	5. 84	5. 70	5. 77	6. 05	5. 90	6. 31	6. 11	6. 27	6. 05	5. 89
γ 173. 0	6. 24	6. 07	5. 73	5. 92	5. 78	5. 93	6. 02	6. 28	6. 32	6. 23	5. 98	5. 98
γ 174. 0	6. 03	6. 10	5. 80	5. 77	5. 89	5. 93	5. 94	6. 29	6. 41	6. 20	5. 82	5. 82
γ 175. 0	6. 13	6. 10	6. 13	5. 82	5. 97	6. 04	5. 97	6. 15	6. 41	6. 23	5. 97	5. 65
γ 176. 0	6. 32	6. 23	6. 11	6. 01	5. 84	6. 04	5. 86	6. 03	6. 51	6. 18	5. 86	5. 96
γ 177. 0	6. 27	6. 14	5. 99	6. 19	5. 80	6. 03	6. 04	6. 27	6. 46	6. 22	6. 16	5. 75
γ 178. 0	6. 71	6. 08	6. 23	5. 76	6. 05	6. 06	6. 05	6. 46	6. 63	6. 26	6. 27	6. 05
γ 179. 0	6. 53	6. 08	6. 12	5. 90	6. 15	5. 97	6. 28	6. 50	6. 55	6. 31	6. 03	6. 13
γ 180. 0	6. 24	6. 24	6. 24	6. 24	6. 24	6. 24	6. 24	6. 24	6. 24	6. 24	6. 24	6. 24
V/H	C270. 0	C292. 5	C315. 0	C337. 5								
γ 0. 0	1756. 59	1756. 59	1756. 59	1756. 59								
γ 1. 0	1752. 88	1742. 79	1721. 07	1717. 23								
γ 2. 0	1747. 97	1737. 48	1715. 72	1712. 59								
γ 3. 0	1741. 05	1730. 37	1708. 48	1705. 88								
γ 4. 0	1731. 76	1721. 03	1698. 67	1696. 69								
γ 5. 0	1719. 56	1708. 43	1686. 72	1684. 69								

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 6. 0	1704. 14	1692. 67	1671. 59	1669. 52
γ 7. 0	1685. 58	1674. 27	1653. 18	1651. 17
γ 8. 0	1663. 18	1651. 77	1632. 00	1629. 19
γ 9. 0	1636. 80	1625. 25	1606. 87	1602. 98
γ 10. 0	1606. 39	1595. 21	1577. 68	1573. 05
γ 11. 0	1571. 38	1560. 77	1545. 17	1539. 49
γ 12. 0	1532. 26	1522. 33	1508. 23	1501. 42
γ 13. 0	1488. 70	1479. 97	1466. 99	1458. 89
γ 14. 0	1439. 55	1432. 52	1420. 56	1411. 13
γ 15. 0	1384. 53	1378. 85	1368. 27	1357. 42
γ 16. 0	1323. 75	1319. 86	1310. 63	1297. 54
γ 17. 0	1257. 66	1256. 77	1248. 69	1232. 74
γ 18. 0	1186. 98	1188. 73	1182. 96	1164. 36
γ 19. 0	1112. 79	1116. 50	1113. 36	1093. 23
γ 20. 0	1034. 65	1038. 42	1038. 71	1019. 85
γ 21. 0	953. 58	957. 19	960. 92	944. 85
γ 22. 0	871. 77	873. 18	880. 55	868. 83
γ 23. 0	789. 17	789. 55	799. 14	791. 02
γ 24. 0	705. 90	705. 95	718. 50	712. 76
γ 25. 0	623. 07	623. 26	639. 08	635. 47
γ 26. 0	542. 69	543. 03	561. 89	559. 17
γ 27. 0	466. 13	467. 91	488. 91	485. 94
γ 28. 0	394. 87	397. 93	420. 83	417. 80
γ 29. 0	330. 96	335. 00	358. 63	355. 59
γ 30. 0	274. 47	279. 04	302. 81	299. 76
γ 31. 0	225. 61	230. 44	253. 18	250. 53
γ 32. 0	184. 45	189. 13	209. 82	207. 71
γ 33. 0	150. 33	154. 81	172. 97	171. 23
γ 34. 0	122. 74	126. 82	142. 21	140. 91
γ 35. 0	100. 06	103. 58	116. 99	115. 73
γ 36. 0	81. 18	84. 70	96. 00	95. 07
γ 37. 0	65. 61	68. 60	78. 67	77. 88
γ 38. 0	52. 52	55. 18	63. 76	63. 15
γ 39. 0	41. 86	44. 15	51. 51	50. 68
γ 40. 0	33. 71	35. 46	41. 39	40. 75
γ 41. 0	27. 80	29. 11	33. 75	33. 28
γ 42. 0	23. 20	24. 27	28. 10	27. 68
γ 43. 0	18. 83	19. 87	23. 06	23. 11
γ 44. 0	15. 00	15. 98	18. 55	18. 94
γ 45. 0	12. 07	12. 71	14. 67	15. 30
γ 46. 0	9. 98	10. 44	11. 70	12. 39
γ 47. 0	8. 64	8. 84	9. 63	10. 20
γ 48. 0	7. 90	7. 89	8. 24	8. 71
γ 49. 0	7. 38	7. 42	7. 31	7. 85
γ 50. 0	6. 90	7. 03	7. 07	7. 41
γ 51. 0	6. 35	6. 41	6. 47	7. 01
γ 52. 0	5. 81	6. 08	6. 16	6. 35

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 53. 0	5. 32	5. 75	5. 83	5. 82
γ 54. 0	5. 01	5. 37	5. 34	5. 46
γ 55. 0	4. 75	4. 89	4. 89	5. 03
γ 56. 0	4. 59	4. 77	4. 79	4. 58
γ 57. 0	4. 54	4. 42	4. 28	4. 37
γ 58. 0	4. 18	4. 37	4. 32	4. 33
γ 59. 0	3. 89	4. 19	4. 37	4. 09
γ 60. 0	3. 62	4. 01	4. 10	3. 79
γ 61. 0	3. 37	3. 72	3. 76	3. 71
γ 62. 0	3. 08	3. 48	3. 62	3. 57
γ 63. 0	2. 89	3. 28	3. 49	3. 27
γ 64. 0	2. 73	3. 15	3. 30	3. 18
γ 65. 0	2. 44	2. 73	3. 09	3. 02
γ 66. 0	2. 22	2. 51	2. 68	2. 81
γ 67. 0	2. 22	2. 38	2. 56	2. 56
γ 68. 0	2. 23	2. 25	2. 65	2. 32
γ 69. 0	2. 05	2. 02	2. 50	2. 28
γ 70. 0	2. 12	2. 26	2. 49	2. 38
γ 71. 0	2. 07	2. 00	2. 53	2. 26
γ 72. 0	1. 99	2. 04	2. 71	2. 18
γ 73. 0	2. 04	2. 01	2. 16	2. 20
γ 74. 0	2. 11	2. 04	2. 28	2. 14
γ 75. 0	2. 06	1. 92	2. 15	2. 16
γ 76. 0	1. 99	2. 02	2. 24	2. 25
γ 77. 0	1. 93	2. 09	2. 39	2. 27
γ 78. 0	1. 84	2. 11	2. 67	2. 19
γ 79. 0	2. 01	2. 15	2. 75	2. 22
γ 80. 0	2. 16	2. 06	2. 61	2. 25
γ 81. 0	2. 16	2. 45	2. 55	2. 24
γ 82. 0	2. 20	2. 30	2. 48	2. 33
γ 83. 0	2. 19	2. 42	2. 72	2. 51
γ 84. 0	2. 31	2. 35	2. 76	2. 53
γ 85. 0	2. 58	2. 31	2. 68	2. 53
γ 86. 0	2. 51	2. 39	2. 91	2. 56
γ 87. 0	2. 44	2. 45	2. 77	2. 55
γ 88. 0	2. 66	2. 56	3. 07	2. 68
γ 89. 0	2. 75	2. 55	3. 15	2. 80
γ 90. 0	2. 68	2. 63	3. 02	2. 87
γ 91. 0	2. 69	2. 80	3. 26	2. 94
γ 92. 0	2. 80	2. 81	3. 13	3. 02
γ 93. 0	2. 86	2. 64	3. 24	3. 05
γ 94. 0	2. 87	2. 88	3. 35	3. 06
γ 95. 0	2. 85	3. 11	3. 29	3. 05
γ 96. 0	2. 74	2. 86	3. 08	3. 11
γ 97. 0	2. 75	2. 82	3. 11	3. 14
γ 98. 0	2. 91	2. 80	3. 31	3. 11
γ 99. 0	3. 05	2. 92	3. 25	2. 97

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 100.0	3.17	2.97	3.38	3.04
γ 101.0	3.16	2.89	3.26	3.17
γ 102.0	3.23	2.88	3.26	3.16
γ 103.0	3.38	2.88	3.28	3.29
γ 104.0	3.33	2.82	3.32	3.24
γ 105.0	3.24	3.09	3.30	3.21
γ 106.0	3.24	2.99	3.29	3.34
γ 107.0	3.17	2.95	3.53	3.45
γ 108.0	3.20	3.03	3.45	3.41
γ 109.0	3.14	3.03	3.46	3.31
γ 110.0	3.18	3.23	3.25	3.14
γ 111.0	3.33	3.28	3.50	3.08
γ 112.0	3.28	3.08	3.51	3.17
γ 113.0	3.28	3.18	3.17	3.28
γ 114.0	3.37	3.29	3.42	3.28
γ 115.0	3.33	3.31	3.47	3.22
γ 116.0	3.30	3.17	3.52	3.18
γ 117.0	3.37	3.23	3.57	3.31
γ 118.0	3.39	3.25	3.47	3.52
γ 119.0	3.36	3.19	3.29	3.72
γ 120.0	3.18	3.40	3.46	3.77
γ 121.0	3.15	3.18	3.37	3.65
γ 122.0	3.16	3.09	3.41	3.67
γ 123.0	3.07	3.23	3.58	3.56
γ 124.0	3.11	2.99	3.80	3.47
γ 125.0	3.14	3.16	3.47	3.52
γ 126.0	3.26	3.13	3.46	3.51
γ 127.0	3.37	3.35	3.53	3.55
γ 128.0	3.36	3.11	3.58	3.60
γ 129.0	3.51	3.15	3.61	3.64
γ 130.0	3.74	3.17	3.83	3.68
γ 131.0	3.74	3.41	3.97	3.59
γ 132.0	3.60	3.45	3.76	3.56
γ 133.0	3.56	3.56	3.76	3.69
γ 134.0	3.70	3.67	3.83	3.72
γ 135.0	3.65	3.75	3.89	3.85
γ 136.0	3.67	3.81	3.79	4.01
γ 137.0	3.71	3.66	3.86	3.97
γ 138.0	3.69	3.70	3.80	3.99
γ 139.0	3.88	3.89	3.92	3.85
γ 140.0	3.90	3.91	4.07	3.74
γ 141.0	3.93	3.84	4.28	3.92
γ 142.0	3.96	4.18	4.14	4.21
γ 143.0	4.05	4.03	4.06	4.39
γ 144.0	4.07	3.91	3.85	4.46
γ 145.0	4.15	4.07	3.84	4.46
γ 146.0	4.36	4.13	4.13	4.57

IES Indoor Report

Photometric Filename:AW12540 15W 1204C9 3090 ZHT35-36D 350.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 147. 0	4. 39	4. 30	4. 26	4. 78
γ 148. 0	4. 35	4. 17	4. 34	4. 88
γ 149. 0	4. 35	4. 36	4. 12	5. 02
γ 150. 0	4. 57	4. 50	4. 52	5. 19
γ 151. 0	4. 79	4. 40	4. 72	5. 34
γ 152. 0	4. 73	4. 50	4. 75	5. 56
γ 153. 0	4. 70	4. 80	4. 96	5. 87
γ 154. 0	4. 74	4. 75	5. 79	6. 09
γ 155. 0	4. 89	4. 83	5. 89	6. 10
γ 156. 0	4. 96	4. 81	5. 67	5. 52
γ 157. 0	4. 89	4. 85	5. 40	5. 14
γ 158. 0	4. 95	4. 95	5. 52	5. 66
γ 159. 0	5. 00	4. 81	5. 42	5. 63
γ 160. 0	4. 95	5. 07	5. 44	5. 35
γ 161. 0	5. 00	5. 16	5. 51	5. 41
γ 162. 0	5. 13	5. 36	5. 48	5. 41
γ 163. 0	5. 21	5. 39	5. 45	5. 52
γ 164. 0	5. 44	5. 43	5. 77	5. 74
γ 165. 0	5. 53	5. 44	5. 61	5. 86
γ 166. 0	5. 56	5. 53	5. 39	5. 87
γ 167. 0	5. 79	5. 64	5. 46	5. 85
γ 168. 0	5. 83	5. 63	5. 54	5. 92
γ 169. 0	5. 81	5. 72	5. 54	5. 96
γ 170. 0	5. 68	5. 63	5. 66	6. 01
γ 171. 0	5. 69	5. 82	5. 79	6. 09
γ 172. 0	5. 86	5. 98	5. 68	6. 22
γ 173. 0	5. 81	5. 90	5. 66	6. 38
γ 174. 0	5. 93	6. 11	5. 72	6. 55
γ 175. 0	6. 07	6. 05	5. 64	6. 65
γ 176. 0	5. 95	6. 00	5. 99	6. 55
γ 177. 0	5. 89	5. 91	5. 92	6. 55
γ 178. 0	6. 05	6. 01	6. 00	6. 72
γ 179. 0	6. 11	5. 84	6. 08	6. 85
γ 180. 0	6. 24	6. 24	6. 24	6. 24
