

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES



Indoor Luminaire Photometric Data

Description Information

Luminary Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Date: 2023/06/30
Manufacture:	Shld. Ang(°):60	Test Machine:GON-2000
Test Lab: Test	Frequency(Hz):50	Lamp CCT(K): 3000 Ra: 90
Lum. Size(W*L*H):0.066m*0.066m*0.000m	Lum. Area(m2):0.003	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=22.5 γ =1.0	Temp. (°C): 25
		Humidity(%): 50.0

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 602.000	Luminary Flux(lm): 602.928	Field Angle(10%Imax): 73.7(°)	
Rated Power(W): 8	Luminary Efficiency: 100.15%	Down Lumens&Percent: 588.846lm 97.66%	
Rated Voltage(V): 220	Luminary EER(lm/W): 72.363	Up Lumens&Percent: 14.082lm 2.34%	
Tested Power(W): 8.332	Max. Candela(cd): 1002.662	S/MH: C0_a180=0.716 C90_270=0.715	
Lamps' Inside: 1	Max Cand@Ang.(°): C=0.0 γ =1.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf):220.6, 0.065, 0.576	Beam Angle(50%Imax): 44.3(°)	ErP Φ use(90°): 564.715lm	
Lamp Size(W*L*H):0.066m*0.066m*0.000m	Left=-21.4°, Right=22.9°	IRF(%): 354.596	

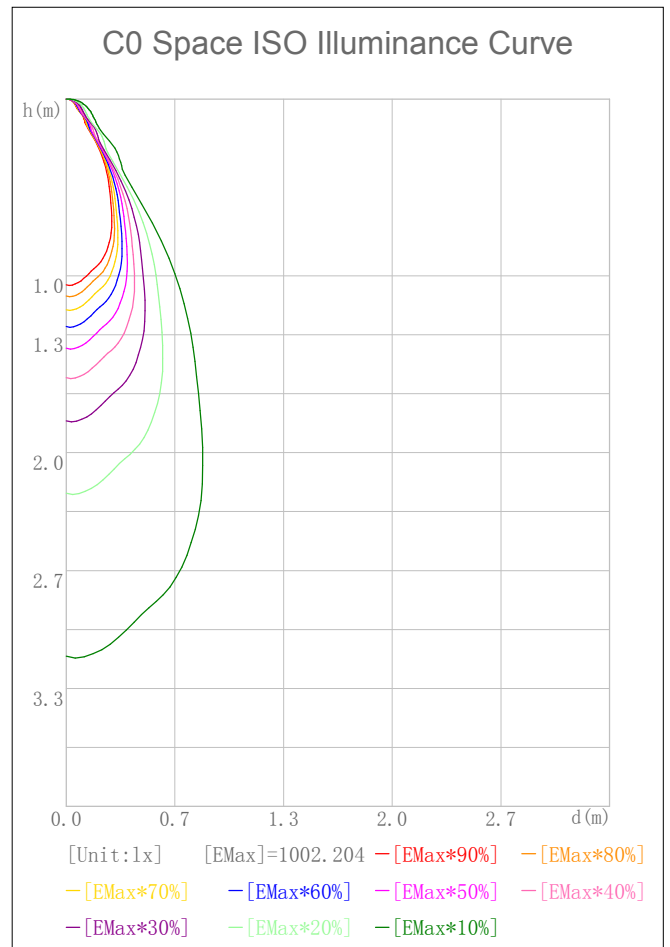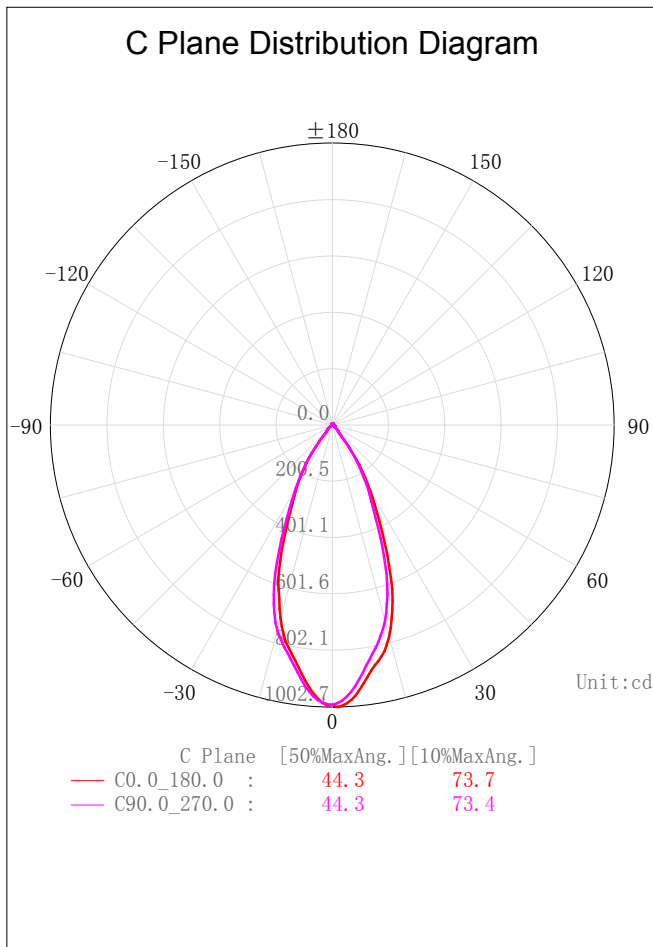



IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

2D Plane Light Intensity Distribution Curve

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30

C Plane Distribution Diagram

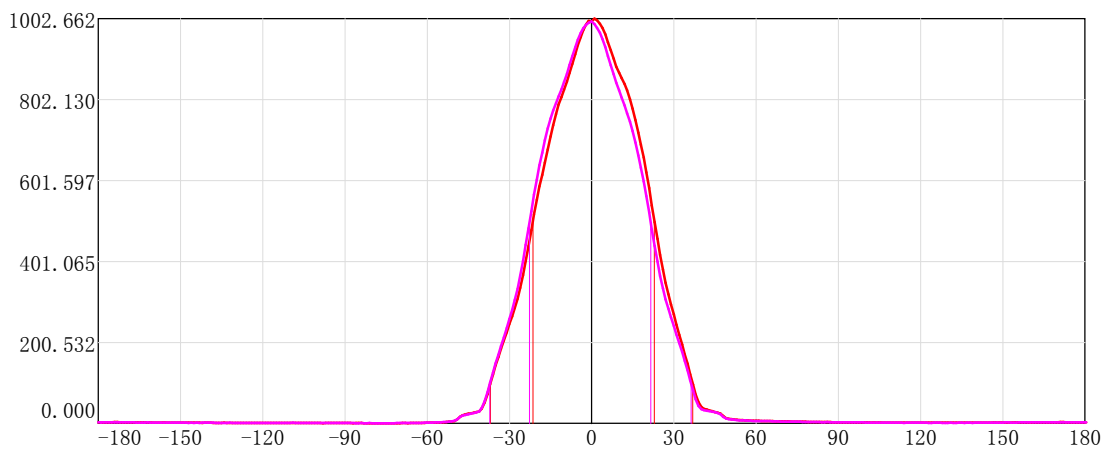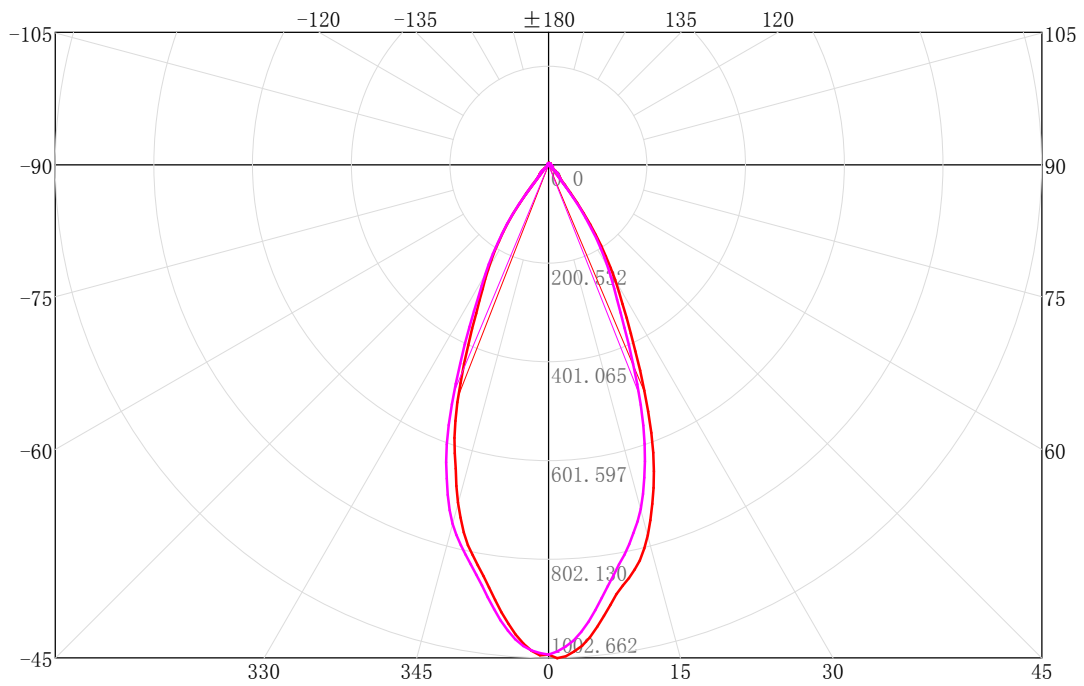

	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
—	C0.0_180.0 :	44.3	73.7	
—	C90.0_270.0 :	44.3	73.4	


IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

3D Light Intensity Distribution Modal

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30

3D Light Intensity Distribution Modal

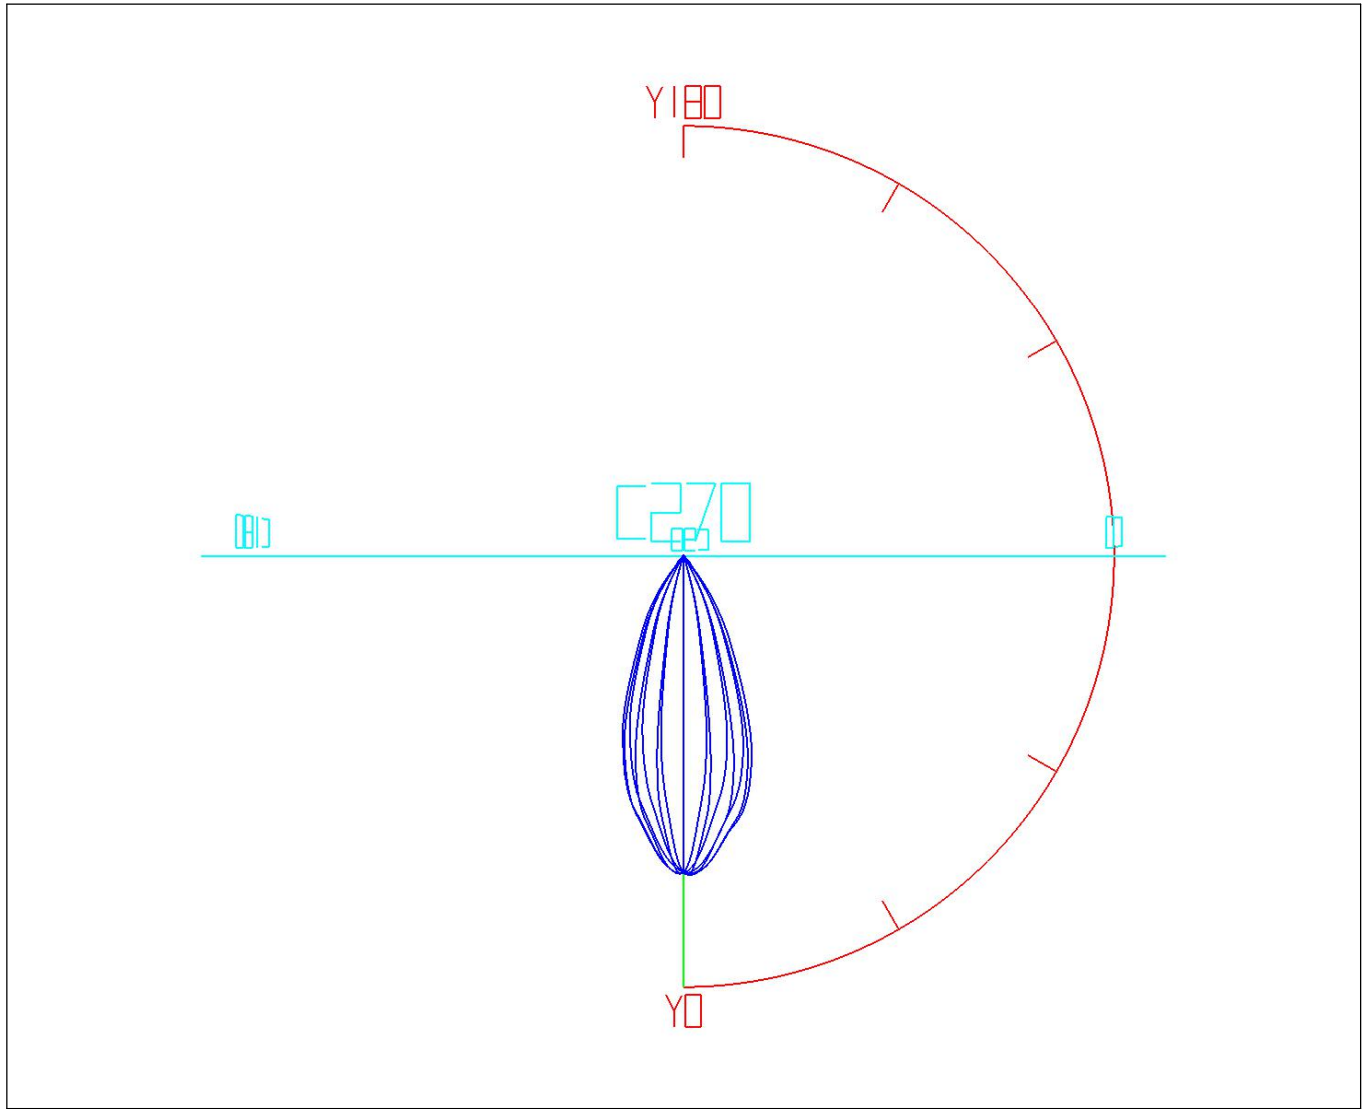

Curves: 3D Model ——— Fixture ——— Vert. HUD ——— Hori. HUD ———
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.95	0.95	0.16	0.16	47.0-48.0	1.58	571.92	0.26	95.00
1.0-2.0	2.84	3.79	0.47	0.63	48.0-49.0	1.19	573.11	0.20	95.20
2.0-3.0	4.69	8.49	0.78	1.41	49.0-50.0	0.87	573.99	0.15	95.35
3.0-4.0	6.49	14.97	1.08	2.49	50.0-51.0	0.72	574.71	0.12	95.47
4.0-5.0	8.20	23.17	1.36	3.85	51.0-52.0	0.64	575.35	0.11	95.57
5.0-6.0	9.81	32.98	1.63	5.48	52.0-53.0	0.60	575.94	0.10	95.67
6.0-7.0	11.33	44.30	1.88	7.36	53.0-54.0	0.55	576.50	0.09	95.76
7.0-8.0	12.74	57.05	2.12	9.48	54.0-55.0	0.52	577.02	0.09	95.85
8.0-9.0	14.09	71.13	2.34	11.82	55.0-56.0	0.50	577.52	0.08	95.93
9.0-10.0	15.37	86.51	2.55	14.37	56.0-57.0	0.48	578.00	0.08	96.01
10.0-11.0	16.60	103.11	2.76	17.13	57.0-58.0	0.47	578.46	0.08	96.09
11.0-12.0	17.78	120.89	2.95	20.08	58.0-59.0	0.45	578.91	0.07	96.16
12.0-13.0	18.86	139.75	3.13	23.21	59.0-60.0	0.44	579.35	0.07	96.24
13.0-14.0	19.81	159.56	3.29	26.51	60.0-61.0	0.42	579.77	0.07	96.31
14.0-15.0	20.62	180.18	3.43	29.93	61.0-62.0	0.41	580.18	0.07	96.38
15.0-16.0	21.26	201.44	3.53	33.46	62.0-63.0	0.40	580.58	0.07	96.44
16.0-17.0	21.70	223.14	3.60	37.07	63.0-64.0	0.40	580.98	0.07	96.51
17.0-18.0	21.99	245.12	3.65	40.72	64.0-65.0	0.39	581.36	0.06	96.57
18.0-19.0	22.12	267.25	3.68	44.39	65.0-66.0	0.38	581.74	0.06	96.63
19.0-20.0	22.05	289.30	3.66	48.06	66.0-67.0	0.37	582.11	0.06	96.70
20.0-21.0	21.72	311.02	3.61	51.66	67.0-68.0	0.36	582.47	0.06	96.76
21.0-22.0	21.12	332.14	3.51	55.17	68.0-69.0	0.35	582.82	0.06	96.81
22.0-23.0	20.32	352.46	3.38	58.55	69.0-70.0	0.34	583.16	0.06	96.87
23.0-24.0	19.40	371.86	3.22	61.77	70.0-71.0	0.34	583.50	0.06	96.93
24.0-25.0	18.44	390.30	3.06	64.83	71.0-72.0	0.33	583.83	0.05	96.98
25.0-26.0	17.46	407.76	2.90	67.73	72.0-73.0	0.32	584.15	0.05	97.03
26.0-27.0	16.54	424.30	2.75	70.48	73.0-74.0	0.31	584.45	0.05	97.09
27.0-28.0	15.71	440.01	2.61	73.09	74.0-75.0	0.30	584.76	0.05	97.14
28.0-29.0	14.96	454.97	2.48	75.58	75.0-76.0	0.30	585.06	0.05	97.19
29.0-30.0	14.23	469.19	2.36	77.94	76.0-77.0	0.29	585.35	0.05	97.23
30.0-31.0	13.44	482.63	2.23	80.17	77.0-78.0	0.29	585.64	0.05	97.28
31.0-32.0	12.57	495.20	2.09	82.26	78.0-79.0	0.28	585.92	0.05	97.33
32.0-33.0	11.64	506.84	1.93	84.19	79.0-80.0	0.28	586.21	0.05	97.38
33.0-34.0	10.64	517.48	1.77	85.96	80.0-81.0	0.28	586.49	0.05	97.42
34.0-35.0	9.54	527.02	1.59	87.55	81.0-82.0	0.27	586.76	0.05	97.47
35.0-36.0	8.32	535.34	1.38	88.93	82.0-83.0	0.27	587.03	0.04	97.51
36.0-37.0	6.95	542.29	1.15	90.08	83.0-84.0	0.27	587.29	0.04	97.56
37.0-38.0	5.51	547.80	0.92	91.00	84.0-85.0	0.27	587.56	0.04	97.60
38.0-39.0	4.18	551.98	0.69	91.69	85.0-86.0	0.27	587.83	0.04	97.65
39.0-40.0	3.15	555.13	0.52	92.21	86.0-87.0	0.26	588.09	0.04	97.69
40.0-41.0	2.56	557.69	0.43	92.64	87.0-88.0	0.26	588.34	0.04	97.73
41.0-42.0	2.33	560.01	0.39	93.03	88.0-89.0	0.25	588.60	0.04	97.77
42.0-43.0	2.23	562.25	0.37	93.40	89.0-90.0	0.25	588.85	0.04	97.82
43.0-44.0	2.16	564.41	0.36	93.76	90.0-91.0	0.25	589.09	0.04	97.86
44.0-45.0	2.09	566.50	0.35	94.10	91.0-92.0	0.25	589.34	0.04	97.90
45.0-46.0	1.99	568.49	0.33	94.43	92.0-93.0	0.25	589.59	0.04	97.94
46.0-47.0	1.85	570.34	0.31	94.74	93.0-94.0	0.25	589.84	0.04	97.98

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Zonal Flux Tabulation - (Cont.)


Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.25	590.08	0.04	98.02	141.0-142.0	0.16	599.25	0.03	99.54
95.0-96.0	0.24	590.33	0.04	98.06	142.0-143.0	0.16	599.41	0.03	99.57
96.0-97.0	0.24	590.57	0.04	98.10	143.0-144.0	0.16	599.57	0.03	99.60
97.0-98.0	0.24	590.81	0.04	98.14	144.0-145.0	0.16	599.72	0.03	99.62
98.0-99.0	0.24	591.05	0.04	98.18	145.0-146.0	0.15	599.87	0.03	99.65
99.0-100.0	0.24	591.28	0.04	98.22	146.0-147.0	0.15	600.03	0.03	99.67
100.0-101.0	0.24	591.52	0.04	98.26	147.0-148.0	0.15	600.17	0.02	99.70
101.0-102.0	0.23	591.75	0.04	98.30	148.0-149.0	0.15	600.32	0.02	99.72
102.0-103.0	0.23	591.98	0.04	98.34	149.0-150.0	0.14	600.47	0.02	99.75
103.0-104.0	0.23	592.21	0.04	98.37	150.0-151.0	0.14	600.61	0.02	99.77
104.0-105.0	0.23	592.44	0.04	98.41	151.0-152.0	0.14	600.74	0.02	99.79
105.0-106.0	0.22	592.66	0.04	98.45	152.0-153.0	0.13	600.88	0.02	99.81
106.0-107.0	0.21	592.87	0.04	98.48	153.0-154.0	0.13	601.01	0.02	99.84
107.0-108.0	0.22	593.09	0.04	98.52	154.0-155.0	0.13	601.14	0.02	99.86
108.0-109.0	0.22	593.31	0.04	98.56	155.0-156.0	0.13	601.27	0.02	99.88
109.0-110.0	0.21	593.52	0.04	98.59	156.0-157.0	0.12	601.39	0.02	99.90
110.0-111.0	0.21	593.73	0.03	98.63	157.0-158.0	0.12	601.51	0.02	99.92
111.0-112.0	0.21	593.94	0.03	98.66	158.0-159.0	0.12	601.63	0.02	99.94
112.0-113.0	0.20	594.14	0.03	98.69	159.0-160.0	0.11	601.74	0.02	99.96
113.0-114.0	0.20	594.34	0.03	98.73	160.0-161.0	0.11	601.84	0.02	99.97
114.0-115.0	0.20	594.54	0.03	98.76	161.0-162.0	0.10	601.95	0.02	99.99
115.0-116.0	0.20	594.74	0.03	98.79	162.0-163.0	0.10	602.05	0.02	100.01
116.0-117.0	0.19	594.93	0.03	98.83	163.0-164.0	0.10	602.14	0.02	100.02
117.0-118.0	0.19	595.12	0.03	98.86	164.0-165.0	0.09	602.23	0.02	100.04
118.0-119.0	0.19	595.31	0.03	98.89	165.0-166.0	0.09	602.32	0.01	100.05
119.0-120.0	0.19	595.50	0.03	98.92	166.0-167.0	0.08	602.40	0.01	100.07
120.0-121.0	0.19	595.68	0.03	98.95	167.0-168.0	0.08	602.48	0.01	100.08
121.0-122.0	0.19	595.87	0.03	98.98	168.0-169.0	0.07	602.55	0.01	100.09
122.0-123.0	0.18	596.05	0.03	99.01	169.0-170.0	0.07	602.61	0.01	100.10
123.0-124.0	0.18	596.23	0.03	99.04	170.0-171.0	0.06	602.67	0.01	100.11
124.0-125.0	0.18	596.41	0.03	99.07	171.0-172.0	0.05	602.72	0.01	100.12
125.0-126.0	0.18	596.59	0.03	99.10	172.0-173.0	0.05	602.77	0.01	100.13
126.0-127.0	0.18	596.77	0.03	99.13	173.0-174.0	0.04	602.81	0.01	100.13
127.0-128.0	0.18	596.94	0.03	99.16	174.0-175.0	0.03	602.85	0.01	100.14
128.0-129.0	0.18	597.12	0.03	99.19	175.0-176.0	0.03	602.88	0.00	100.15
129.0-130.0	0.17	597.29	0.03	99.22	176.0-177.0	0.02	602.90	0.00	100.15
130.0-131.0	0.17	597.46	0.03	99.25	177.0-178.0	0.02	602.91	0.00	100.15
131.0-132.0	0.17	597.63	0.03	99.27	178.0-179.0	0.01	602.92	0.00	100.15
132.0-133.0	0.17	597.80	0.03	99.30	179.0-180.0	0.00	602.93	0.00	100.15
133.0-134.0	0.17	597.97	0.03	99.33					
134.0-135.0	0.16	598.13	0.03	99.36					
135.0-136.0	0.16	598.29	0.03	99.38					
136.0-137.0	0.16	598.45	0.03	99.41					
137.0-138.0	0.16	598.61	0.03	99.44					
138.0-139.0	0.16	598.77	0.03	99.46					
139.0-140.0	0.16	598.93	0.03	99.49					
140.0-141.0	0.16	599.09	0.03	99.52					

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Rectangle ISO Lighting Intensity Diagram

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30

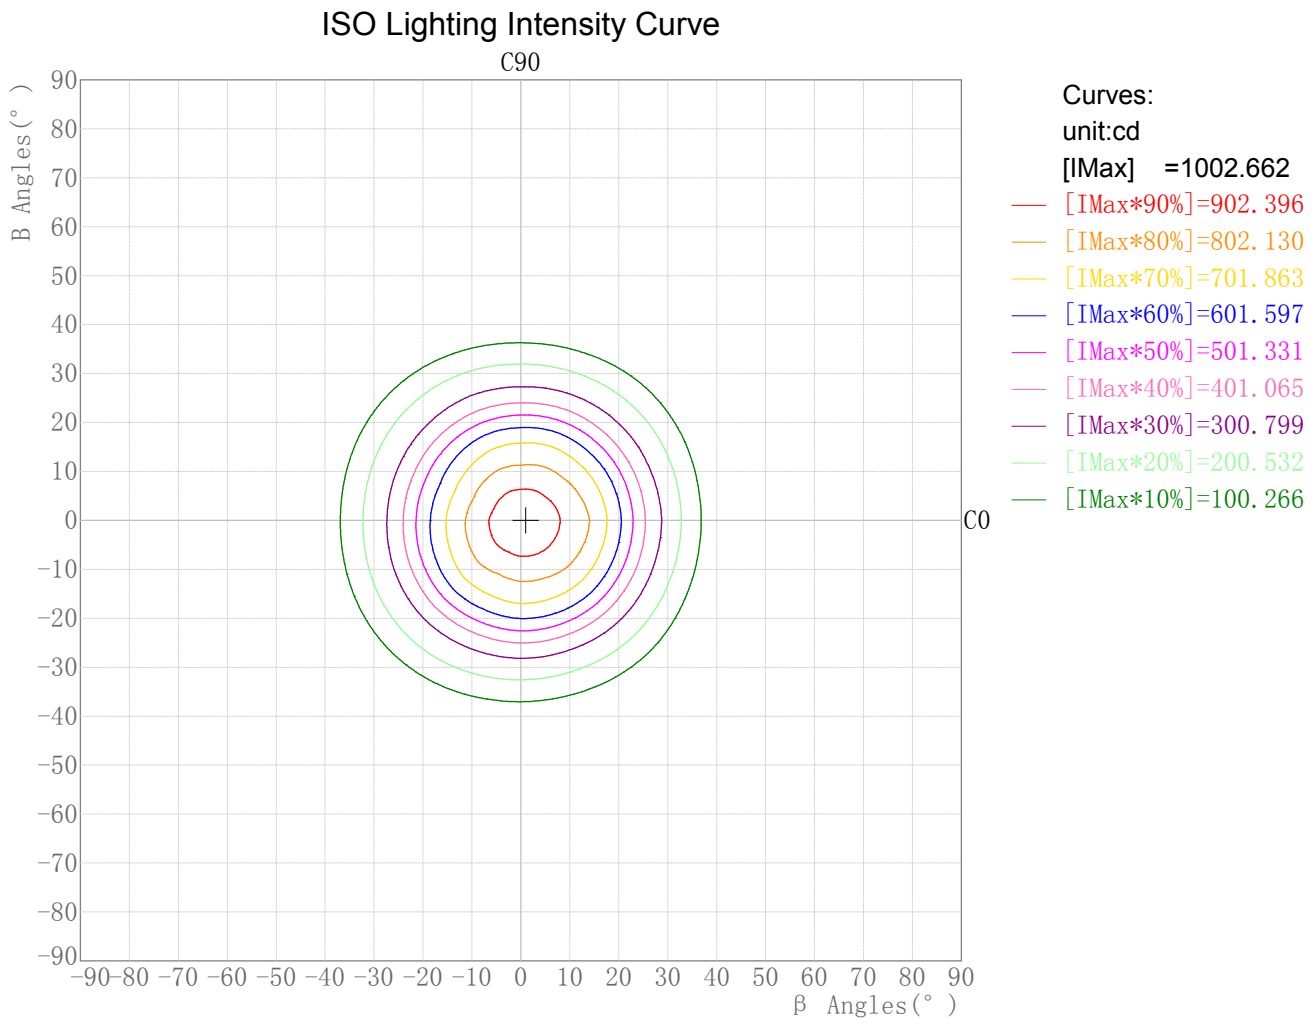


IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Round ISO Lighting Intensity Diagram

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30

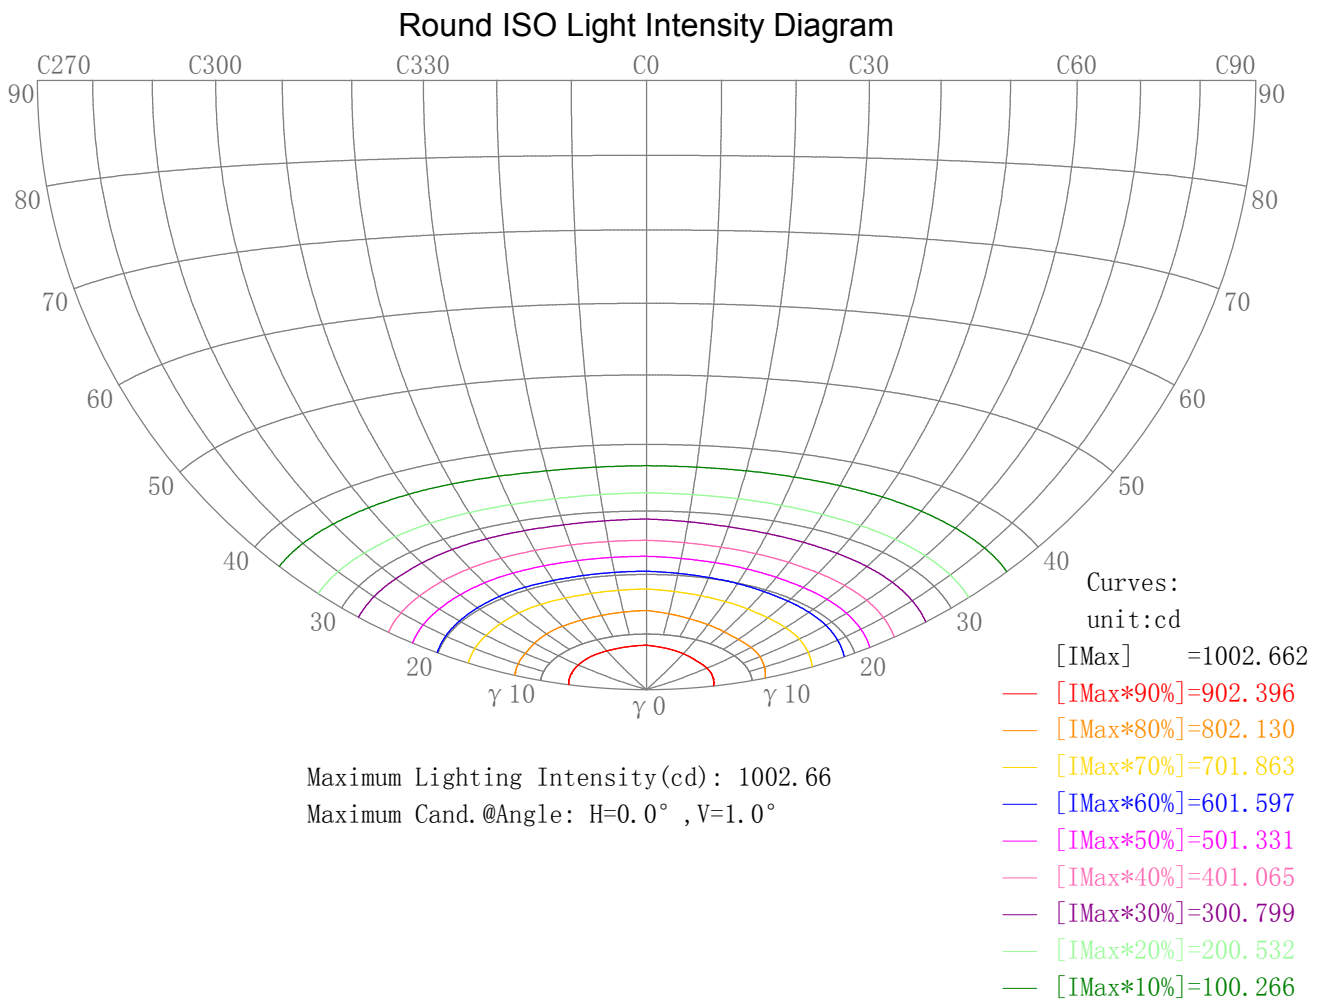


IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Plane ISO-Illuminance Diagram

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2023/06/30

Plane ISO-Illuminance Curve

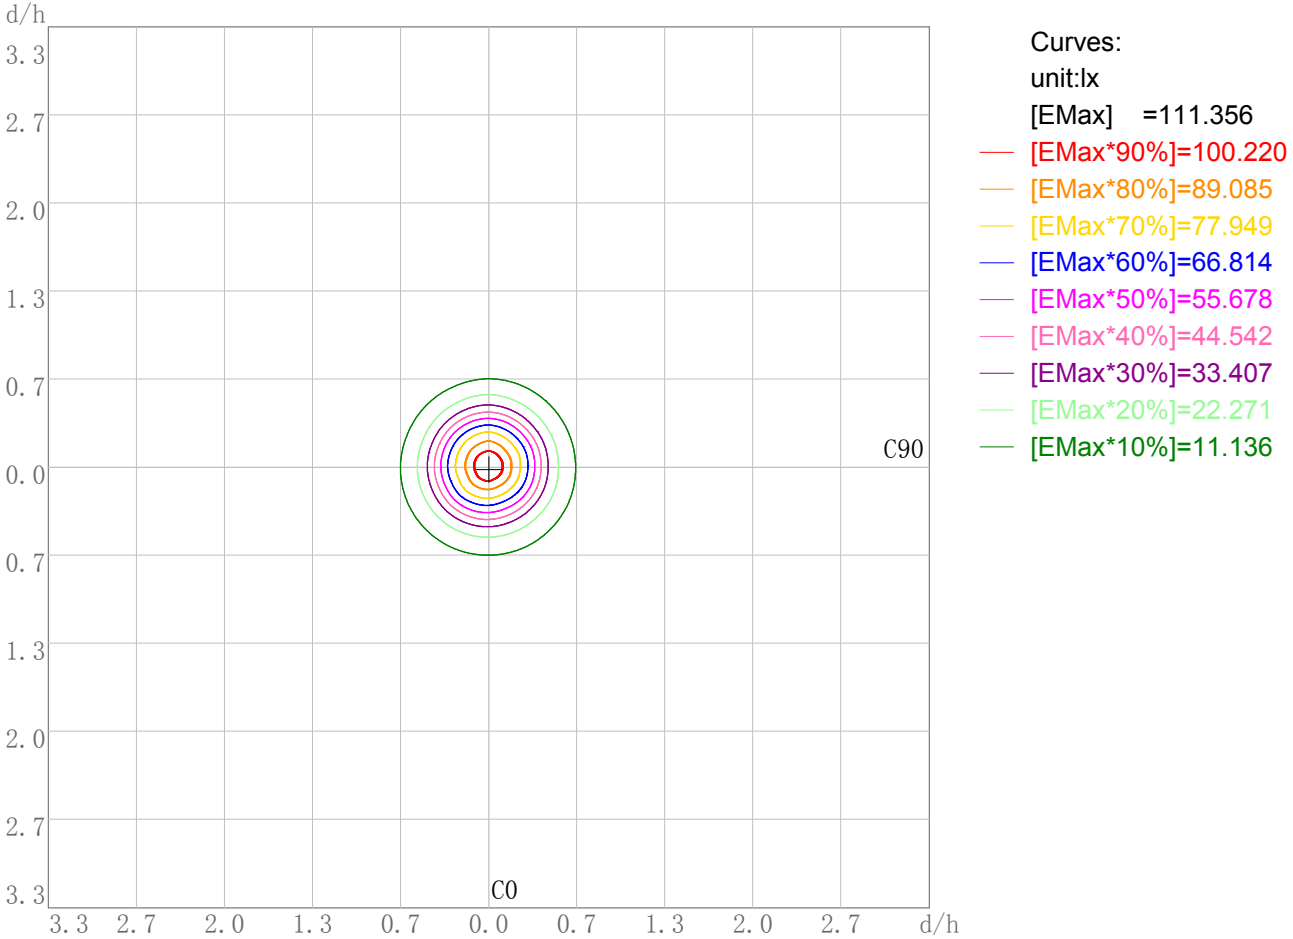

Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 111.36
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0


IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

3D Plane ISO Illuminance Diagram

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30

3D Plane Illuminance Modal

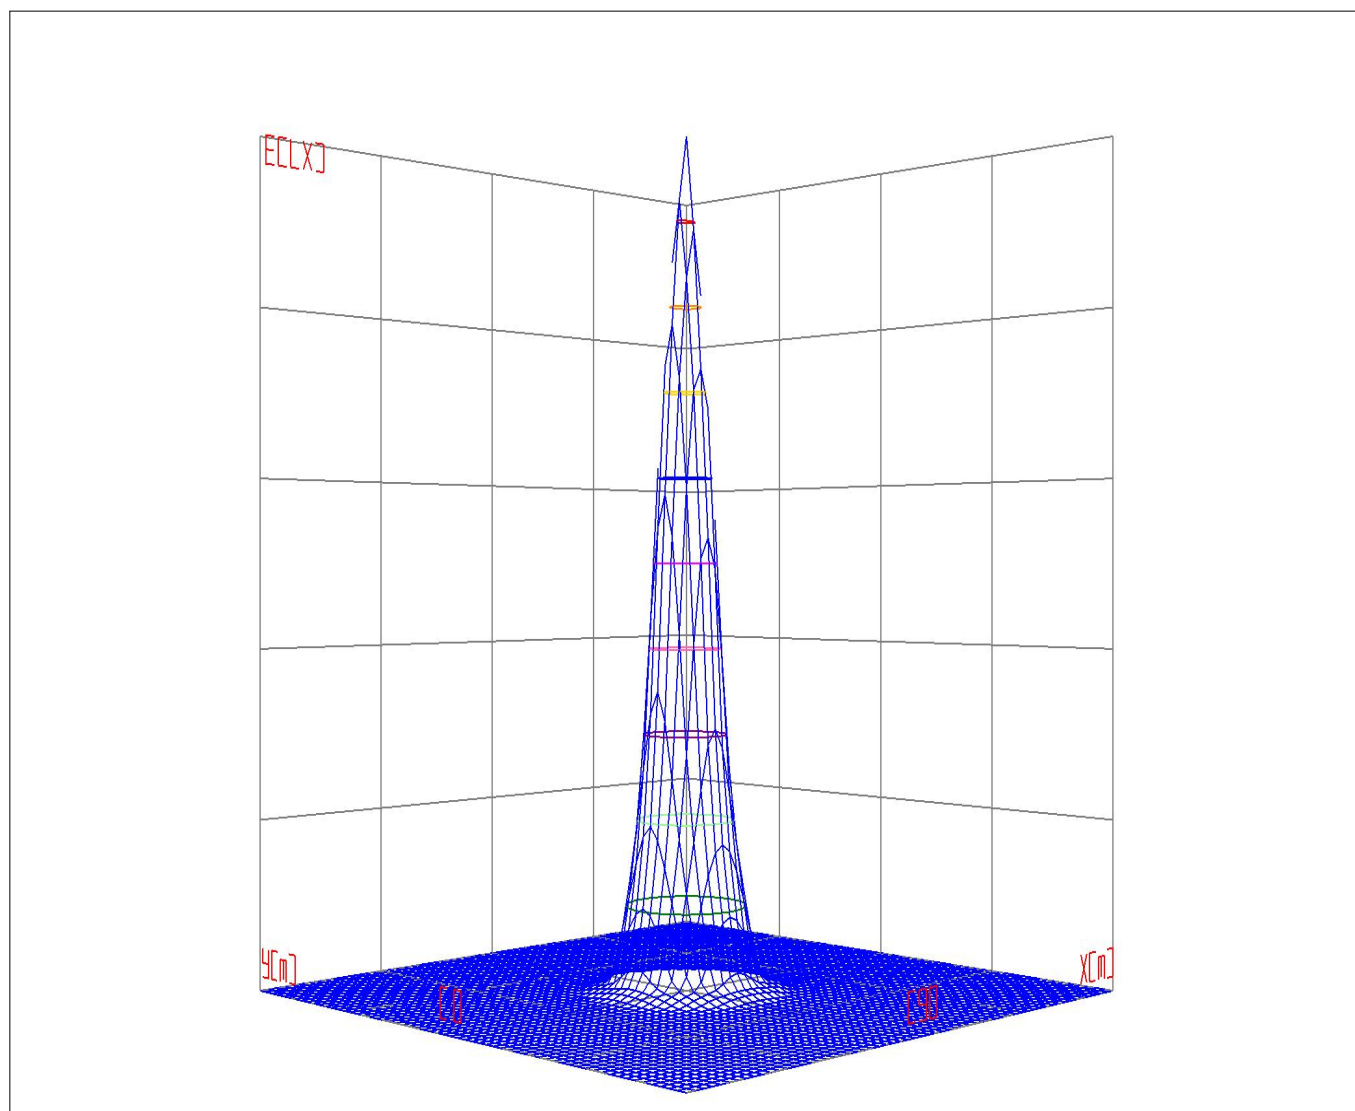

Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0


IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Space ISO Illuminance Diagram

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2023/06/30

Space ISO Illuminance Curve

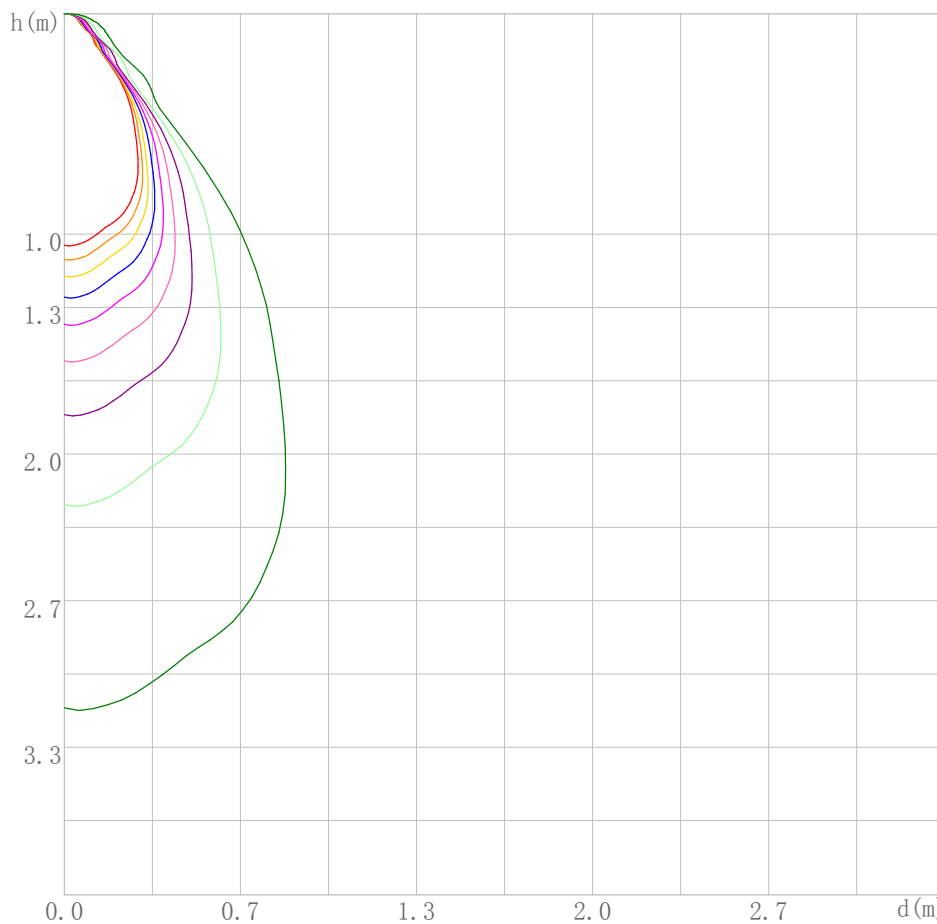

- Curves:
[Unit: lx]
[EMax] =1002.204
- [EMax*90%]=901.984
 - [EMax*80%]=801.763
 - [EMax*70%]=701.543
 - [EMax*60%]=601.322
 - [EMax*50%]=501.102
 - [EMax*40%]=400.882
 - [EMax*30%]=300.661
 - [EMax*20%]=200.441
 - [EMax*10%]=100.220

Space Plane Maximum Illuminance and @Angle:1002.20lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:1002.662cd,0deg


IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Illuminance-Distance Diagram

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30

Illuminance-Distance Curve

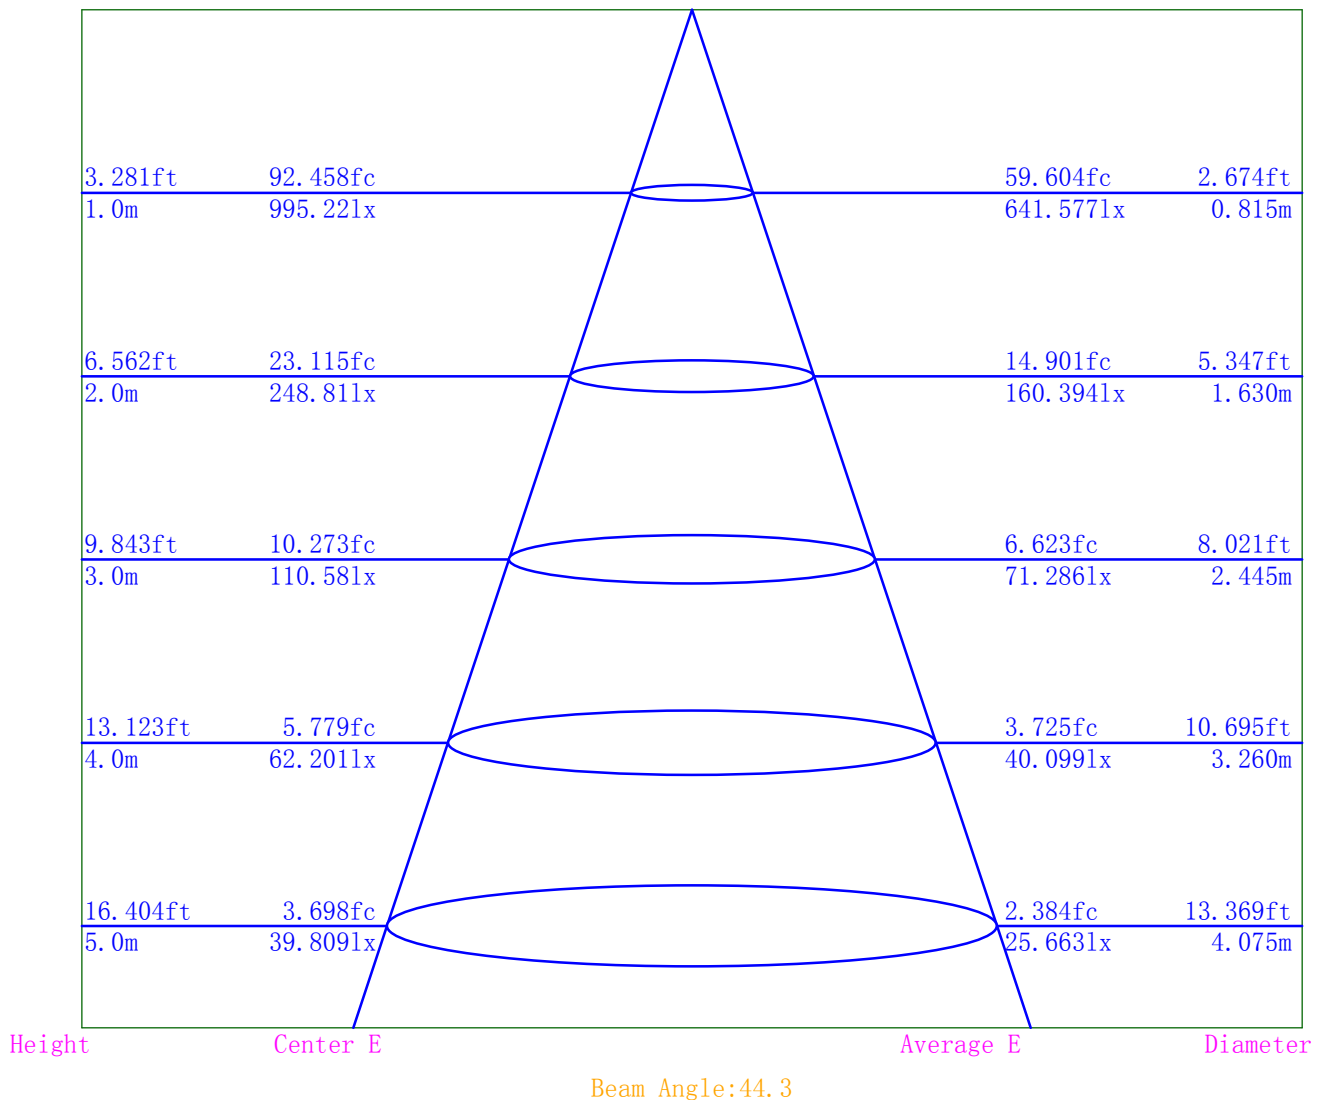

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Indoor Luminance Limiting Curves

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	11947	5345	4328	4199	4430	4763	5149	6922	12731
C90	11664	4947	4040	3937	4163	4394	5099	6797	11651

Luminance Limiting Curve

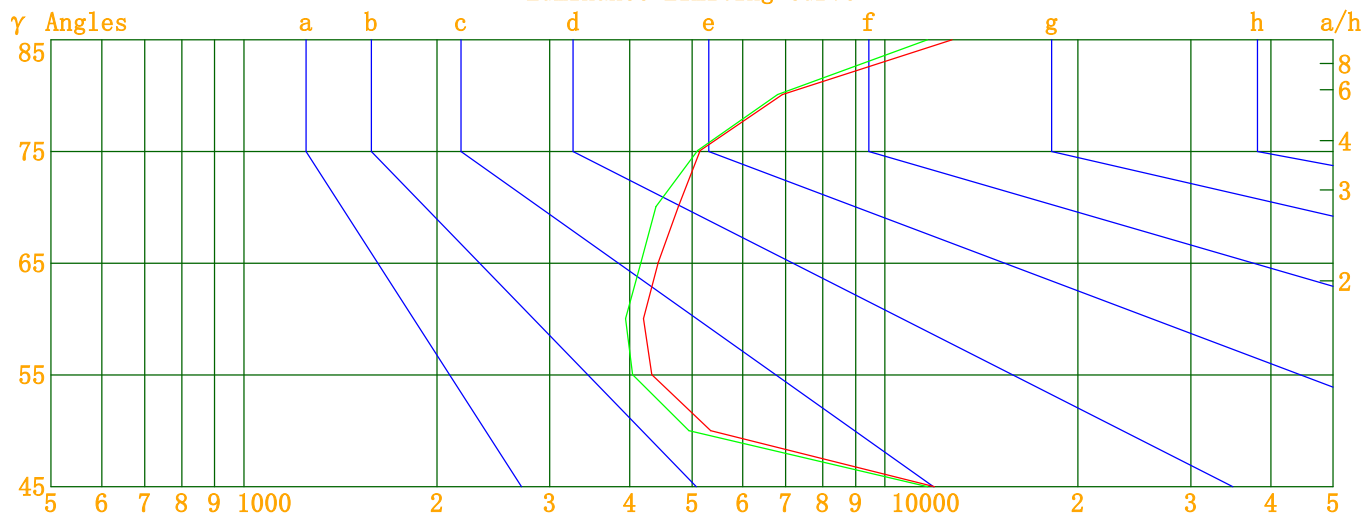


Luminous Size: Length(m)=-0.066 Width(m)=-0.066 Height(m)=0.000 Area(m^2)=0.003421
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Indoor Budgetary Estimate Table

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine: GON-2000	Test Date: 2023/06/30

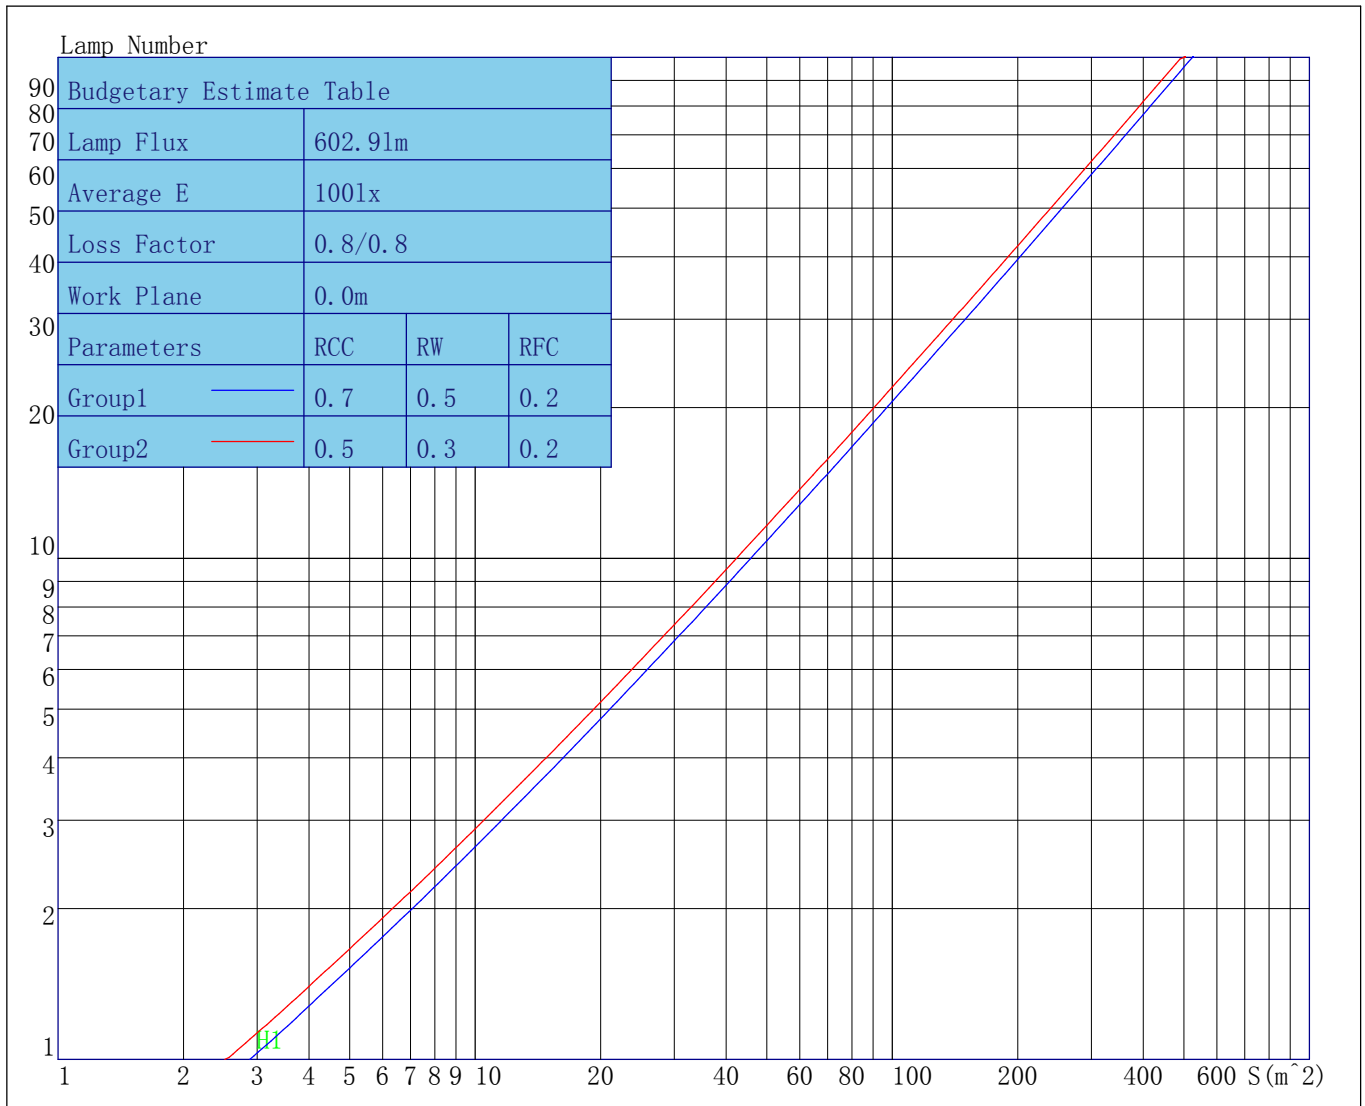

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
 Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
 Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Indoor Coefficient of Utilization Table

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	113	110	108	106	110	108	106	104	104	102	100	99	98	97	96	95	94	92
2	108	103	99	96	106	101	98	95	98	95	92	94	92	90	91	89	88	86
3	103	97	92	88	101	95	91	87	92	89	86	90	87	84	87	85	83	81
4	98	91	86	82	96	90	85	81	87	83	80	85	82	79	83	80	78	76
5	94	86	80	76	92	85	80	76	83	78	75	81	77	74	79	76	73	72
6	89	81	76	72	88	80	75	71	79	74	71	77	73	70	75	72	69	68
7	86	77	71	67	84	76	71	67	75	70	67	73	69	66	72	68	66	64
8	82	73	67	64	81	72	67	63	71	66	63	70	66	63	69	65	62	61
9	78	69	64	60	77	69	64	60	68	63	60	67	62	59	66	62	59	58
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	63	59	56	55

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Unified Glare Rating Table

Lum. Name: AW12541	Lum. Catalog: Down Light	Test ID:
Lamp Name: 1202C9	Lamp Catalog: COB	Test Lab: Test
Manufacture:	Test Machine:GON-2000	Test Date: 2023/06/30

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	16.3	17.3	16.7	17.6	18.0	16.1	17.0	16.5	17.4	17.7
	Y=3H	16.4	17.2	16.8	17.6	18.1	16.2	17.1	16.7	17.4	17.9
	Y=4H	16.6	17.3	17.0	17.7	18.2	16.4	17.2	16.9	17.6	18.0
	Y=6H	16.8	17.5	17.3	18.0	18.4	16.8	17.5	17.2	17.9	18.3
	Y=8H	17.1	17.7	17.6	18.2	18.7	17.0	17.7	17.5	18.1	18.6
	Y=12H	17.4	18.1	17.9	18.5	19.0	17.3	18.0	17.8	18.4	18.9
X=4H	Y=2H	16.1	16.9	16.6	17.3	17.7	15.9	16.7	16.4	17.1	17.5
	Y=3H	16.3	16.9	16.7	17.4	17.8	16.2	16.9	16.7	17.3	17.8
	Y=4H	16.5	17.1	17.0	17.5	18.0	16.6	17.1	17.1	17.6	18.1
	Y=6H	17.0	17.4	17.5	17.9	18.5	17.1	17.6	17.6	18.1	18.6
	Y=8H	17.3	17.8	17.8	18.3	18.8	17.5	18.0	18.0	18.5	19.0
	Y=12H	17.9	18.3	18.4	18.8	19.3	18.0	18.4	18.6	19.0	19.5
X=8H	Y=4H	16.5	16.9	17.0	17.4	18.0	16.7	17.1	17.2	17.6	18.2
	Y=6H	17.1	17.4	17.6	18.0	18.6	17.5	17.8	18.0	18.4	19.0
	Y=8H	17.6	17.9	18.1	18.4	19.0	18.0	18.3	18.6	18.9	19.5
	Y=12H	18.3	18.6	18.9	19.1	19.8	18.8	19.1	19.4	19.6	20.3
X=12H	Y=4H	16.5	16.9	17.0	17.4	17.9	16.7	17.1	17.2	17.6	18.2
	Y=6H	17.1	17.4	17.7	18.0	18.6	17.6	17.9	18.2	18.4	19.0
	Y=8H	17.7	18.0	18.2	18.5	19.1	18.2	18.5	18.8	19.1	19.7
Variations with the objverer position at spacings											
S=1.0H	0.1/-0.1					0.1/-0.1					
S=1.5H	0.2/-0.2					0.1/-0.2					
S=2.0H	0.2/-0.5					0.1/-0.1					
Reduced UGR Table:											
Nordic Standard Table:	BKO					BKO					
Correction Value	1.7					2.1					

o the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Candela Tabulation

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 0.0	995.22	995.22	995.22	995.22	995.22	995.22	995.22	995.22	995.22	995.22	995.22	995.22
γ 1.0	1002.66	997.74	993.62	990.61	989.21	988.67	987.64	986.88	997.01	994.23	993.96	991.79
γ 2.0	999.08	992.65	986.98	983.41	979.98	980.21	978.23	976.80	988.21	986.05	987.34	985.47
γ 3.0	990.33	983.71	976.27	971.96	968.16	967.46	964.48	963.23	974.41	973.43	976.80	975.39
γ 4.0	979.41	970.73	961.68	957.30	951.60	950.91	947.44	945.72	956.93	957.64	962.31	961.81
γ 5.0	963.76	953.63	943.22	938.40	931.92	930.95	926.94	924.90	936.63	938.55	944.18	944.54
γ 6.0	943.92	934.35	922.55	917.21	909.80	909.35	904.49	902.24	914.76	917.16	924.05	923.54
γ 7.0	923.81	913.48	900.82	895.93	887.02	886.82	881.73	878.58	890.66	894.43	901.34	901.08
γ 8.0	903.58	892.43	878.48	874.25	864.86	864.90	858.87	855.85	867.54	871.64	879.47	878.79
γ 9.0	883.65	872.63	858.14	854.02	844.35	844.77	838.12	834.48	846.30	850.51	858.67	857.36
γ 10.0	868.46	854.13	839.34	836.27	824.85	826.51	819.20	814.60	826.62	831.04	839.75	836.74
γ 11.0	855.56	837.37	821.85	818.24	807.11	808.22	800.51	795.96	808.32	813.50	822.03	817.23
γ 12.0	841.08	821.47	805.47	800.75	787.98	787.56	779.87	775.59	789.98	795.49	805.37	799.52
γ 13.0	825.20	803.08	786.72	782.33	767.72	765.21	754.89	750.52	766.59	773.28	786.69	781.35
γ 14.0	803.25	781.59	765.07	763.00	747.31	743.60	728.63	722.89	738.87	747.52	765.03	761.11
γ 15.0	779.65	758.50	741.56	739.28	724.10	718.86	702.35	694.17	710.89	720.66	740.97	739.25
γ 16.0	751.46	732.13	715.89	710.65	695.76	691.07	674.39	663.48	678.79	691.76	714.62	714.59
γ 17.0	720.40	702.93	687.21	679.95	664.60	661.61	645.22	632.72	645.77	661.83	685.23	685.36
γ 18.0	690.37	672.96	656.93	648.46	633.35	630.60	615.88	603.35	616.22	632.42	654.78	654.76
γ 19.0	658.28	640.65	623.73	614.71	599.53	596.98	584.82	573.96	587.04	602.14	623.34	623.23
γ 20.0	622.36	604.91	586.32	577.12	563.46	559.82	549.82	541.81	553.85	568.87	588.41	589.78
γ 21.0	583.11	565.80	545.61	535.83	522.89	518.85	510.89	505.69	517.35	531.85	550.32	552.47
γ 22.0	540.02	523.37	502.91	493.23	480.49	477.19	470.32	466.95	478.41	492.01	509.50	511.76
γ 23.0	498.33	480.44	460.84	451.74	439.59	437.19	430.64	428.71	439.11	451.87	467.81	470.36
γ 24.0	456.96	439.44	421.07	412.03	400.75	399.35	393.36	392.63	401.89	413.74	427.91	430.42
γ 25.0	417.62	400.56	383.74	375.57	365.23	364.48	358.74	359.49	367.52	377.86	390.32	392.73
γ 26.0	381.60	364.69	350.34	342.94	334.10	334.24	328.16	329.61	336.13	344.90	355.37	357.98
γ 27.0	349.11	332.92	321.23	314.64	307.41	307.88	302.33	303.70	309.34	316.67	324.64	327.20
γ 28.0	320.39	305.14	295.67	289.92	284.35	285.20	280.11	281.86	286.06	292.89	298.67	300.28
γ 29.0	295.07	280.85	272.28	267.05	263.03	264.53	260.40	262.45	265.70	272.01	276.29	277.23
γ 30.0	270.06	257.96	249.40	244.79	242.06	243.25	241.19	243.38	246.24	251.98	255.37	256.18
γ 31.0	244.58	234.96	226.53	222.37	220.53	222.52	221.49	223.44	226.06	231.37	234.55	235.08
γ 32.0	219.76	212.37	204.45	200.08	199.06	201.96	201.69	203.30	205.79	210.47	213.16	213.62
γ 33.0	195.54	189.80	182.63	178.11	177.51	180.87	181.51	183.69	185.55	189.62	191.97	192.19
γ 34.0	171.41	166.98	160.24	155.59	155.20	159.10	161.05	163.79	164.96	168.86	170.54	171.08
γ 35.0	147.90	143.59	137.32	132.29	131.83	135.73	139.05	142.61	144.05	147.54	148.61	149.57
γ 36.0	121.86	118.63	112.90	107.19	106.95	111.21	115.12	119.75	121.62	124.64	125.31	126.99
γ 37.0	96.54	93.70	88.79	83.22	82.55	86.46	91.05	95.89	97.40	99.89	100.55	102.47
γ 38.0	71.75	70.98	66.96	61.58	60.42	64.10	68.45	73.03	73.01	75.46	76.08	77.73
γ 39.0	52.87	52.69	49.41	45.53	43.73	46.75	50.56	54.01	52.37	54.09	54.32	55.49
γ 40.0	41.27	41.77	39.58	37.31	35.94	37.40	40.09	42.01	36.89	39.06	38.21	38.48
γ 41.0	36.64	37.25	36.38	34.24	33.19	33.94	35.90	36.95	30.51	31.72	30.45	30.26
γ 42.0	34.77	35.03	34.46	32.71	31.99	32.59	34.41	34.95	28.56	29.06	27.75	27.28
γ 43.0	32.69	33.24	32.46	31.38	30.79	31.20	33.08	33.53	27.29	27.72	26.43	25.96
γ 44.0	30.83	31.61	30.99	29.73	29.58	29.85	31.42	32.31	25.75	26.40	24.83	24.79
γ 45.0	28.90	29.48	29.09	28.17	28.22	28.60	30.03	30.78	24.59	25.17	23.64	23.67
γ 46.0	26.78	26.70	27.07	25.95	26.53	26.71	28.13	28.63	22.81	23.41	22.69	22.63

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 47.0	24.38	23.67	23.92	23.46	23.32	23.92	24.70	25.30	20.65	20.71	20.60	20.53
γ 48.0	18.95	18.78	18.18	17.06	16.78	18.08	18.87	19.82	16.73	16.13	16.65	16.97
γ 49.0	13.82	13.80	13.46	12.81	12.52	13.48	13.75	14.38	10.08	10.69	10.80	10.71
γ 50.0	11.75	11.59	11.44	10.83	10.88	11.15	11.43	11.56	6.64	7.28	7.44	6.77
γ 51.0	10.87	10.61	10.41	9.92	10.08	10.08	10.22	10.42	5.00	5.55	5.71	5.39
γ 52.0	10.15	9.88	9.91	9.31	9.25	9.53	9.54	9.66	4.41	4.62	4.90	4.63
γ 53.0	9.31	9.10	9.33	8.82	8.81	8.88	8.91	9.04	3.88	4.14	4.32	4.03
γ 54.0	8.72	8.52	8.69	8.33	8.26	8.51	8.46	8.58	3.20	3.52	3.66	3.53
γ 55.0	8.49	8.13	8.28	7.89	7.93	8.16	8.14	8.07	2.81	3.12	3.32	2.88
γ 56.0	8.30	7.91	8.04	7.72	7.65	7.73	7.99	7.67	2.68	2.96	3.12	2.71
γ 57.0	7.83	7.65	7.91	7.43	7.43	7.38	7.86	7.56	2.45	2.64	2.83	2.44
γ 58.0	7.52	7.33	7.65	7.39	7.02	7.12	7.45	7.51	2.42	2.44	2.69	2.49
γ 59.0	7.24	7.10	7.31	6.98	6.72	7.07	7.29	7.24	2.04	2.26	2.61	2.24
γ 60.0	7.18	6.84	7.30	6.96	6.74	7.03	7.13	6.89	2.00	2.08	2.42	2.08
γ 61.0	6.96	6.63	6.87	6.49	6.45	6.65	6.71	6.58	1.76	1.97	2.20	1.83
γ 62.0	6.55	6.49	6.72	6.33	6.36	6.38	6.55	6.42	1.57	1.88	1.88	1.79
γ 63.0	6.59	6.47	6.52	6.30	6.46	6.29	6.45	6.10	1.54	1.90	1.85	1.98
γ 64.0	6.61	6.35	6.35	6.00	6.24	6.07	6.33	5.92	1.35	1.85	1.93	1.68
γ 65.0	6.41	6.10	6.34	6.01	6.02	5.93	6.06	5.92	1.28	1.81	1.57	1.58
γ 66.0	6.18	5.94	6.07	5.97	5.78	5.88	5.85	5.84	1.30	1.71	1.71	1.68
γ 67.0	5.91	5.59	5.91	5.58	5.64	5.60	5.93	5.64	1.15	1.65	1.50	1.65
γ 68.0	5.88	5.51	5.77	5.43	5.46	5.44	5.76	5.43	1.28	1.56	1.43	1.42
γ 69.0	5.61	5.61	5.50	5.27	5.13	5.26	5.48	5.39	1.29	1.45	1.30	1.34
γ 70.0	5.57	5.50	5.59	4.99	5.14	5.10	5.41	5.33	0.99	1.44	1.34	1.49
γ 71.0	5.44	5.37	5.37	4.78	4.81	4.85	5.15	5.10	1.10	1.45	1.42	1.39
γ 72.0	5.32	5.12	5.11	4.72	4.83	4.82	5.09	4.91	1.16	1.27	1.53	1.30
γ 73.0	5.13	5.04	5.25	4.62	4.63	4.60	5.04	4.85	1.03	1.05	1.31	1.33
γ 74.0	4.68	4.86	5.02	4.57	4.55	4.57	4.89	4.61	0.77	1.19	1.17	1.10
γ 75.0	4.56	4.56	4.74	4.41	4.51	4.56	4.89	4.44	0.85	1.25	1.25	1.39
γ 76.0	4.66	4.63	4.68	4.28	4.65	4.16	4.48	4.33	0.99	1.16	1.36	1.48
γ 77.0	4.63	4.53	4.49	4.13	4.34	4.20	4.33	4.11	1.02	1.08	1.46	1.29
γ 78.0	4.42	4.38	4.49	4.01	4.16	4.11	4.32	4.09	0.77	1.13	1.66	1.25
γ 79.0	4.23	4.32	4.27	3.97	4.15	4.01	4.39	4.07	0.89	1.26	1.49	1.55
γ 80.0	4.11	4.14	4.36	3.98	4.04	3.83	4.41	4.03	0.88	1.21	1.31	1.17
γ 81.0	4.22	4.00	4.36	3.65	3.95	3.89	4.21	3.93	0.91	1.09	1.46	1.29
γ 82.0	4.04	3.78	4.07	3.59	3.79	3.81	3.83	3.78	0.81	1.21	1.30	1.39
γ 83.0	3.93	3.70	4.10	3.63	3.82	3.45	3.56	3.79	1.17	1.25	1.40	1.61
γ 84.0	3.88	3.75	3.89	3.54	3.46	3.50	3.51	3.83	1.22	1.27	1.44	1.42
γ 85.0	3.80	3.75	3.95	3.57	3.47	3.63	3.57	3.78	1.23	1.31	1.43	1.48
γ 86.0	3.64	3.49	3.79	3.44	3.69	3.44	3.73	3.39	1.32	1.25	1.61	1.62
γ 87.0	3.74	3.39	3.71	3.31	3.38	3.22	3.71	3.24	1.16	1.27	1.66	1.62
γ 88.0	3.49	3.42	3.54	3.08	3.30	3.15	3.61	3.23	1.36	1.20	1.55	1.62
γ 89.0	3.40	3.30	3.42	3.30	3.17	3.08	3.31	3.08	1.30	1.18	1.62	1.66
γ 90.0	3.27	3.33	3.43	3.05	3.12	3.15	3.19	2.97	1.34	1.29	1.54	1.50
γ 91.0	3.39	3.43	3.26	2.87	3.25	3.32	3.10	3.04	1.26	1.33	1.70	1.53
γ 92.0	3.28	3.31	3.29	3.07	3.15	3.22	3.16	3.24	1.20	1.37	1.70	1.54
γ 93.0	3.22	3.11	3.11	3.07	2.83	3.14	3.17	3.12	1.39	1.33	1.79	1.55

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 94.0	3.18	2.97	3.05	2.79	2.85	2.98	2.93	3.06	1.49	1.29	1.70	1.60
γ 95.0	3.12	2.74	3.14	2.91	2.97	2.98	2.87	3.13	1.65	1.40	1.80	1.58
γ 96.0	3.02	2.57	3.09	2.73	3.04	2.72	2.89	3.10	1.30	1.31	1.72	1.68
γ 97.0	3.18	2.61	3.01	2.95	2.99	2.86	2.93	3.00	1.31	1.39	1.81	1.66
γ 98.0	3.44	2.88	2.84	2.86	2.93	2.89	2.70	2.85	1.16	1.47	1.86	1.62
γ 99.0	2.90	2.94	2.97	2.64	2.85	2.61	2.66	2.85	1.29	1.36	1.94	1.77
γ 100.0	3.08	2.71	2.73	2.60	2.63	2.71	2.64	2.73	1.52	1.55	2.04	2.12
γ 101.0	2.80	2.66	2.80	2.79	2.49	2.68	2.67	2.58	1.56	1.65	2.09	1.97
γ 102.0	2.77	2.52	2.76	2.61	2.62	2.50	2.96	2.67	1.41	1.70	1.97	1.80
γ 103.0	3.03	2.54	2.76	2.42	2.69	2.54	2.96	2.67	1.59	1.62	2.10	1.85
γ 104.0	2.56	2.60	2.40	2.45	2.40	2.63	2.80	2.59	1.64	1.69	1.90	1.86
γ 105.0	2.89	2.32	2.46	2.58	2.43	2.47	2.56	2.61	1.82	1.86	1.91	1.85
γ 106.0	2.68	2.25	2.37	2.40	2.30	2.22	2.54	2.50	1.52	1.72	1.81	1.84
γ 107.0	2.61	2.32	2.37	2.47	2.37	2.38	2.60	2.44	1.65	1.76	1.82	1.89
γ 108.0	2.76	2.19	2.56	2.44	2.44	2.35	2.70	2.40	1.74	1.84	2.03	1.86
γ 109.0	2.41	2.03	2.68	2.35	2.46	2.19	2.68	2.33	1.45	1.88	2.01	1.88
γ 110.0	2.60	2.04	2.26	2.62	2.57	1.90	2.74	2.30	1.45	1.84	2.01	1.99
γ 111.0	2.46	2.03	2.41	2.52	2.19	2.02	2.56	2.22	1.58	1.82	2.13	2.07
γ 112.0	2.54	1.98	2.46	2.23	2.39	2.05	2.33	2.31	1.56	1.69	2.16	2.18
γ 113.0	2.59	2.02	2.49	2.33	2.08	1.96	2.31	2.45	1.51	1.70	2.16	2.16
γ 114.0	2.20	1.87	2.76	2.26	1.76	1.98	2.41	2.38	1.54	1.88	2.10	2.03
γ 115.0	2.24	1.81	2.74	2.35	2.12	2.03	2.37	2.29	1.68	1.78	2.20	1.92
γ 116.0	2.22	1.85	2.79	2.37	2.18	2.31	2.32	2.20	1.58	1.68	2.20	1.84
γ 117.0	2.01	1.80	2.63	2.42	2.05	2.09	2.37	2.10	1.32	1.74	2.12	1.70
γ 118.0	2.23	1.93	2.48	2.35	2.09	2.14	2.22	2.01	1.66	1.85	2.25	1.96
γ 119.0	2.16	1.94	2.38	2.37	2.20	1.90	2.25	1.98	1.66	2.00	2.40	2.02
γ 120.0	2.28	1.74	2.31	2.33	2.23	1.86	2.25	1.94	1.48	1.91	2.50	1.78
γ 121.0	2.17	1.86	2.27	2.09	2.13	2.02	2.35	2.04	1.76	1.68	2.19	1.88
γ 122.0	2.16	2.03	2.24	2.39	2.01	1.88	2.21	2.11	1.78	1.81	2.11	2.13
γ 123.0	2.27	1.89	2.30	2.31	1.94	2.05	2.08	1.89	1.66	1.90	2.17	2.12
γ 124.0	2.48	1.80	2.53	2.15	1.84	2.03	2.16	2.00	1.97	1.75	2.18	1.99
γ 125.0	2.19	1.82	2.41	2.12	1.99	1.90	2.30	2.20	1.71	1.79	2.27	1.89
γ 126.0	2.21	1.86	2.24	2.09	1.98	1.93	2.41	2.04	1.77	1.90	2.11	2.17
γ 127.0	2.46	1.88	2.38	2.10	2.04	2.05	2.41	2.02	1.79	1.90	2.20	2.16
γ 128.0	2.37	1.95	2.52	2.25	1.92	1.94	2.22	2.13	1.91	1.96	2.25	2.26
γ 129.0	2.22	2.00	2.43	2.08	1.86	1.92	2.13	2.10	1.87	1.99	2.32	2.15
γ 130.0	2.33	1.87	2.26	2.10	1.84	1.90	2.25	2.11	1.89	2.01	2.41	2.17
γ 131.0	2.29	1.85	2.35	2.39	2.04	2.04	2.22	2.09	1.66	1.98	2.55	1.90
γ 132.0	2.23	1.95	2.61	2.40	1.92	2.05	2.27	2.13	1.67	2.06	2.51	2.03
γ 133.0	2.36	1.94	2.40	2.29	1.92	1.91	2.24	2.15	1.84	2.18	2.46	2.16
γ 134.0	2.42	1.97	2.18	2.32	2.29	1.73	2.22	2.15	2.03	2.10	2.35	2.26
γ 135.0	2.38	2.01	2.41	2.20	2.17	1.86	2.39	2.19	1.88	2.03	2.39	2.31
γ 136.0	2.31	1.95	2.52	2.34	1.92	2.11	2.51	2.32	1.90	2.12	2.25	2.39
γ 137.0	2.24	1.91	2.40	2.44	2.18	2.20	2.47	2.38	1.89	2.16	2.10	2.37
γ 138.0	2.05	1.95	2.39	2.34	2.33	2.10	2.44	2.25	1.97	2.13	2.38	2.27
γ 139.0	2.18	2.10	2.47	2.52	1.86	2.15	2.45	2.24	2.19	2.09	2.33	2.39
γ 140.0	2.15	2.37	2.43	2.49	2.31	2.01	2.61	2.49	1.99	2.08	2.49	2.27

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Candela Tabulation - (Cont.)

V/H	C0. 0	C22. 5	C45. 0	C67. 5	C90. 0	C112. 5	C135. 0	C157. 5	C180. 0	C202. 5	C225. 0	C247. 5
γ 141. 0	2. 32	2. 31	2. 61	2. 53	2. 13	2. 38	2. 62	2. 53	2. 11	2. 07	2. 41	2. 31
γ 142. 0	2. 42	2. 17	2. 78	2. 75	2. 15	2. 34	2. 55	2. 45	1. 95	2. 13	2. 43	2. 44
γ 143. 0	2. 24	2. 34	2. 67	2. 77	2. 40	2. 38	2. 57	2. 58	2. 26	2. 27	2. 47	2. 36
γ 144. 0	2. 45	2. 44	2. 55	2. 72	2. 33	2. 38	2. 69	2. 64	2. 05	2. 37	2. 65	2. 43
γ 145. 0	2. 52	2. 41	2. 72	2. 78	2. 46	2. 38	2. 72	2. 55	2. 31	2. 26	2. 86	2. 53
γ 146. 0	2. 41	2. 49	2. 87	2. 81	2. 51	2. 46	2. 67	2. 48	2. 32	2. 13	2. 82	2. 65
γ 147. 0	2. 82	2. 40	2. 84	2. 89	2. 76	2. 56	2. 72	2. 63	2. 16	2. 19	2. 82	2. 59
γ 148. 0	2. 55	2. 33	2. 79	2. 97	2. 65	2. 63	2. 66	2. 72	2. 29	2. 22	2. 74	2. 58
γ 149. 0	2. 86	2. 56	2. 70	2. 89	2. 69	2. 62	2. 78	2. 51	2. 35	2. 38	2. 76	2. 59
γ 150. 0	2. 67	2. 59	2. 80	2. 94	2. 66	2. 63	2. 71	2. 45	2. 40	2. 44	3. 01	2. 54
γ 151. 0	2. 61	2. 46	2. 80	3. 00	2. 79	2. 89	2. 79	2. 63	2. 48	2. 30	2. 91	2. 68
γ 152. 0	2. 59	2. 56	2. 75	2. 91	2. 88	2. 91	2. 85	2. 66	2. 67	2. 32	2. 91	2. 64
γ 153. 0	2. 61	2. 55	2. 73	2. 96	2. 68	2. 70	2. 77	2. 63	2. 76	2. 51	3. 00	2. 54
γ 154. 0	2. 98	2. 53	2. 78	2. 95	2. 57	2. 78	2. 92	2. 67	2. 70	2. 64	3. 09	2. 83
γ 155. 0	2. 88	2. 72	2. 81	2. 94	2. 64	2. 74	2. 98	2. 80	2. 72	2. 66	3. 12	3. 13
γ 156. 0	2. 94	2. 71	3. 07	2. 85	2. 97	2. 83	3. 09	2. 84	2. 78	2. 69	3. 00	3. 12
γ 157. 0	3. 02	2. 64	3. 07	2. 92	3. 06	2. 94	3. 03	2. 82	2. 67	2. 65	3. 05	2. 84
γ 158. 0	3. 15	2. 78	2. 82	3. 16	2. 87	3. 05	3. 01	2. 88	2. 63	2. 50	2. 91	2. 88
γ 159. 0	2. 99	3. 02	2. 97	3. 20	3. 16	2. 85	3. 01	2. 95	2. 68	2. 53	3. 11	3. 04
γ 160. 0	2. 74	3. 08	3. 21	3. 10	2. 90	2. 86	3. 02	2. 99	2. 56	2. 76	3. 13	3. 09
γ 161. 0	3. 23	3. 11	3. 09	3. 24	3. 09	2. 85	3. 17	2. 99	3. 04	2. 86	3. 08	3. 02
γ 162. 0	3. 35	3. 23	3. 25	3. 01	2. 89	2. 91	3. 29	3. 01	2. 98	2. 83	3. 04	3. 17
γ 163. 0	3. 42	3. 22	3. 16	3. 13	3. 18	2. 95	3. 26	2. 98	3. 12	2. 90	3. 27	2. 98
γ 164. 0	3. 09	3. 30	3. 08	3. 25	3. 23	2. 87	3. 21	3. 10	3. 08	2. 91	3. 13	3. 07
γ 165. 0	3. 30	3. 30	3. 31	3. 52	3. 21	2. 91	3. 17	3. 20	3. 08	2. 94	3. 09	3. 09
γ 166. 0	3. 20	3. 23	3. 27	3. 43	3. 19	2. 90	3. 26	3. 14	3. 11	2. 94	3. 15	3. 23
γ 167. 0	3. 40	3. 29	3. 04	3. 41	2. 95	2. 93	3. 52	3. 15	3. 08	3. 00	3. 05	3. 18
γ 168. 0	3. 48	3. 34	3. 25	3. 50	3. 03	2. 79	3. 54	3. 13	3. 17	3. 22	3. 20	3. 27
γ 169. 0	3. 49	3. 52	3. 16	3. 50	3. 44	2. 95	3. 43	3. 25	3. 13	3. 17	3. 25	3. 12
γ 170. 0	3. 54	3. 54	3. 39	3. 61	3. 36	3. 18	3. 61	3. 29	3. 13	3. 09	3. 23	3. 30
γ 171. 0	3. 58	3. 31	3. 26	3. 59	3. 32	3. 00	3. 47	3. 23	3. 32	3. 18	3. 12	3. 43
γ 172. 0	3. 59	3. 36	3. 63	3. 52	3. 09	2. 94	3. 49	3. 28	3. 41	3. 34	3. 21	3. 54
γ 173. 0	3. 23	3. 49	3. 51	3. 47	3. 38	2. 97	3. 46	3. 27	3. 68	3. 41	3. 09	3. 54
γ 174. 0	3. 54	3. 37	3. 44	3. 58	3. 53	3. 03	3. 50	3. 16	3. 90	3. 30	3. 31	3. 38
γ 175. 0	3. 29	3. 30	3. 51	3. 35	3. 34	2. 98	3. 57	3. 11	3. 42	3. 45	3. 25	3. 29
γ 176. 0	3. 23	3. 34	3. 70	3. 27	3. 42	2. 96	3. 63	3. 36	3. 40	3. 41	3. 39	3. 44
γ 177. 0	3. 11	3. 33	3. 91	3. 43	3. 55	3. 16	3. 58	3. 48	3. 23	3. 24	3. 34	3. 60
γ 178. 0	3. 10	3. 35	3. 77	3. 46	3. 25	3. 47	3. 44	3. 37	3. 46	3. 49	3. 27	3. 76
γ 179. 0	3. 28	3. 50	3. 73	3. 43	3. 34	3. 38	3. 34	3. 25	3. 51	3. 65	3. 32	3. 60
γ 180. 0	3. 46	3. 46	3. 46	3. 46	3. 46	3. 46	3. 46	3. 46	3. 46	3. 46	3. 46	3. 46
V/H	C270. 0	C292. 5	C315. 0	C337. 5								
γ 0. 0	995. 22	995. 22	995. 22	995. 22								
γ 1. 0	992. 37	993. 55	994. 06	994. 12								
γ 2. 0	987. 55	989. 46	990. 74	991. 80								
γ 3. 0	979. 01	981. 59	983. 64	984. 40								
γ 4. 0	966. 89	969. 85	972. 90	973. 51								
γ 5. 0	950. 29	953. 90	958. 11	958. 81								

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 6. 0	931. 25	935. 34	940. 32	940. 91
γ 7. 0	909. 87	914. 87	920. 13	921. 16
γ 8. 0	887. 53	892. 82	898. 48	900. 18
γ 9. 0	865. 76	871. 97	878. 43	880. 39
γ 10. 0	845. 82	851. 75	859. 17	862. 06
γ 11. 0	827. 40	832. 13	841. 78	845. 56
γ 12. 0	810. 27	814. 27	825. 82	830. 55
γ 13. 0	793. 12	797. 16	809. 24	815. 08
γ 14. 0	775. 22	778. 89	790. 15	796. 22
γ 15. 0	755. 07	757. 57	767. 76	772. 98
γ 16. 0	730. 47	732. 78	742. 45	745. 47
γ 17. 0	701. 71	704. 88	714. 15	715. 54
γ 18. 0	670. 28	675. 32	684. 87	685. 57
γ 19. 0	639. 35	644. 22	654. 02	654. 04
γ 20. 0	604. 21	609. 79	619. 19	618. 93
γ 21. 0	566. 66	570. 64	580. 14	580. 03
γ 22. 0	525. 22	528. 34	537. 86	538. 56
γ 23. 0	483. 21	485. 91	494. 76	496. 25
γ 24. 0	442. 11	444. 26	452. 74	454. 89
γ 25. 0	402. 89	404. 46	412. 65	415. 25
γ 26. 0	366. 11	367. 23	375. 48	378. 21
γ 27. 0	333. 62	333. 70	341. 61	344. 69
γ 28. 0	305. 58	304. 56	311. 91	314. 76
γ 29. 0	281. 04	278. 87	285. 78	287. 97
γ 30. 0	258. 05	255. 71	261. 23	262. 60
γ 31. 0	235. 99	232. 73	236. 95	237. 67
γ 32. 0	213. 50	209. 52	212. 67	213. 29
γ 33. 0	191. 68	187. 01	189. 20	189. 37
γ 34. 0	170. 31	165. 25	166. 90	166. 12
γ 35. 0	148. 74	143. 61	144. 48	142. 86
γ 36. 0	126. 22	120. 83	121. 23	118. 60
γ 37. 0	101. 76	97. 56	97. 00	93. 77
γ 38. 0	77. 29	74. 27	73. 62	70. 04
γ 39. 0	55. 24	53. 65	53. 03	50. 10
γ 40. 0	38. 86	38. 34	38. 44	36. 79
γ 41. 0	30. 37	30. 22	31. 38	30. 55
γ 42. 0	27. 38	27. 34	28. 68	27. 94
γ 43. 0	25. 87	25. 65	26. 99	26. 12
γ 44. 0	24. 30	24. 24	25. 30	24. 44
γ 45. 0	23. 21	22. 70	23. 53	22. 87
γ 46. 0	21. 72	20. 97	21. 35	21. 01
γ 47. 0	19. 55	18. 65	18. 98	18. 68
γ 48. 0	16. 53	15. 40	15. 13	14. 48
γ 49. 0	10. 62	9. 72	9. 79	9. 51
γ 50. 0	7. 12	6. 51	6. 69	6. 58
γ 51. 0	5. 59	5. 01	5. 34	5. 24
γ 52. 0	4. 73	4. 28	4. 53	4. 76

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 53.0	4.24	3.84	3.86	4.30
γ 54.0	3.90	3.11	3.36	3.75
γ 55.0	3.24	3.05	3.06	3.45
γ 56.0	3.22	2.66	2.93	3.29
γ 57.0	2.84	2.28	2.75	2.99
γ 58.0	2.54	2.07	2.45	2.74
γ 59.0	2.22	1.95	2.35	2.46
γ 60.0	2.09	1.70	2.16	2.25
γ 61.0	2.18	1.42	2.14	2.22
γ 62.0	1.88	1.53	2.03	2.21
γ 63.0	1.74	1.61	1.67	2.14
γ 64.0	1.90	1.44	1.63	1.71
γ 65.0	1.76	1.29	1.62	1.53
γ 66.0	1.55	1.25	1.51	1.54
γ 67.0	1.35	1.39	1.47	1.51
γ 68.0	1.47	1.21	1.41	1.49
γ 69.0	1.33	1.00	1.35	1.46
γ 70.0	1.33	0.93	1.27	1.58
γ 71.0	1.38	0.94	1.09	1.53
γ 72.0	1.16	0.83	1.04	1.44
γ 73.0	1.15	0.70	1.00	1.38
γ 74.0	0.94	0.71	0.86	1.35
γ 75.0	1.00	0.84	0.73	1.40
γ 76.0	1.02	0.90	0.87	1.30
γ 77.0	1.09	0.81	0.88	1.20
γ 78.0	0.82	0.87	0.83	1.16
γ 79.0	1.18	0.85	0.80	0.95
γ 80.0	1.12	0.98	0.96	1.01
γ 81.0	1.22	0.92	1.04	1.19
γ 82.0	1.17	0.85	0.99	1.06
γ 83.0	1.07	0.78	1.01	1.07
γ 84.0	1.21	0.91	1.04	1.16
γ 85.0	1.12	0.95	1.01	1.18
γ 86.0	0.98	0.99	0.85	1.24
γ 87.0	1.27	0.99	0.96	1.23
γ 88.0	1.34	1.06	0.99	1.25
γ 89.0	1.27	1.05	1.13	1.32
γ 90.0	1.52	1.04	1.08	1.32
γ 91.0	1.25	1.04	0.95	1.25
γ 92.0	1.34	1.28	1.06	1.41
γ 93.0	1.42	1.41	0.96	1.67
γ 94.0	1.59	1.47	1.10	1.70
γ 95.0	1.67	1.39	1.31	1.62
γ 96.0	1.57	1.44	1.27	1.66
γ 97.0	1.35	1.49	1.21	1.61
γ 98.0	1.36	1.43	1.39	1.57
γ 99.0	1.60	1.33	1.40	1.65

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 100.0	1.73	1.26	1.33	1.72
γ 101.0	1.76	1.46	1.41	1.85
γ 102.0	1.59	1.43	1.38	1.77
γ 103.0	1.55	1.49	1.27	1.74
γ 104.0	1.55	1.51	1.42	1.86
γ 105.0	1.70	1.32	1.53	1.89
γ 106.0	1.81	1.36	1.34	1.84
γ 107.0	1.82	1.37	1.32	1.67
γ 108.0	1.79	1.39	1.37	1.63
γ 109.0	2.01	1.70	1.38	1.86
γ 110.0	1.88	1.42	1.26	1.93
γ 111.0	1.72	1.45	1.32	1.82
γ 112.0	1.76	1.36	1.44	1.81
γ 113.0	1.65	1.41	1.29	1.78
γ 114.0	1.73	1.78	1.32	1.67
γ 115.0	1.79	1.87	1.43	1.73
γ 116.0	1.96	1.74	1.38	1.60
γ 117.0	1.57	1.60	1.49	1.41
γ 118.0	1.82	1.54	1.55	1.39
γ 119.0	1.73	1.48	1.65	1.55
γ 120.0	1.59	1.62	1.68	1.92
γ 121.0	1.75	1.67	1.82	2.12
γ 122.0	1.57	1.67	1.70	1.98
γ 123.0	1.77	1.47	1.67	1.86
γ 124.0	1.87	1.55	1.72	1.96
γ 125.0	1.81	1.65	1.83	1.80
γ 126.0	1.74	1.66	1.98	1.76
γ 127.0	1.78	1.62	1.88	1.91
γ 128.0	1.81	1.76	1.81	1.89
γ 129.0	1.79	1.77	1.85	1.91
γ 130.0	1.70	1.86	1.92	2.02
γ 131.0	1.71	1.91	1.84	2.02
γ 132.0	2.08	1.85	1.89	1.95
γ 133.0	1.74	1.68	1.93	1.94
γ 134.0	1.77	1.59	1.92	2.09
γ 135.0	1.69	1.79	1.81	2.10
γ 136.0	1.90	1.88	1.66	1.93
γ 137.0	1.89	1.95	1.82	1.94
γ 138.0	2.05	2.18	1.93	1.98
γ 139.0	2.04	2.24	1.97	2.06
γ 140.0	2.15	2.19	2.08	2.15
γ 141.0	2.23	2.31	2.05	2.21
γ 142.0	2.27	2.38	2.01	2.34
γ 143.0	1.93	2.32	2.01	2.35
γ 144.0	2.14	2.43	2.08	2.23
γ 145.0	1.88	2.68	2.05	2.28
γ 146.0	2.05	2.33	2.16	2.45

IES Indoor Report

Photometric Filename:AW12541 8W 1202C9 3090 ZHT35-60D 200.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 147. 0	1. 95	2. 33	2. 25	2. 62
γ 148. 0	2. 09	2. 39	2. 12	2. 66
γ 149. 0	2. 24	2. 64	2. 25	2. 55
γ 150. 0	2. 22	2. 49	2. 38	2. 52
γ 151. 0	2. 30	2. 31	2. 30	2. 62
γ 152. 0	2. 48	2. 47	2. 39	2. 60
γ 153. 0	2. 54	2. 37	2. 46	2. 45
γ 154. 0	2. 55	2. 35	2. 50	2. 61
γ 155. 0	2. 65	2. 73	2. 72	2. 74
γ 156. 0	2. 47	2. 71	2. 84	2. 68
γ 157. 0	2. 33	2. 65	2. 78	2. 76
γ 158. 0	2. 47	2. 73	2. 72	2. 77
γ 159. 0	2. 39	2. 75	2. 83	2. 80
γ 160. 0	2. 55	2. 59	2. 92	2. 84
γ 161. 0	2. 57	2. 65	2. 77	2. 74
γ 162. 0	2. 85	2. 67	2. 98	2. 92
γ 163. 0	2. 63	2. 47	3. 16	3. 03
γ 164. 0	2. 71	2. 77	3. 20	2. 87
γ 165. 0	2. 61	2. 99	3. 22	2. 95
γ 166. 0	2. 75	2. 82	3. 20	2. 95
γ 167. 0	2. 96	2. 84	3. 08	3. 13
γ 168. 0	3. 10	3. 06	3. 17	3. 21
γ 169. 0	3. 03	2. 95	3. 25	3. 08
γ 170. 0	3. 16	2. 87	3. 14	3. 15
γ 171. 0	3. 16	2. 85	3. 19	3. 06
γ 172. 0	3. 10	2. 85	3. 36	3. 10
γ 173. 0	3. 02	3. 14	3. 57	3. 14
γ 174. 0	2. 89	3. 23	3. 48	3. 01
γ 175. 0	3. 10	2. 98	3. 48	3. 13
γ 176. 0	3. 42	3. 13	3. 57	3. 38
γ 177. 0	3. 32	3. 20	3. 64	3. 53
γ 178. 0	3. 43	3. 16	3. 58	3. 41
γ 179. 0	3. 54	3. 15	3. 60	3. 25
γ 180. 0	3. 46	3. 46	3. 46	3. 46
